


PROPOSAL B — BIOCLIMATIC LOUVRED PERGOLA LOUNGE

Freestanding motorised aluminium louvre roof over a lounge, built-in bench on the planter, large-format porcelain paving, zip screen & heaters.

AXONOMETRIC FROM SOUTH-EAST (east wall cut away at 1.0 m) — NTS

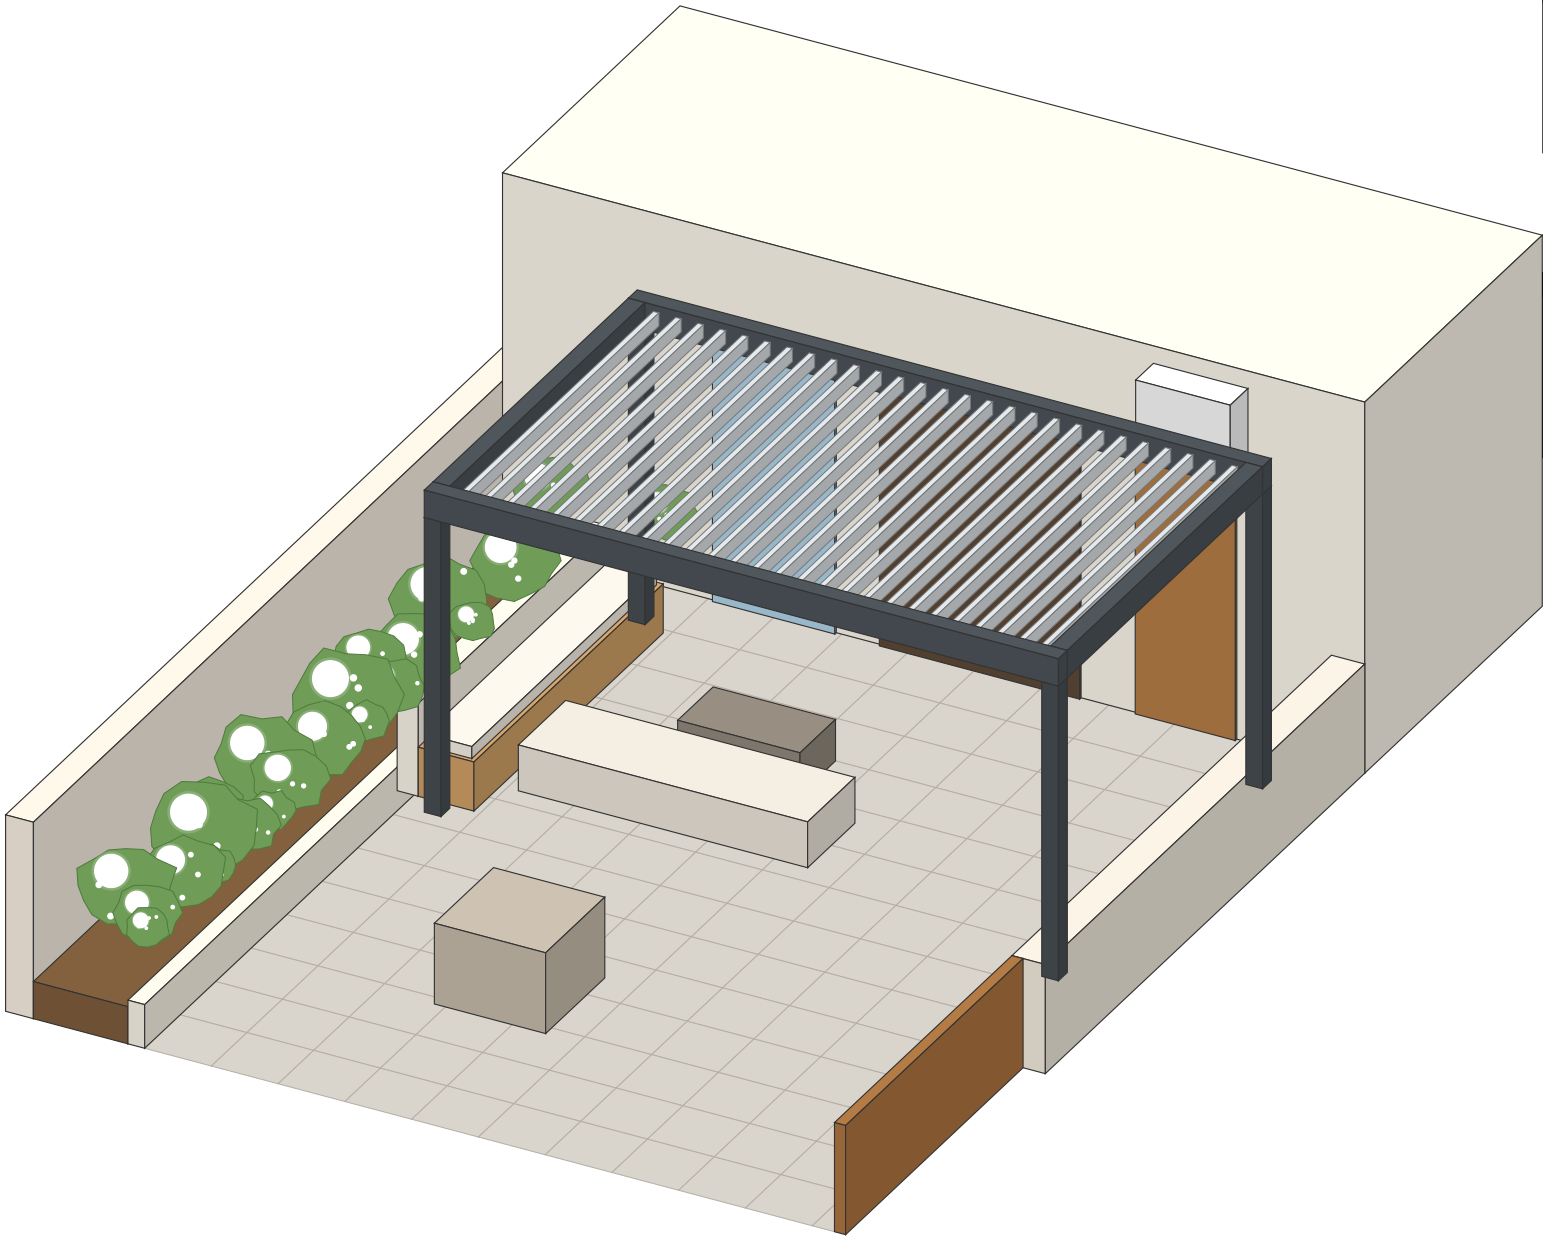

CONCEPT
A freestanding 5.7 x 3.6 m bioclimatic pergola replaces the fixed canopy: rotating blades give shade, ventilation or full rain-cover at the touch of a button. Because it stands on its own 4 posts it puts no load on the existing annex — the main structural risk of Design A disappears.

- KEY FEATURES**
- Louvres 0–135°, rain sensor auto-close, wind sensor open.
 - Lounge zone with 3.2 m built-in iroko bench against the raised planter.
 - 600x600 porcelain paving, warm greige, R11 anti-slip.
 - Integrated dimmable LED, 2 IR heaters, east zip screen hides AC/wall.

DRAWING REGISTER

No.	Title
B-000	Cover, concept & register
B-100	General arrangement plan 1:50
B-101	Pergola roof & structure plan 1:25
B-200	Elevation A 1:25
B-300	Section B-B (E-W) 1:25
B-500	Details 1:10 / 1:5
B-600	Schedules & BOQ

COMPARISON WITH DESIGN A

Criterion	Design A	Prop. B
Roof	Fixed, membrane	Adjustable louvres
Load on façade	Yes (ledger)	None
Survey of annex	Required	Not required
Winter use	Medium	High (heaters)
Rain protection	Full	Full when closed
Cost class	€€	€€€
Lead time	4–6 wk	6–8 wk (system)
Maintenance	Oil timber	Wash, sensors

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

- Do not scale from this drawing. Use figured dimensions only.
- All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
- Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
- Read with all other architectural, structural & services drawings and the specification notes (A-001).
- Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
- Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE

Proposal B — cover, concept & drawing register

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

B-000 **C01**

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)


DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE
Proposal B — general arrangement plan

SCALE @ A3 1:50	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL


DRAWING No. REV

B-100 C01

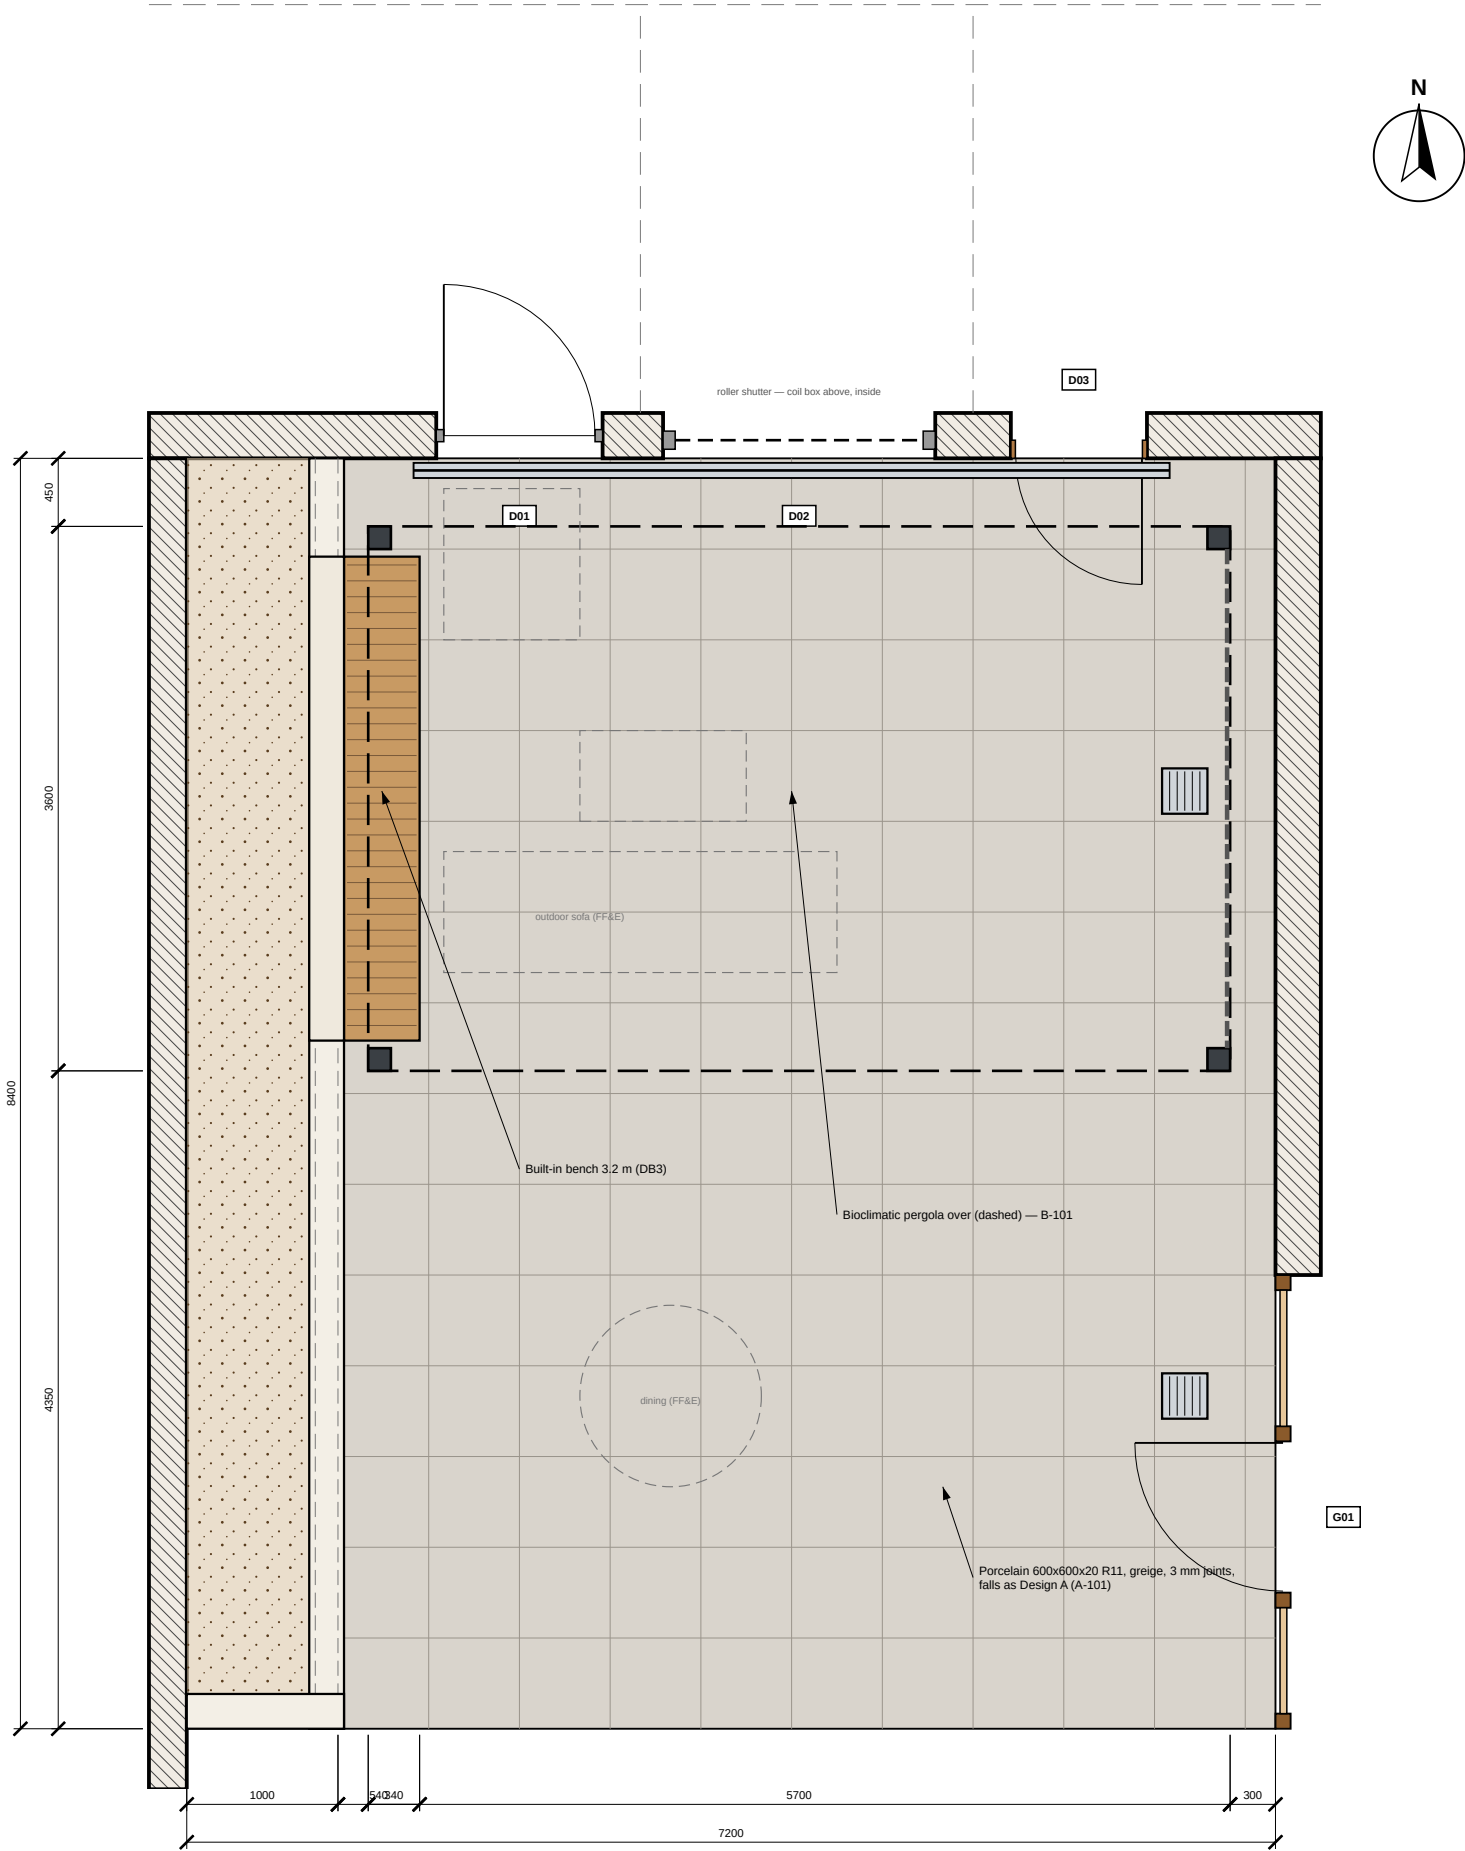

1 GENERAL ARRANGEMENT PLAN
B-100 1:50 @ A3

- NOTES**
- Existing walls, doors D01–D03, planter, G01 screen & drainage as Design A unless noted.
 - Pergola is freestanding: 450 mm clear of façade (AC1 unit stays). Optional fabric gap-closer.
 - Post positions to be confirmed by supplier — keep clear of gullies G1/G2 and D03 swing.
 - Porcelain: R11, PEI V, frost resistant, 20 mm; joints 3 mm polymer jointing compound.
 - Planting as A-104; jasmine on SS wires on post faces optional.



COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)


DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE
Proposal B — pergola roof & structure plan

SCALE @ A3 1:25	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. REV

B-101 C01

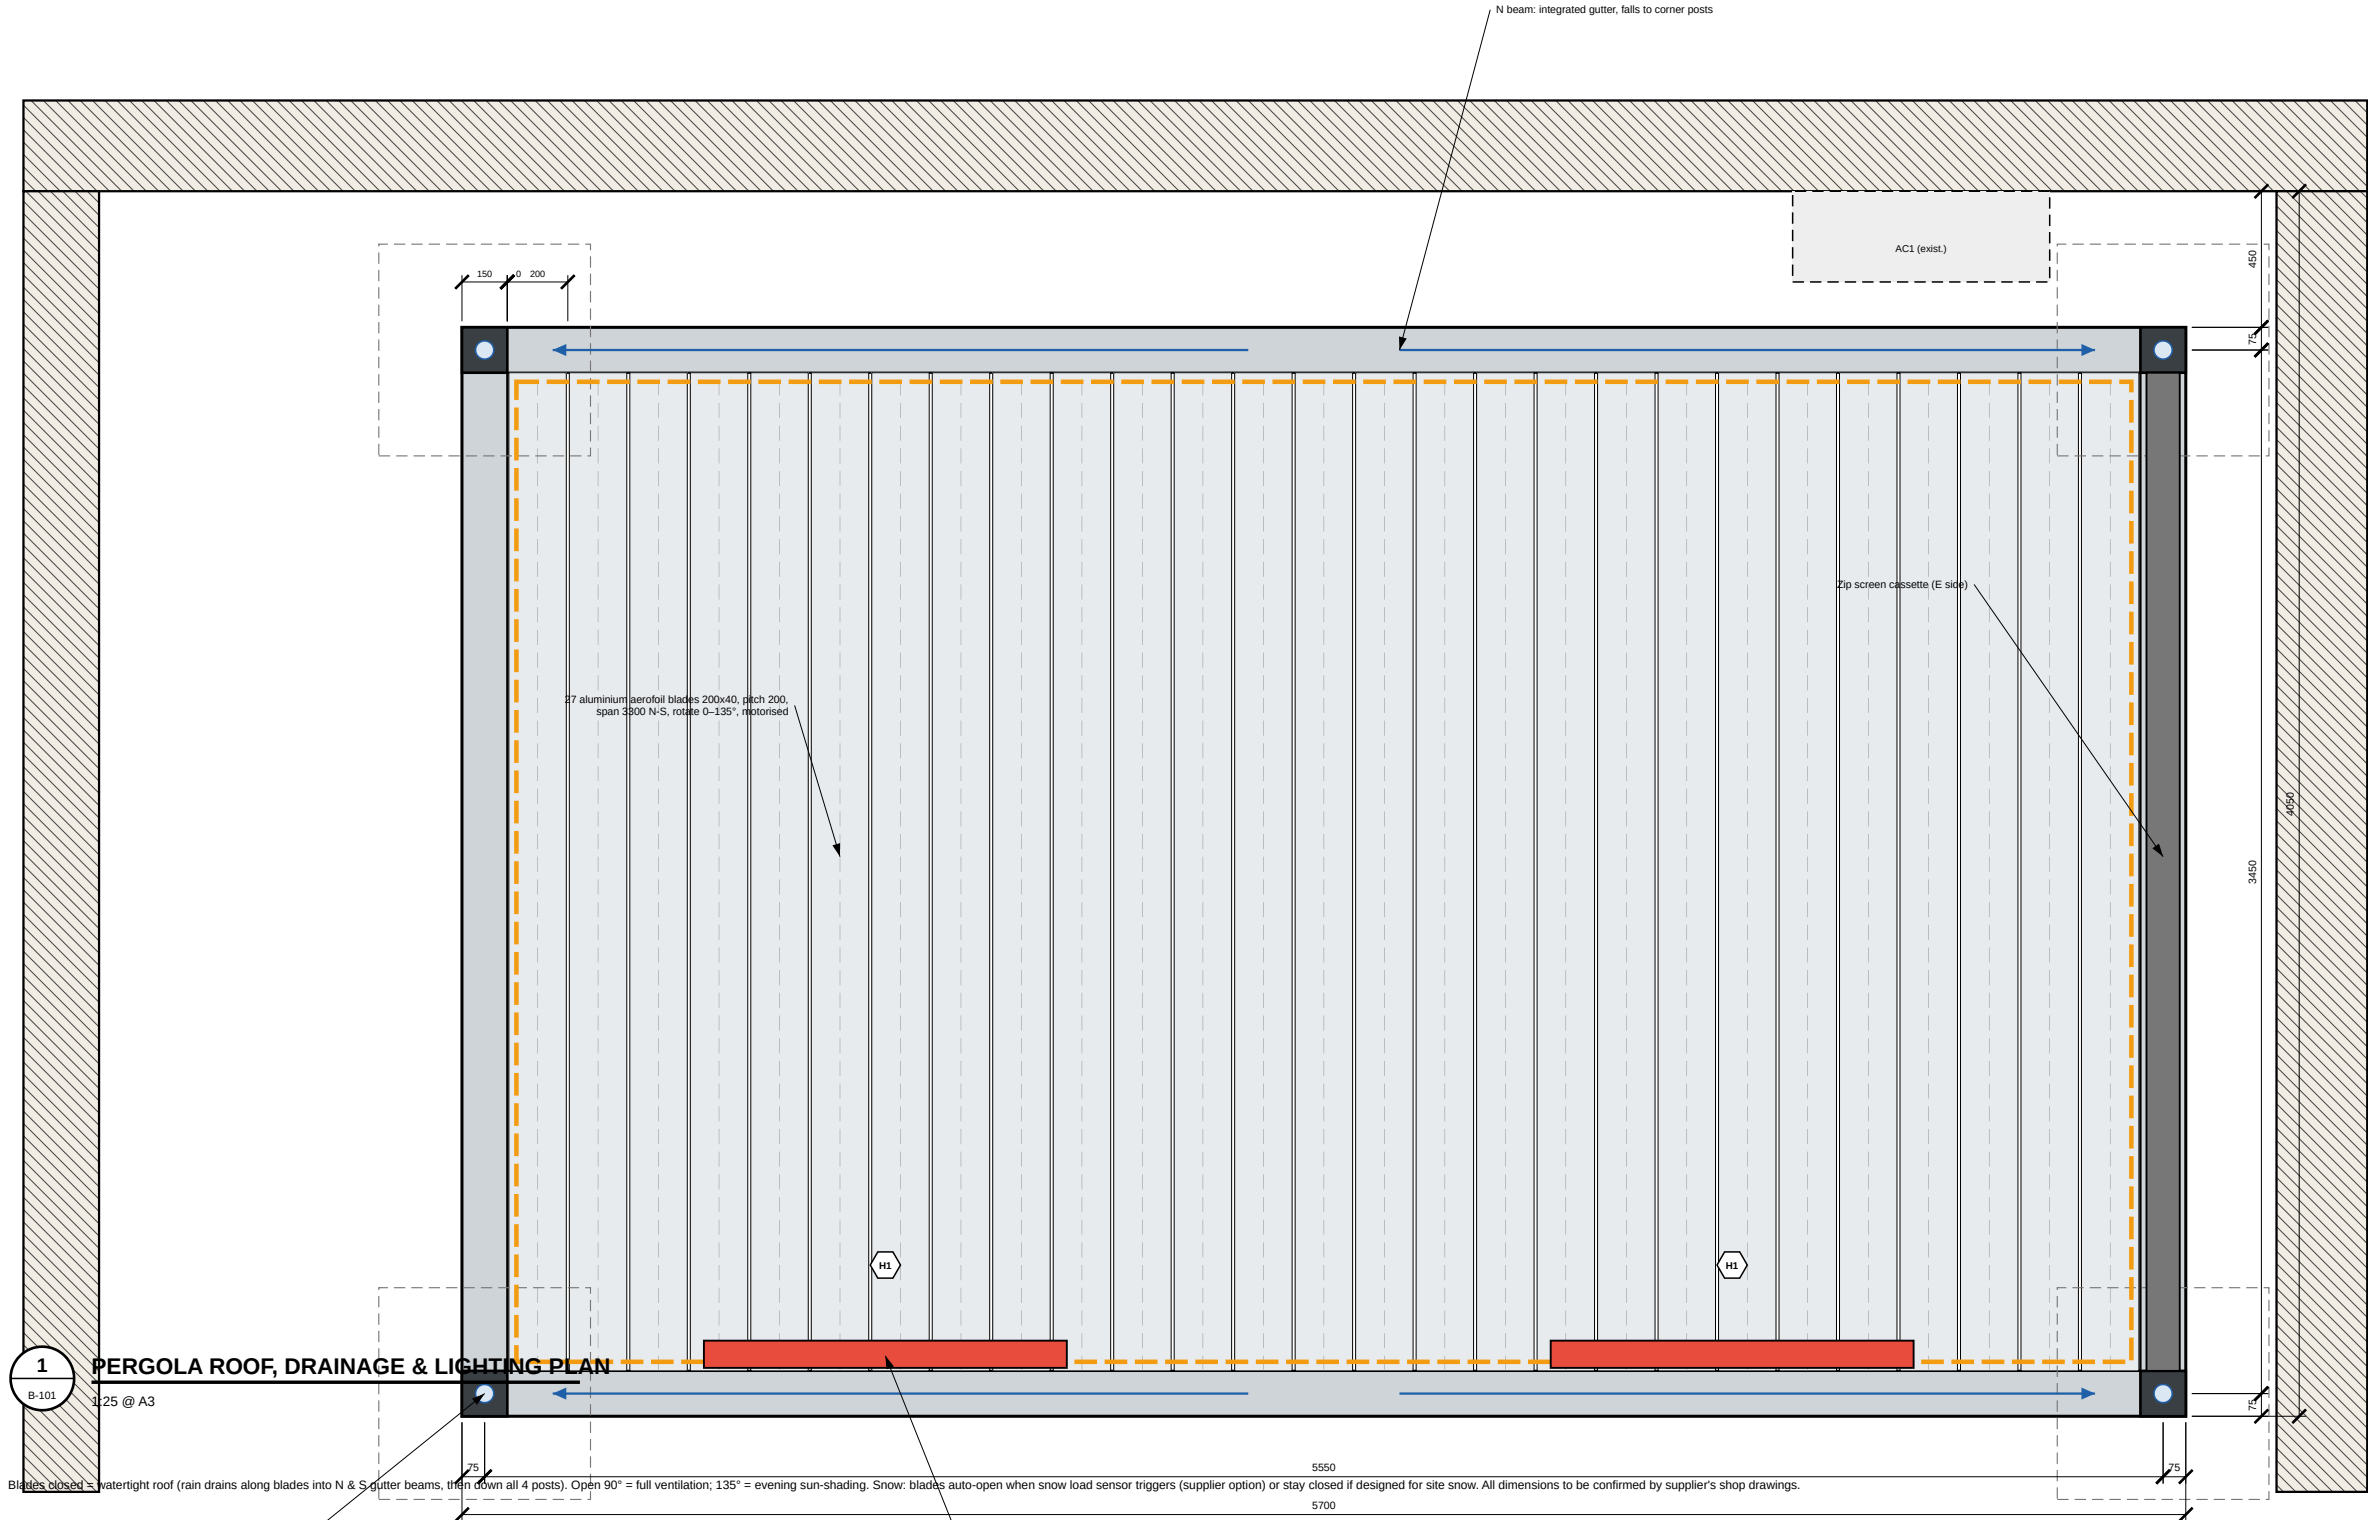

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction


DRAWING TITLE

Proposal B — elevation A (looking north)


SCALE @ A3	DATE
1:25	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

B-200 C01

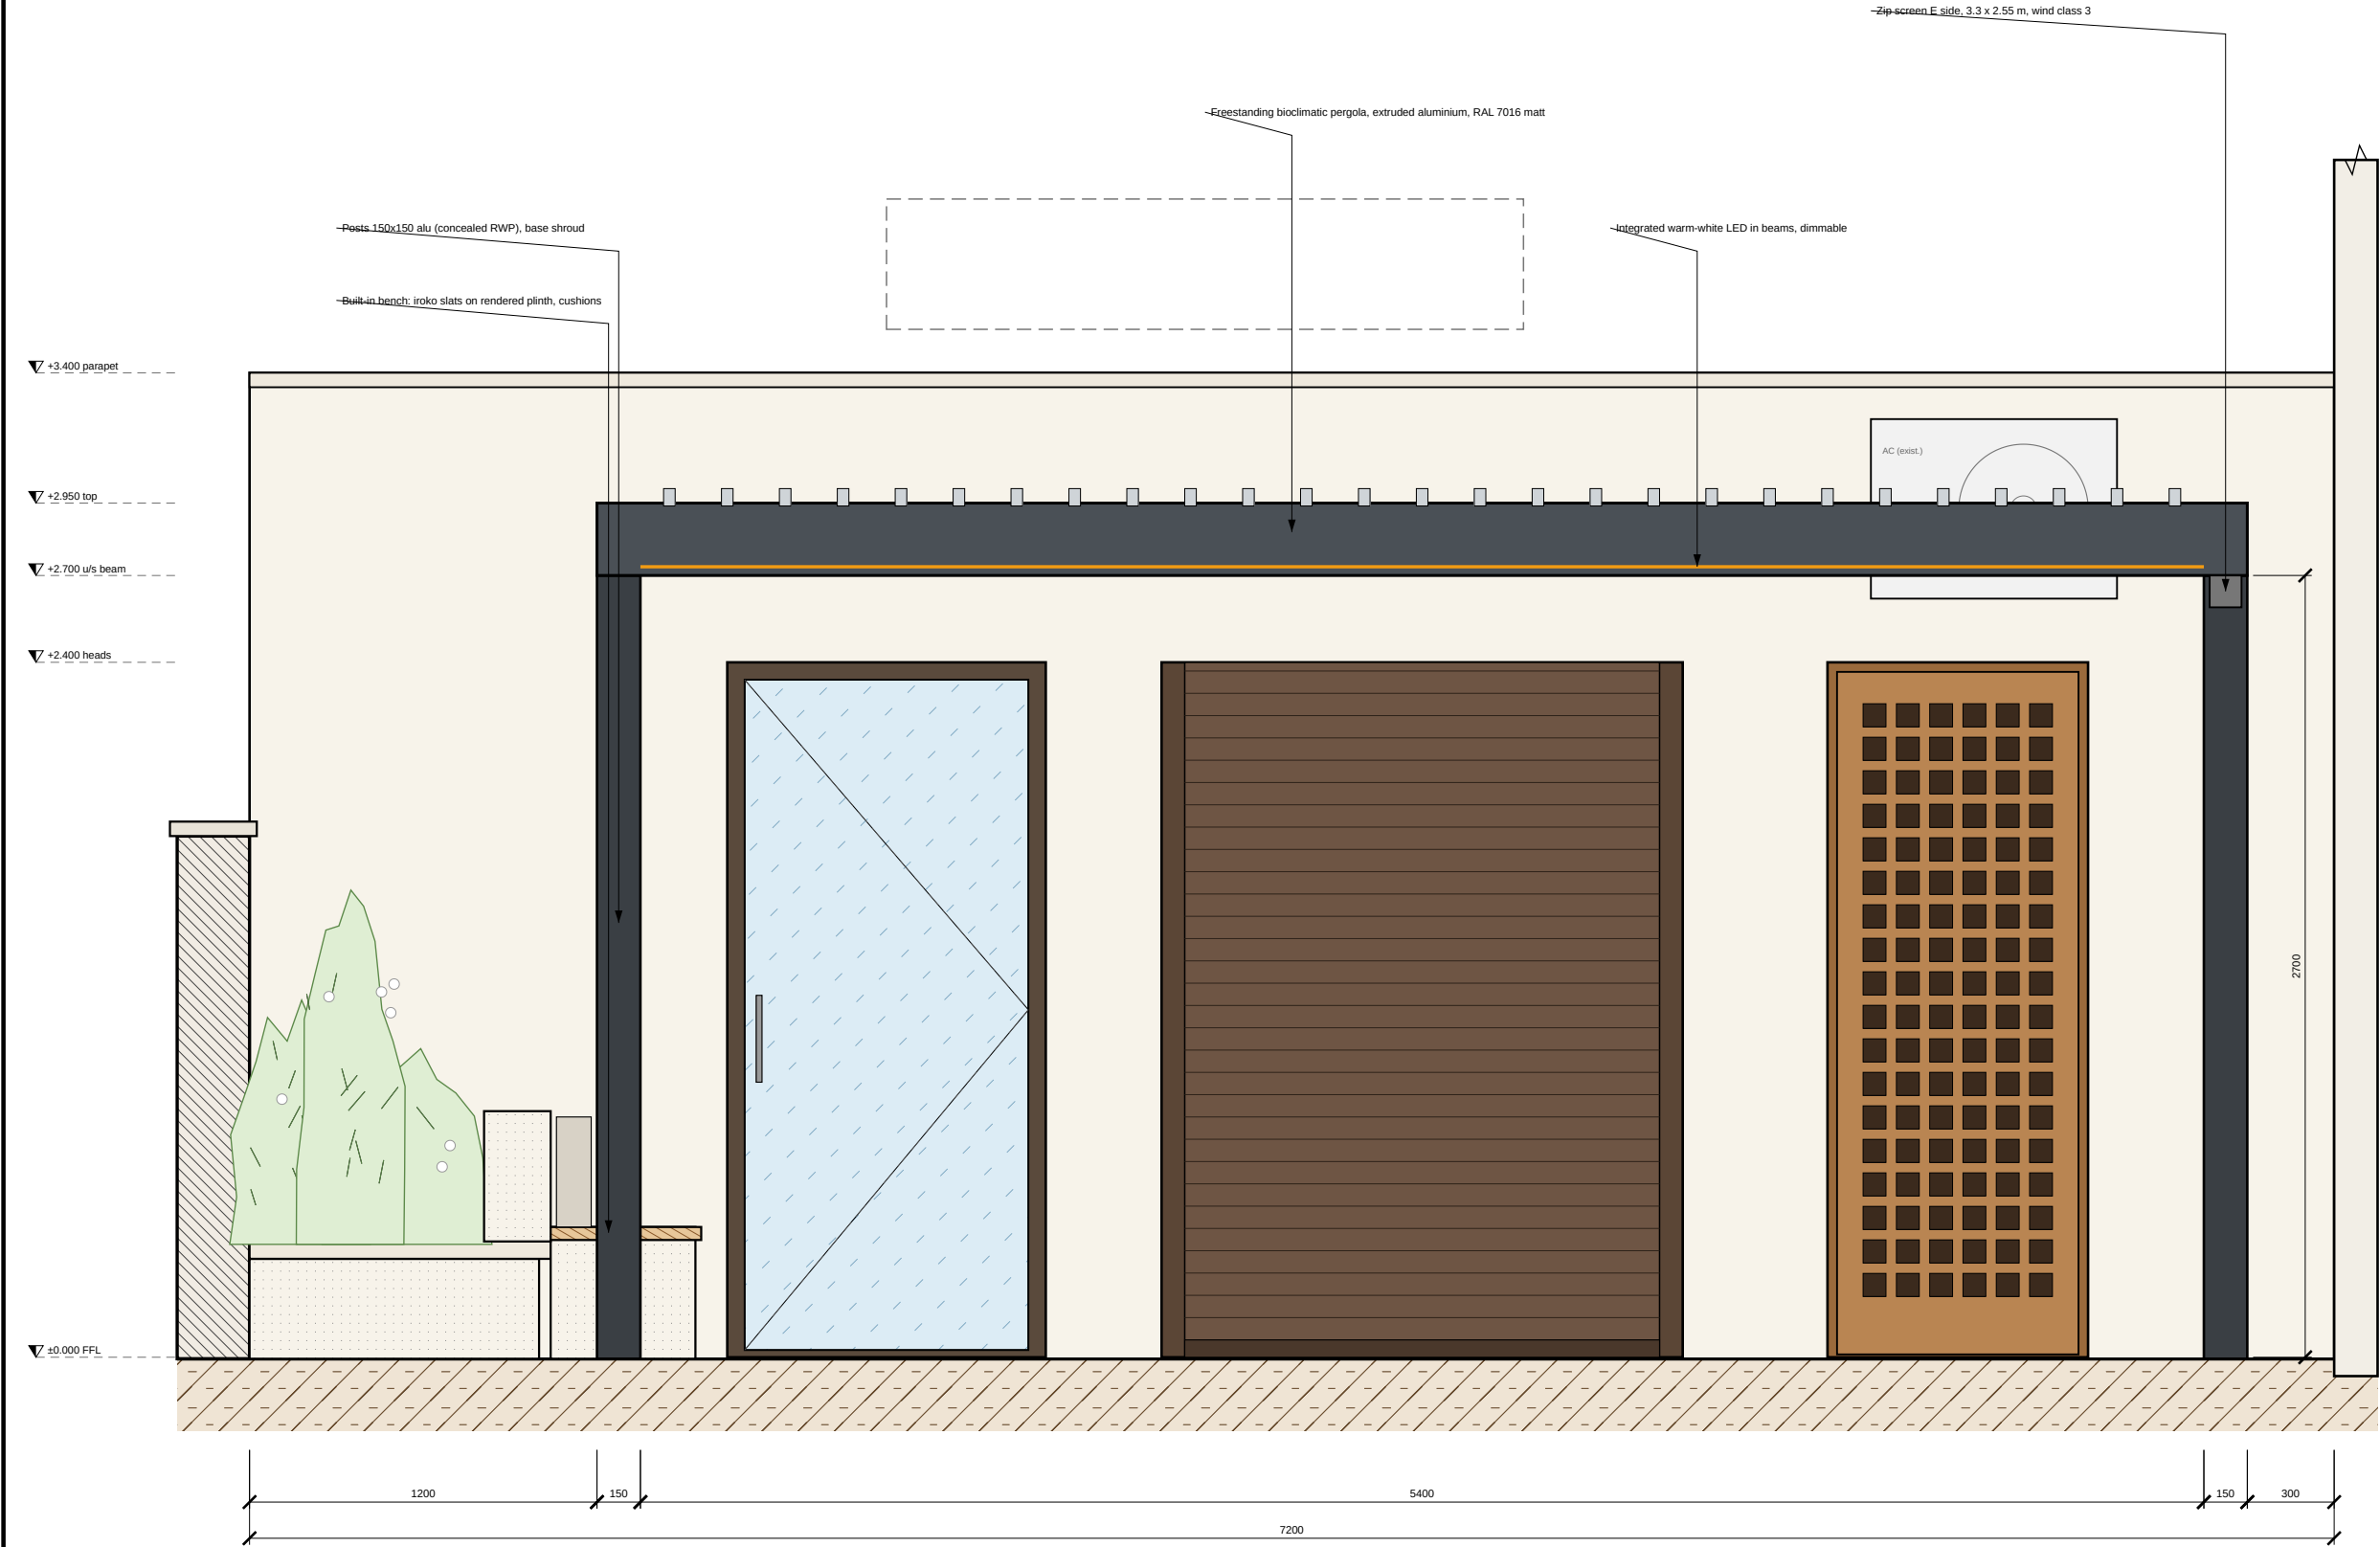

1 ELEVATION A — PERGOLA & FAÇADE (looking north)
B-200 1:25 @ A3



COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)


DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE
Proposal B — section B-B (E-W at Y = -2200)

SCALE @ A3 1:25	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL


DRAWING No. REV

B-300 C01

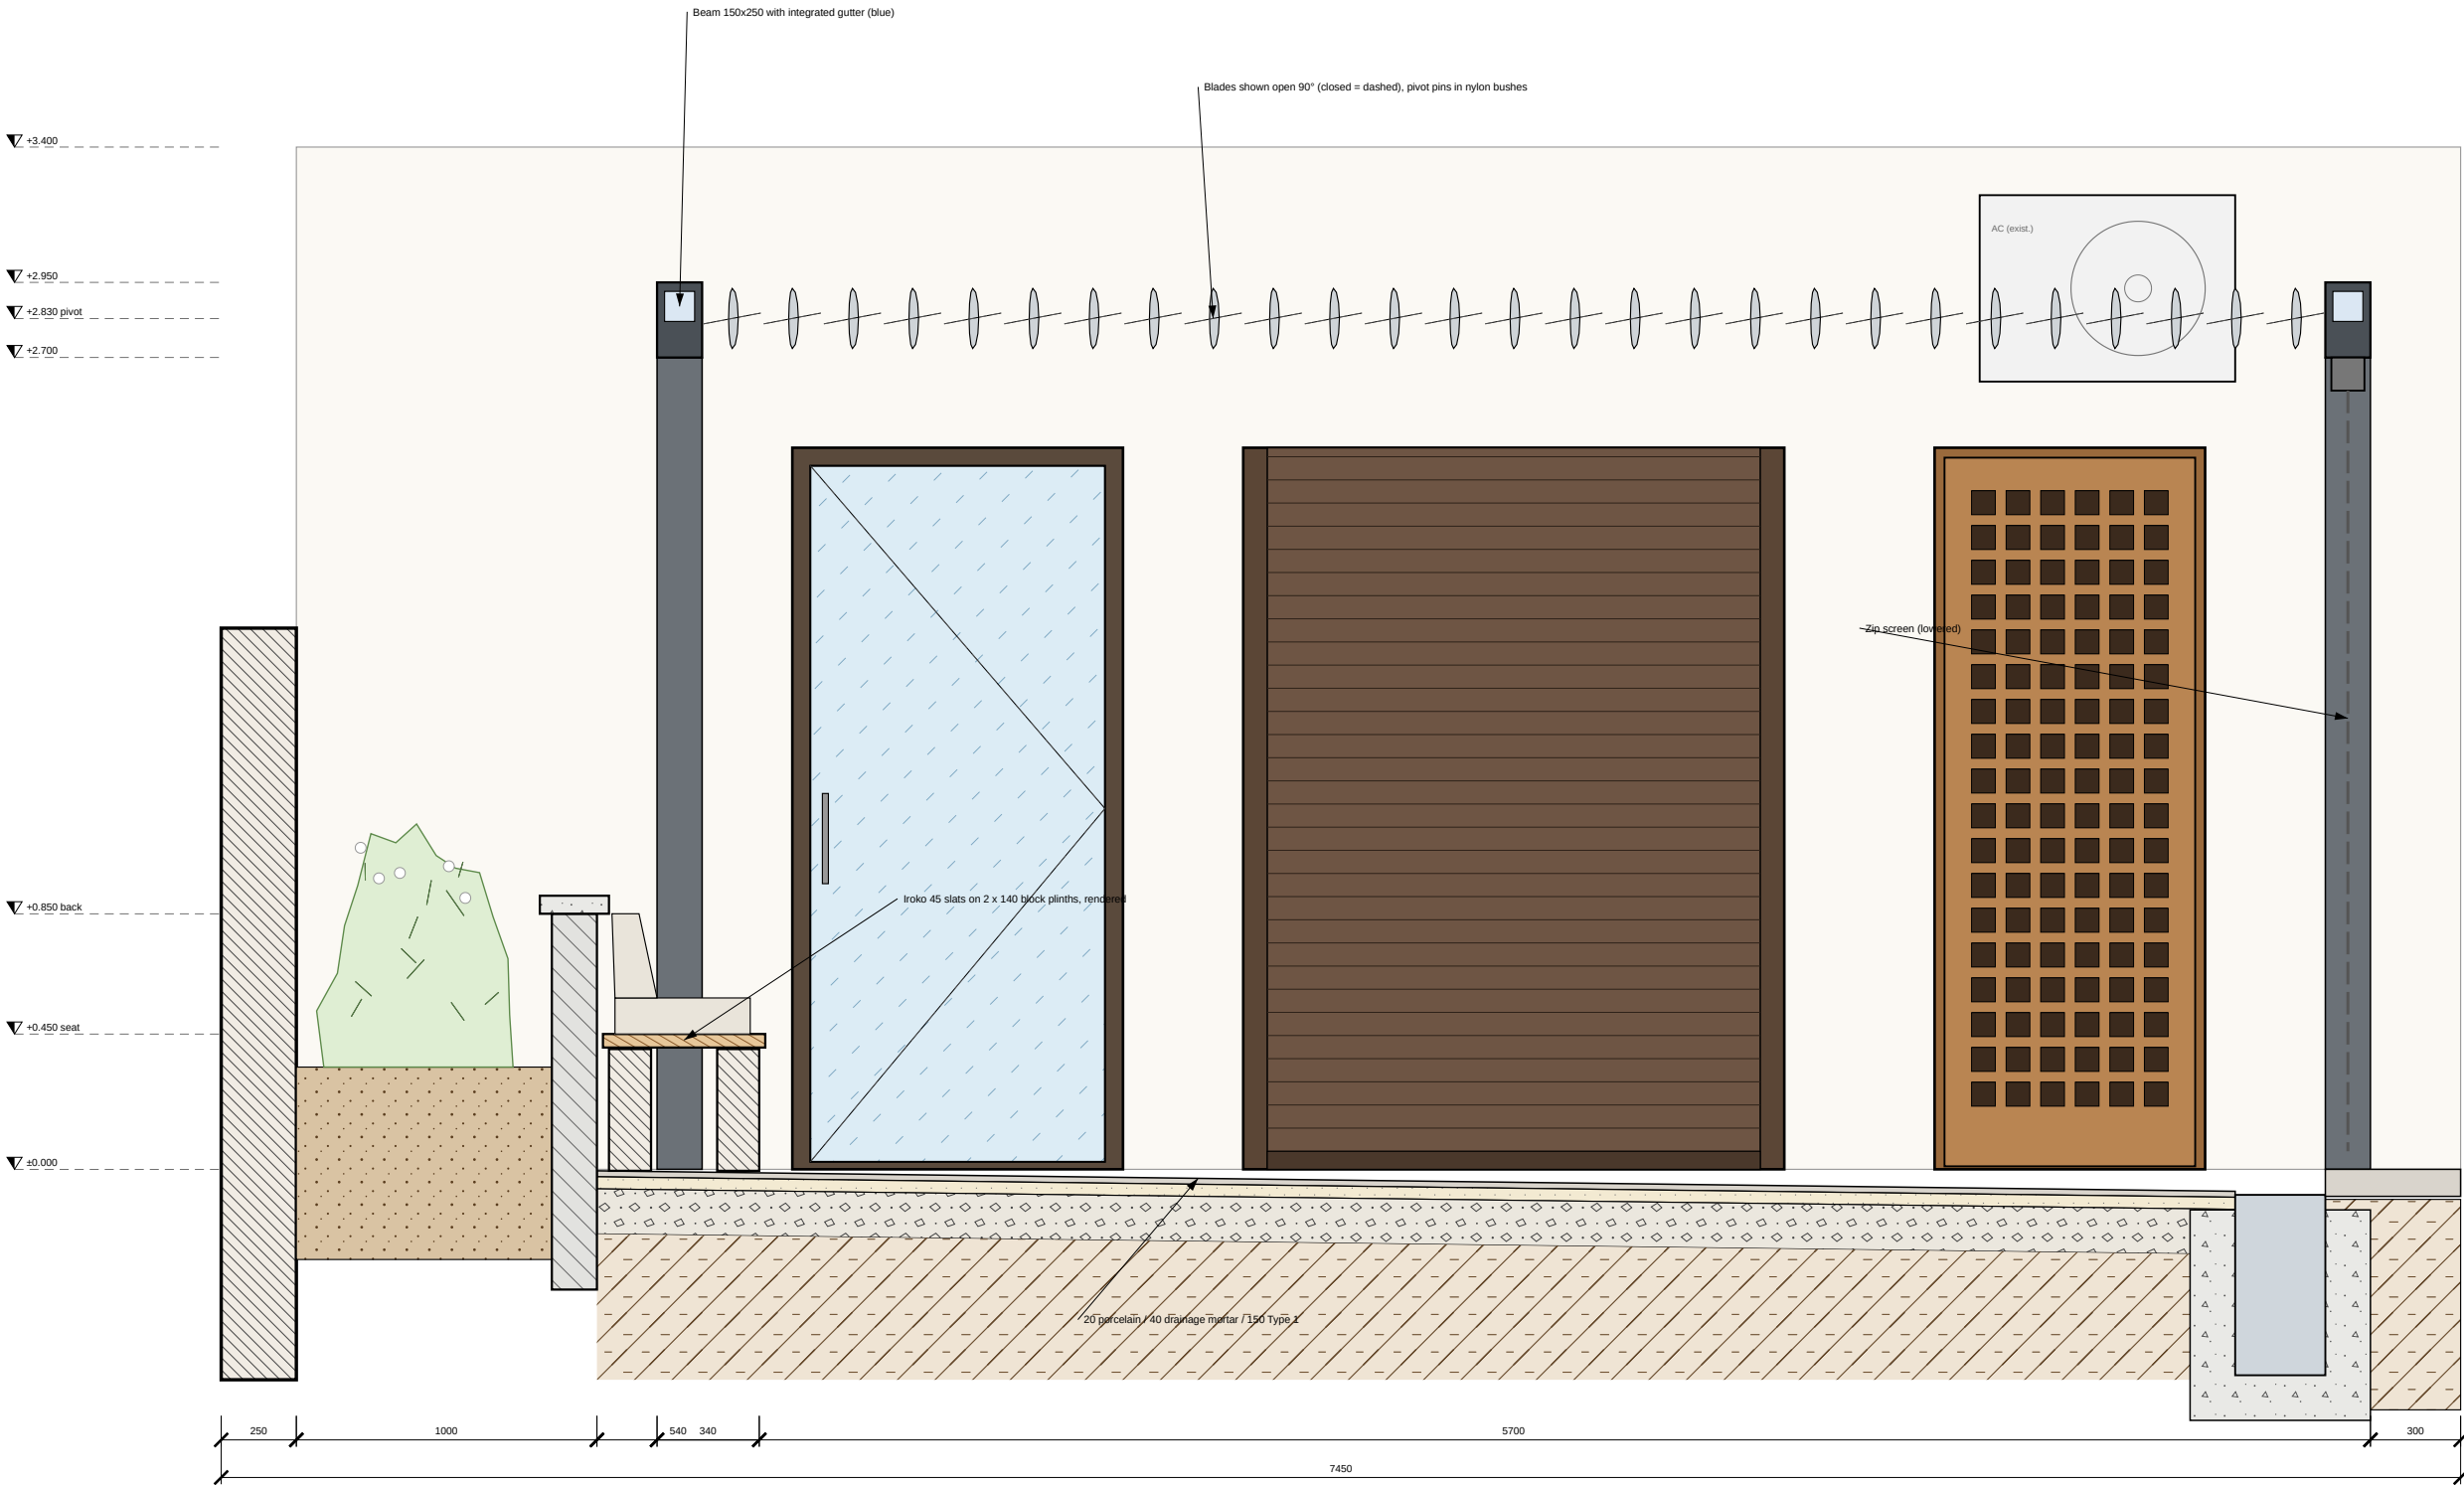


1 SECTION B-B
B-300 1:25 @ A3 through bench, pergola & gully G1, looking north

DB1 POST BASE — 1:10

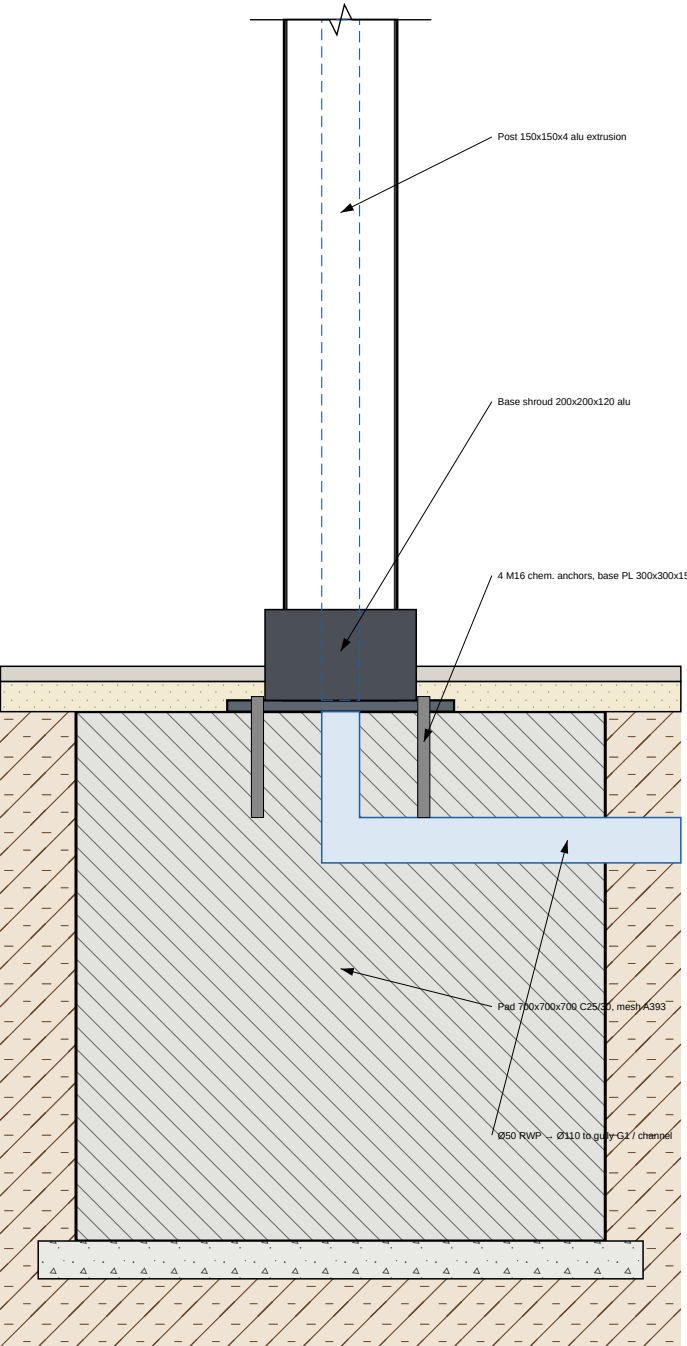

DB2 BEAM, GUTTER & BLADE — 1:5

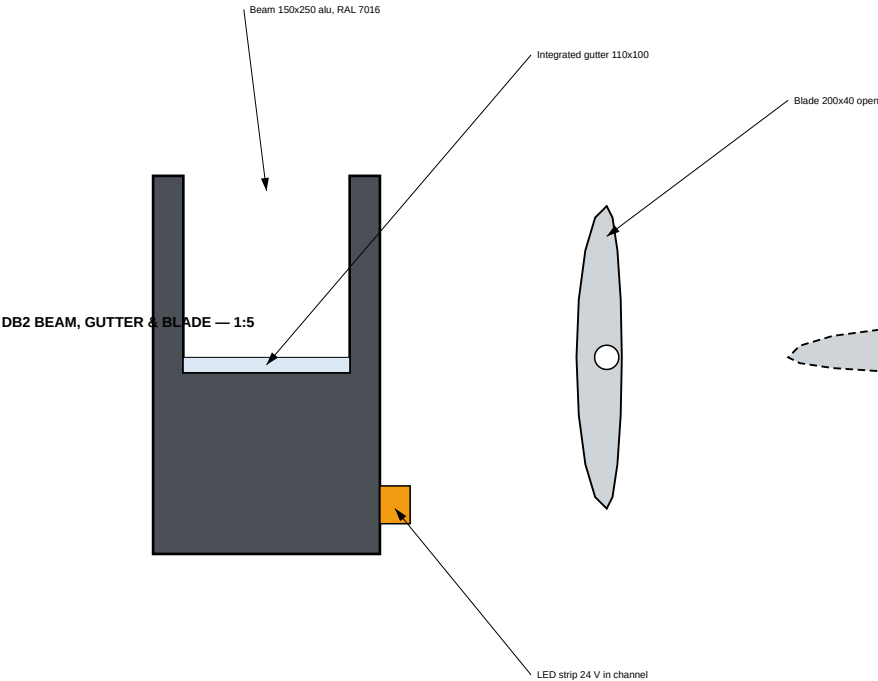

SYSTEM SPEC (performance)


- Proprietary freestanding bioclimatic pergola (e.g. Renson Algarve / Biossun / Brustor or equal), design & performance certified by supplier to EN 1991-1-3/-1-4 for site snow & wind; CE marked.
- Extruded aluminium 6063-T6, powder coat RAL 7016 Qualicoat cl. 2.
- Blades: aerofoil 200 mm, rotation 0–135°, watertight when closed (rain-sensor auto-close).
- Drive: 24 V linear actuator, rain + wind sensors, remote / app; manual crank override.
- Drainage: blades → integrated gutters → 4 posts → Ø110 to gullies.
- Lighting: perimeter LED 2700 K dimmable; 2 x 2 kW IR heaters on S beam.
- Zip screen: E side, PVC-free screen fabric 5% openness, wind class 3 (e.g. Fixscreen).
- Foundations: pad sizes are indicative — confirm with supplier's reactions (uplift).

ADVANTAGES

- No load on existing façade (freestanding) — no structural survey of annex needed.
- Adjustable shade/vent, fully closable to rain; heaters extend use to winter evenings.

closed (rain sensor)

DB3 BUILT-IN BENCH — 1:10

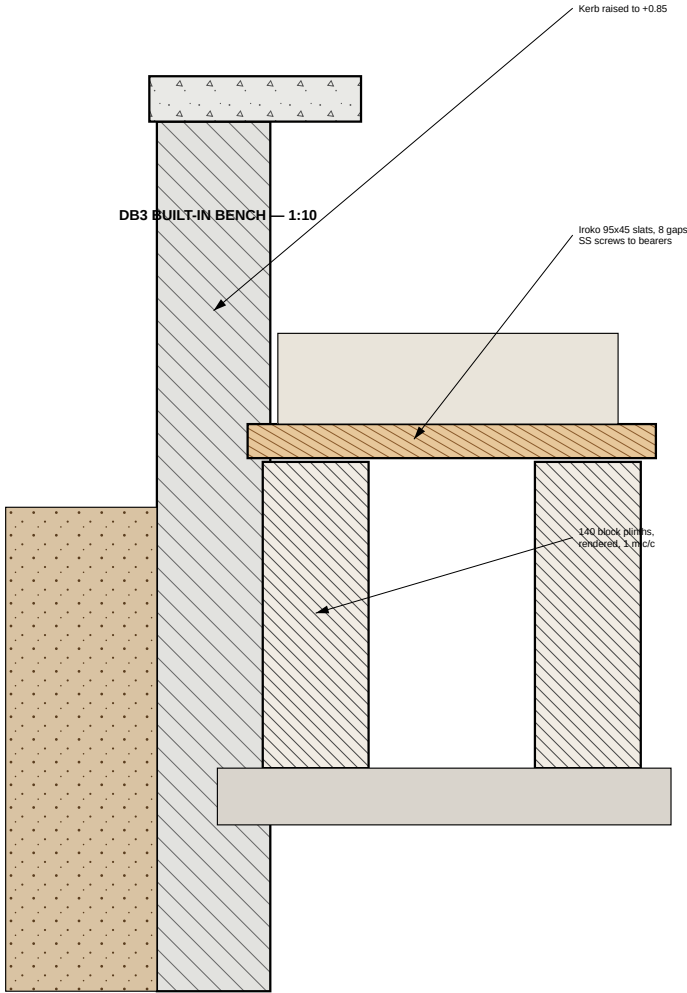

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)

Client: Owner / Client

Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE

Proposal B — details

SCALE @ A3 1:10 / 1:5	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No.

REV

B-500

C01

Item	Description	Unit	Qty	Rate
1	PRELIMINARIES			
1.1	Survey, set-up, protection, clean	item	1	
2	GROUNDWORKS & DRAINAGE			
2.1	Strip & excavate to formation	m³	13.0	
2.2	Pads 700x700x700 C25/30 + mesh	no	4	
2.3	Ø110 drains incl. post connections	m	28	
2.4	SD1 slot drain 5 m, gullies G1/G2	item	1	
3	PERGOLA SYSTEM (supplier)			
3.1	Bioclimatic pergola 5.7 x 3.6 m, 4 posts, motorised	no	1	
3.2	Integrated LED + dimmer	item	1	
3.3	IR heaters 2 kW IP65	no	2	
3.4	Zip screen E side 3.3 x 2.55	no	1	
3.5	Rain/wind sensors, app control	item	1	
4	PAVING			

Pergola system price to be obtained from 2-3 approved suppliers including foundations design; all other items measured from drawings.

Item	Description	Unit	Qty	Rate
4.1	Type 1 sub-base 150	m²	52.1	
4.2	20 mm porcelain 600x600 R11 on 40 drainage mortar + primer	m²	52.1	
5	PLANTER & BENCH			
5.1	Planter (as Design A A-302) incl. planting & drip	m	8.4	
5.2	Kerb raised to +0.85 along bench	m	3.2	
5.3	Bench plinths + iroko seat 500 deep	m	3.2	
5.4	Outdoor cushions (FF&E allowance)	item	1	
6	ELECTRICAL			
6.1	Dedicated 16 A RCBO circuit for pergola + heaters 20 A	item	1	
6.2	Uplights UL1-6, sockets SO1-2 IP66	item	1	
7	FINISHES			
7.1	Facade & wall repair/repaint	m²	40	
8	CONTINGENCY	%	7.5	

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE

Proposal B — schedules & bill of quantities

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	QUANTITIES

DRAWING No. REV

B-600C01