


PROPOSAL B — BIOCLIMATIC LOUVRED PERGOLA LOUNGE

Freestanding motorised aluminium louvre roof over a lounge, built-in bench on the planter, large-format porcelain paving, zip screen & heaters.

AXONOMETRIC FROM SOUTH-EAST (east wall cut away at 1.0 m) — NTS

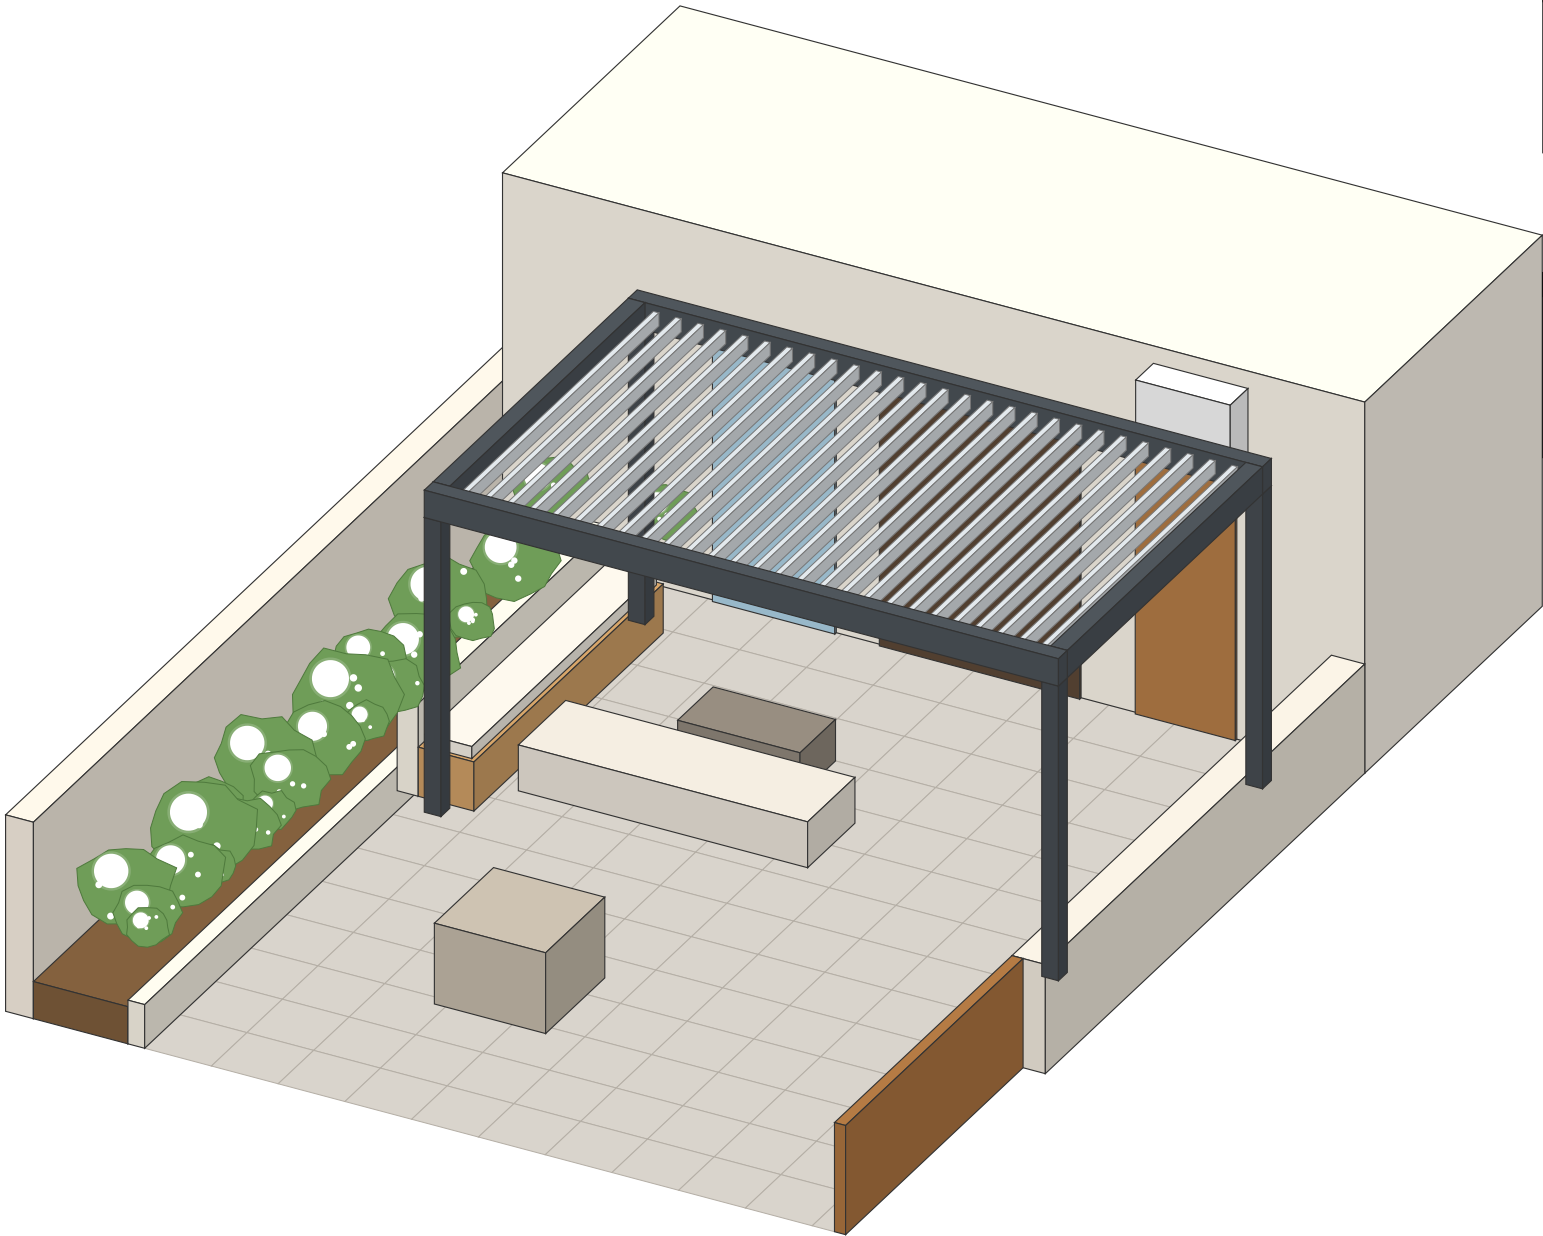

CONCEPT
A freestanding 5.7 x 3.6 m bioclimatic pergola replaces the fixed canopy: rotating blades give shade, ventilation or full rain-cover at the touch of a button. Because it stands on its own 4 posts it puts no load on the existing annex — the main structural risk of Design A disappears.

KEY FEATURES

- Louvres 0–135°, rain sensor auto-close, wind sensor open.
- Lounge zone with 3.2 m built-in iroko bench against the raised planter.
- 600x600 porcelain paving, warm greige, R11 anti-slip.
- Integrated dimmable LED, 2 IR heaters, east zip screen hides AC/wall.

DRAWING REGISTER

No.	Title
B-000	Cover, concept & register
B-100	General arrangement plan 1:50
B-101	Pergola roof & structure plan 1:25
B-200	Elevation A 1:25
B-300	Section B-B (E-W) 1:25
B-500	Details 1:10 / 1:5
B-600	Schedules & BOQ

COMPARISON WITH DESIGN A

Criterion	Design A	Prop. B
Roof	Fixed, membrane	Adjustable louvres
Load on façade	Yes (ledger)	None
Survey of annex	Required	Not required
Winter use	Medium	High (heaters)
Rain protection	Full	Full when closed
Cost class	€€	€€€
Lead time	4–6 wk	6–8 wk (system)
Maintenance	Oil timber	Wash, sensors

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

- Do not scale from this drawing. Use figured dimensions only.
- All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
- Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
- Read with all other architectural, structural & services drawings and the specification notes (A-001).
- Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
- Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE

Proposal B — cover, concept & drawing register

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

B-000 **C01**

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction


DRAWING TITLE

Proposal B — general arrangement plan

SCALE @ A3	DATE
1:50	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV


B-100 C01

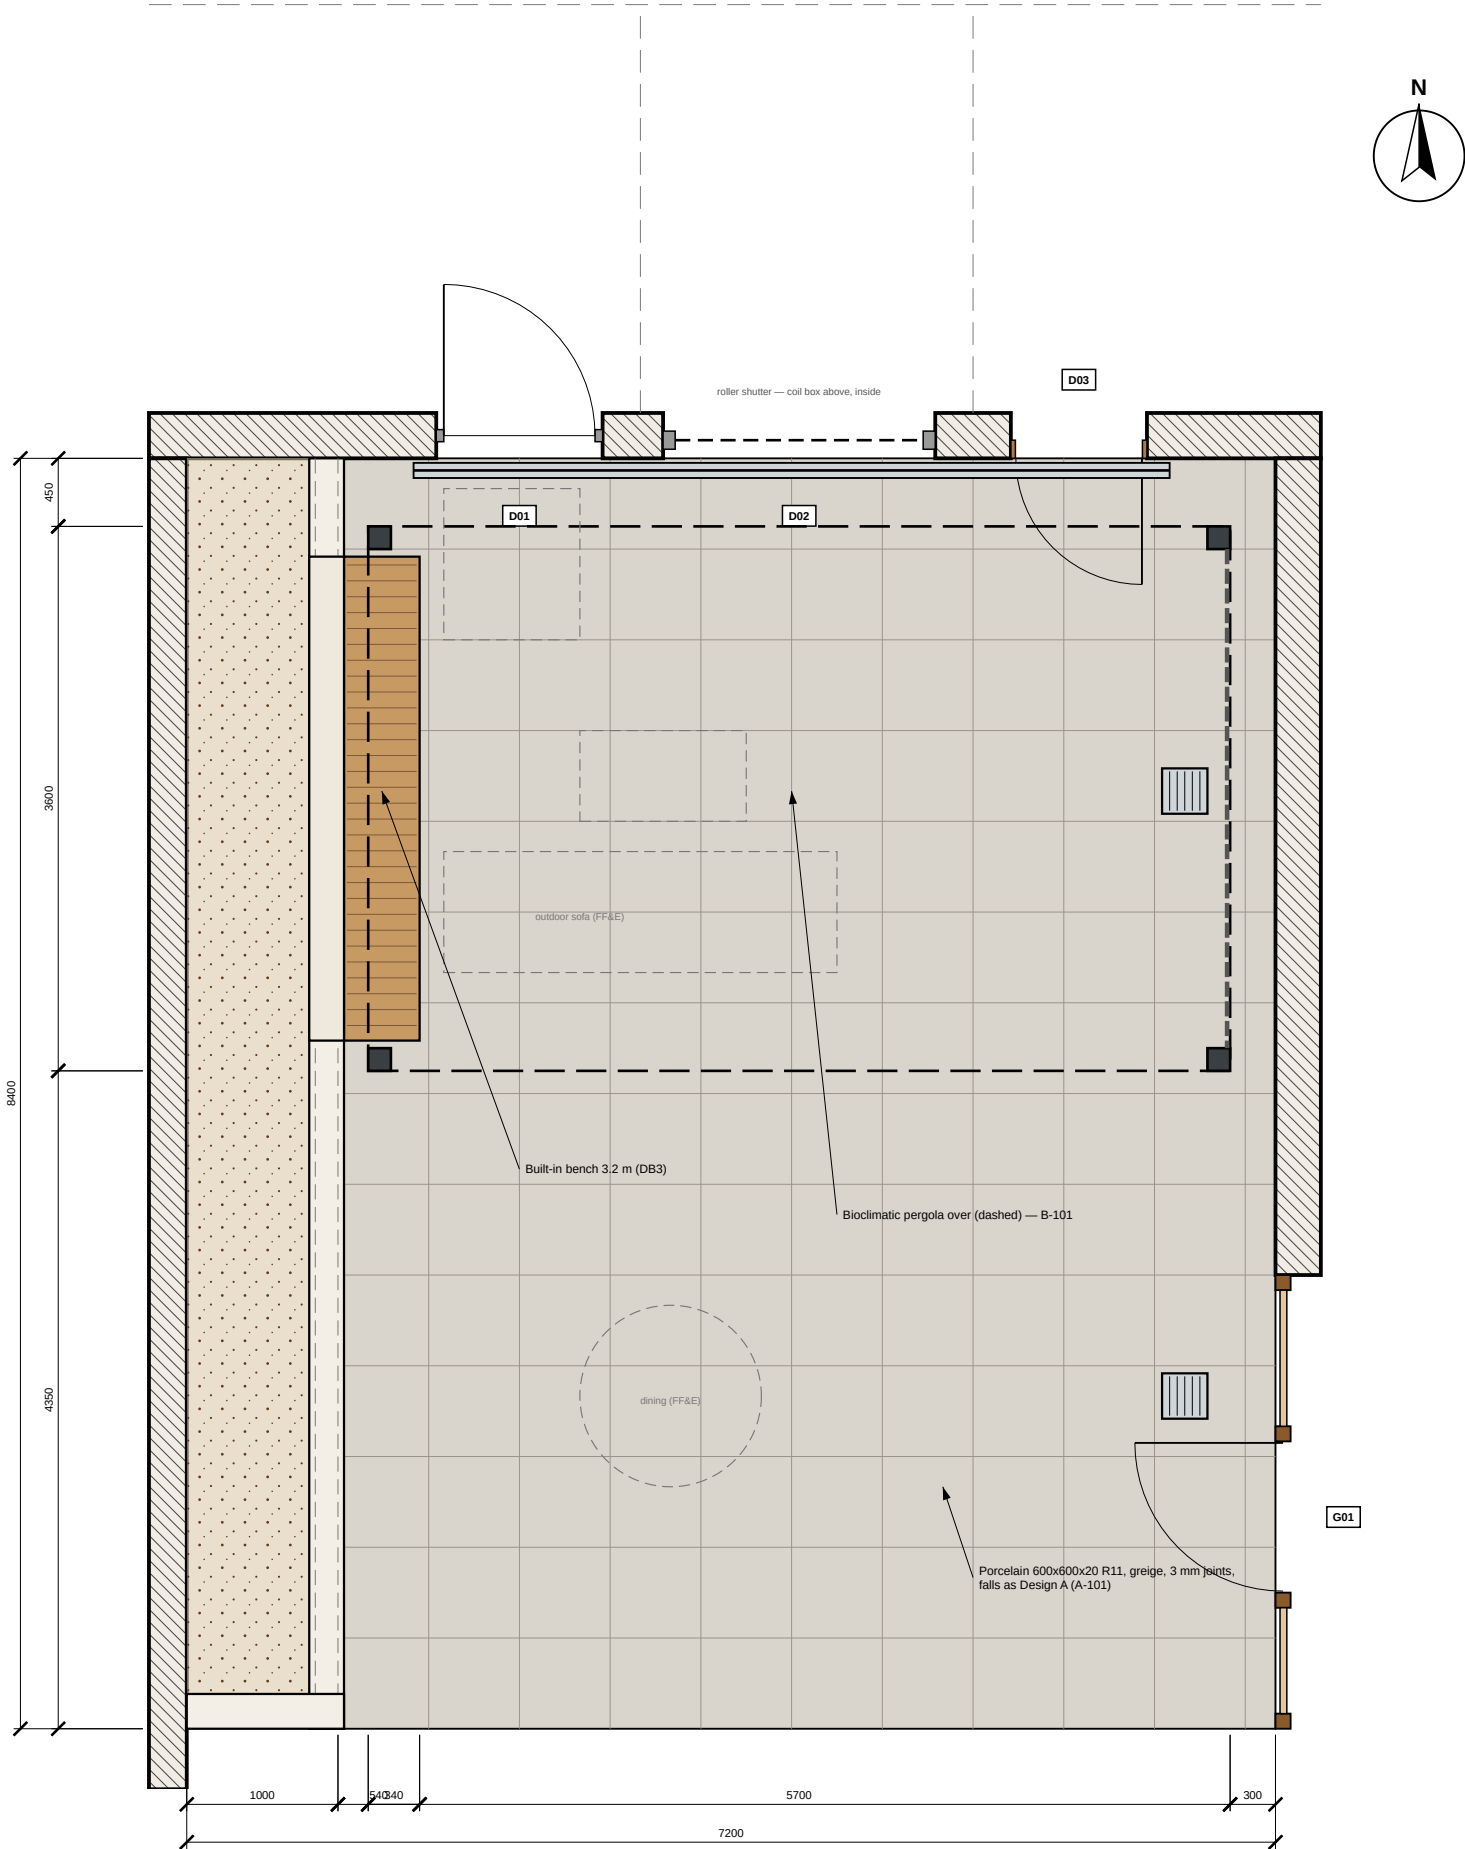

1 GENERAL ARRANGEMENT PLAN

B-100 1:50 @ A3

- NOTES
- Existing walls, doors D01–D03, planter, G01 screen & drainage as Design A unless noted.
 - Pergola is freestanding: 450 mm clear of façade (AC1 unit stays). Optional fabric gap-closer.
 - Post positions to be confirmed by supplier — keep clear of gullies G1/G2 and D03 swing.
 - Porcelain: R11, PEI V, frost resistant, 20 mm; joints 3 mm polymer jointing compound.
 - Planting as A-104; jasmine on SS wires on post faces optional.



COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction


DRAWING TITLE

Proposal B — pergola roof & structure plan

SCALE @ A3	DATE
1:25	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

B-101 C01

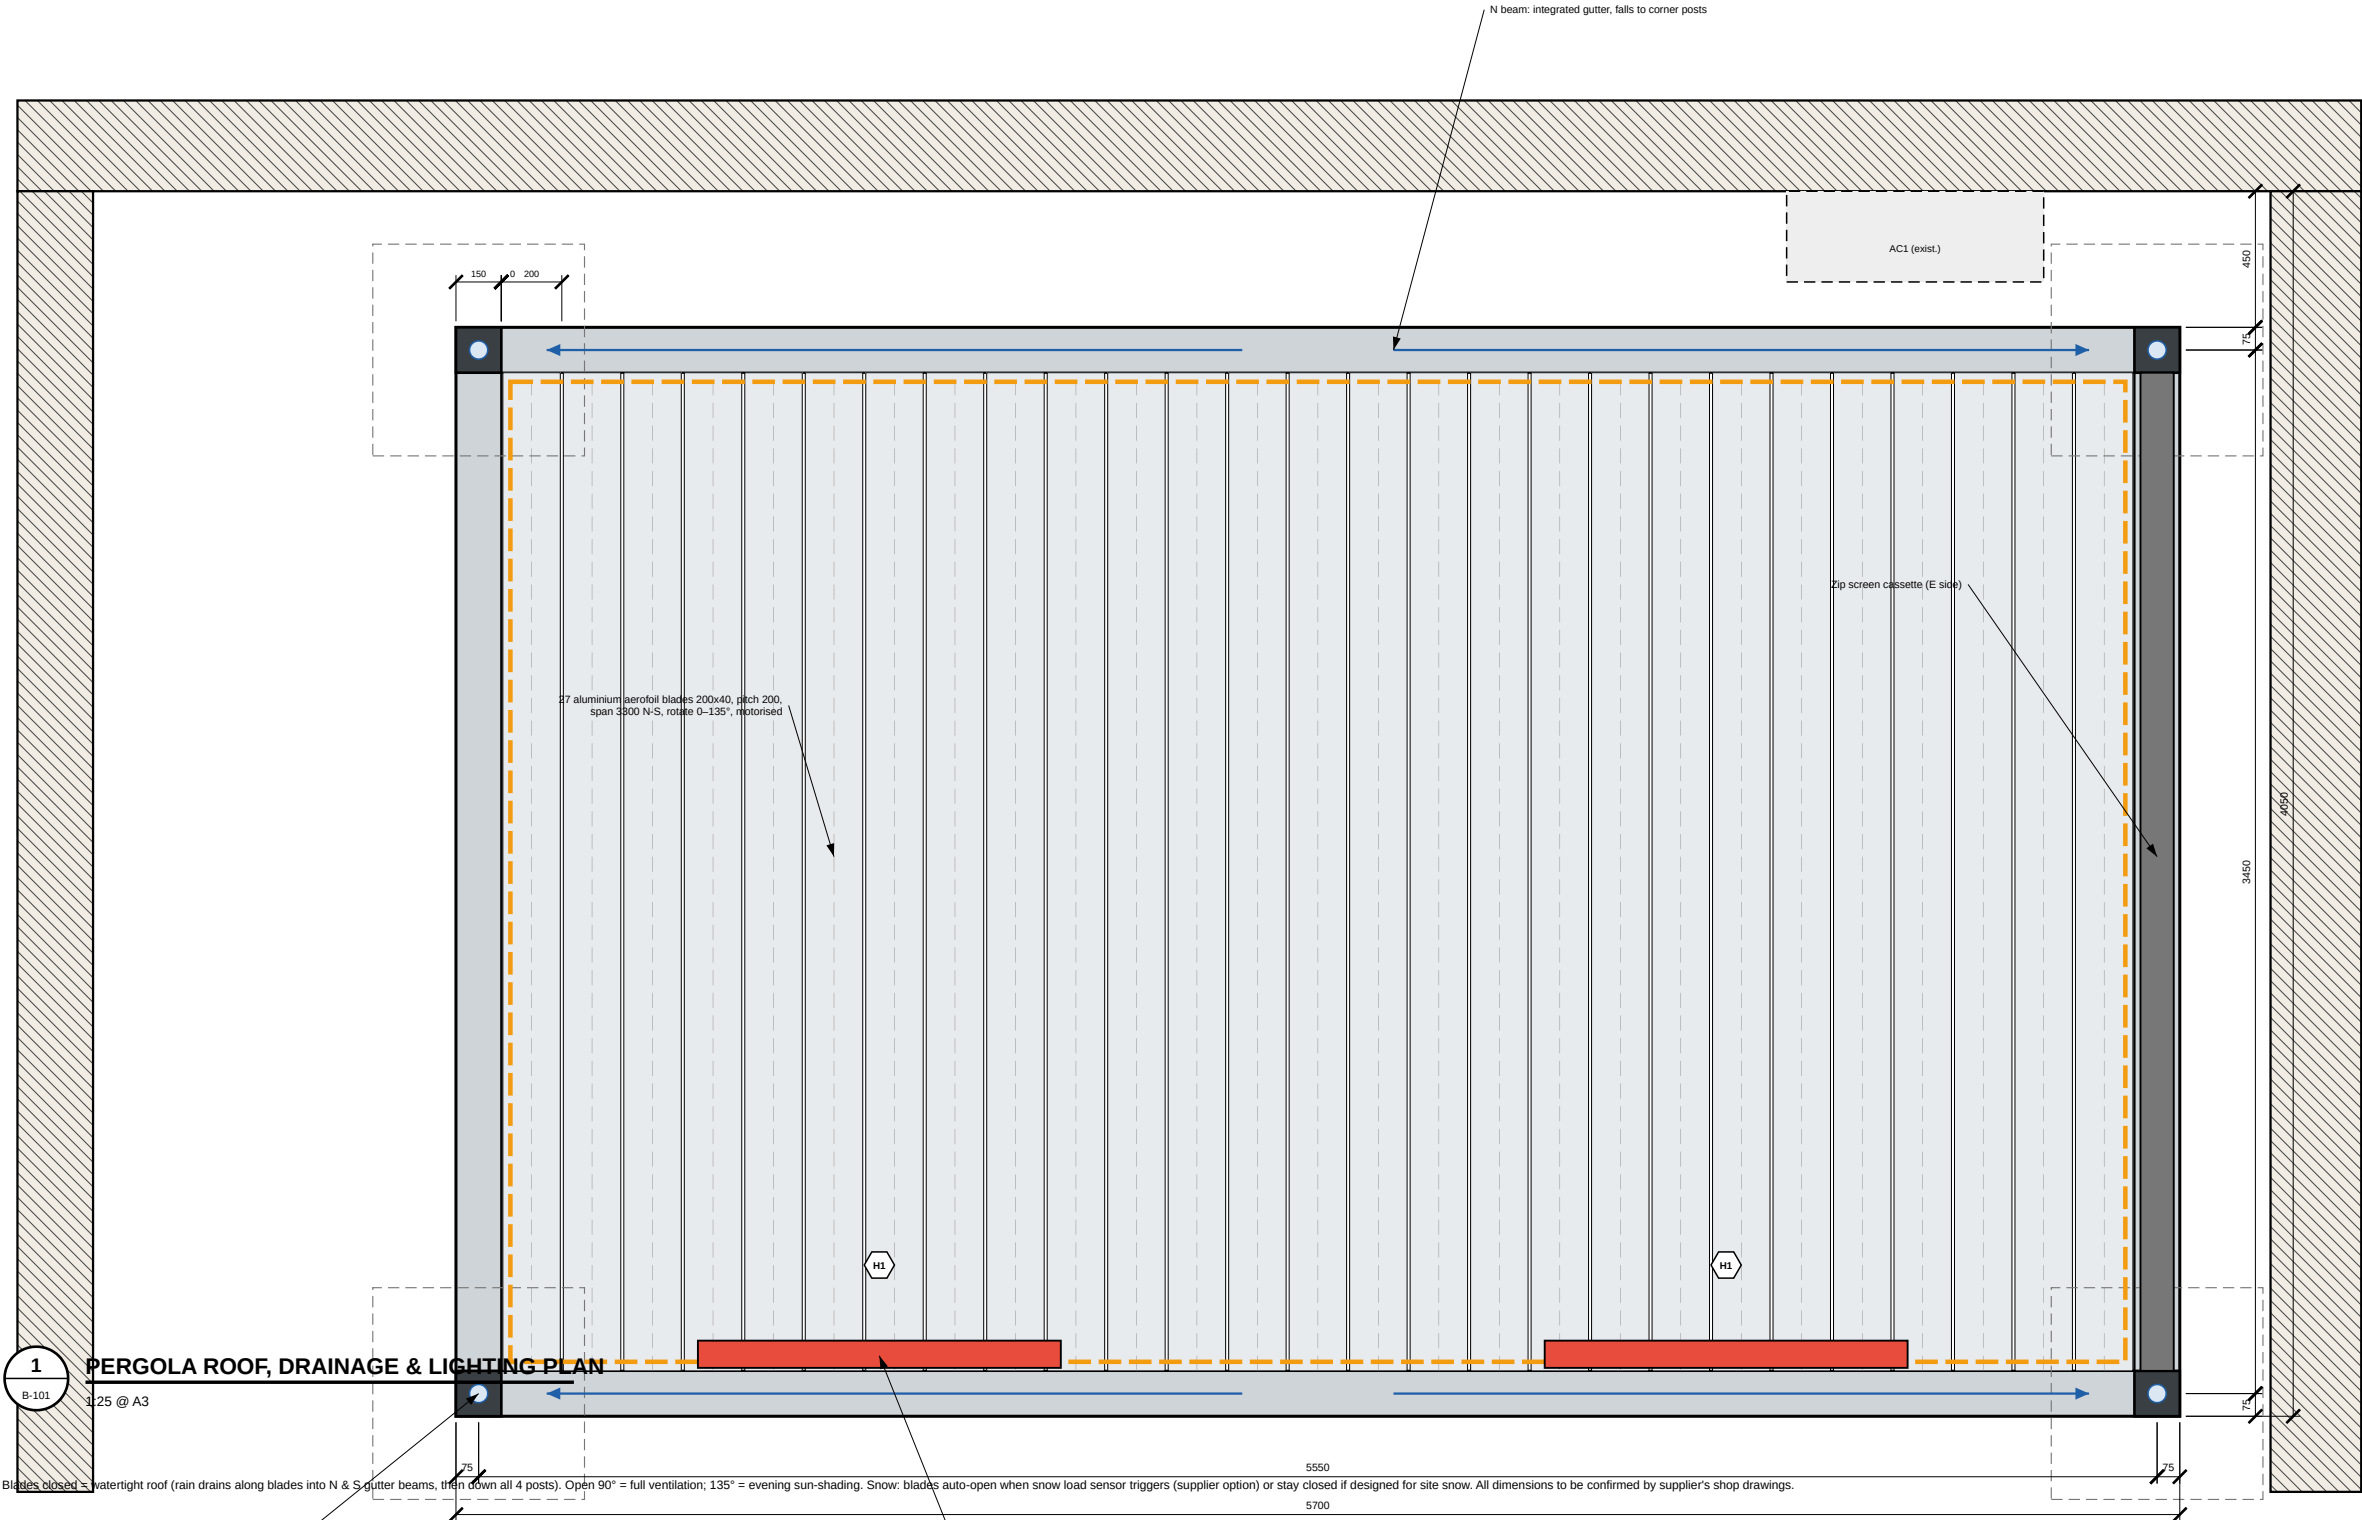

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction


DRAWING TITLE

Proposal B — elevation A (looking north)

SCALE @ A3	DATE
1:25	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL


DRAWING No. REV

B-200 C01

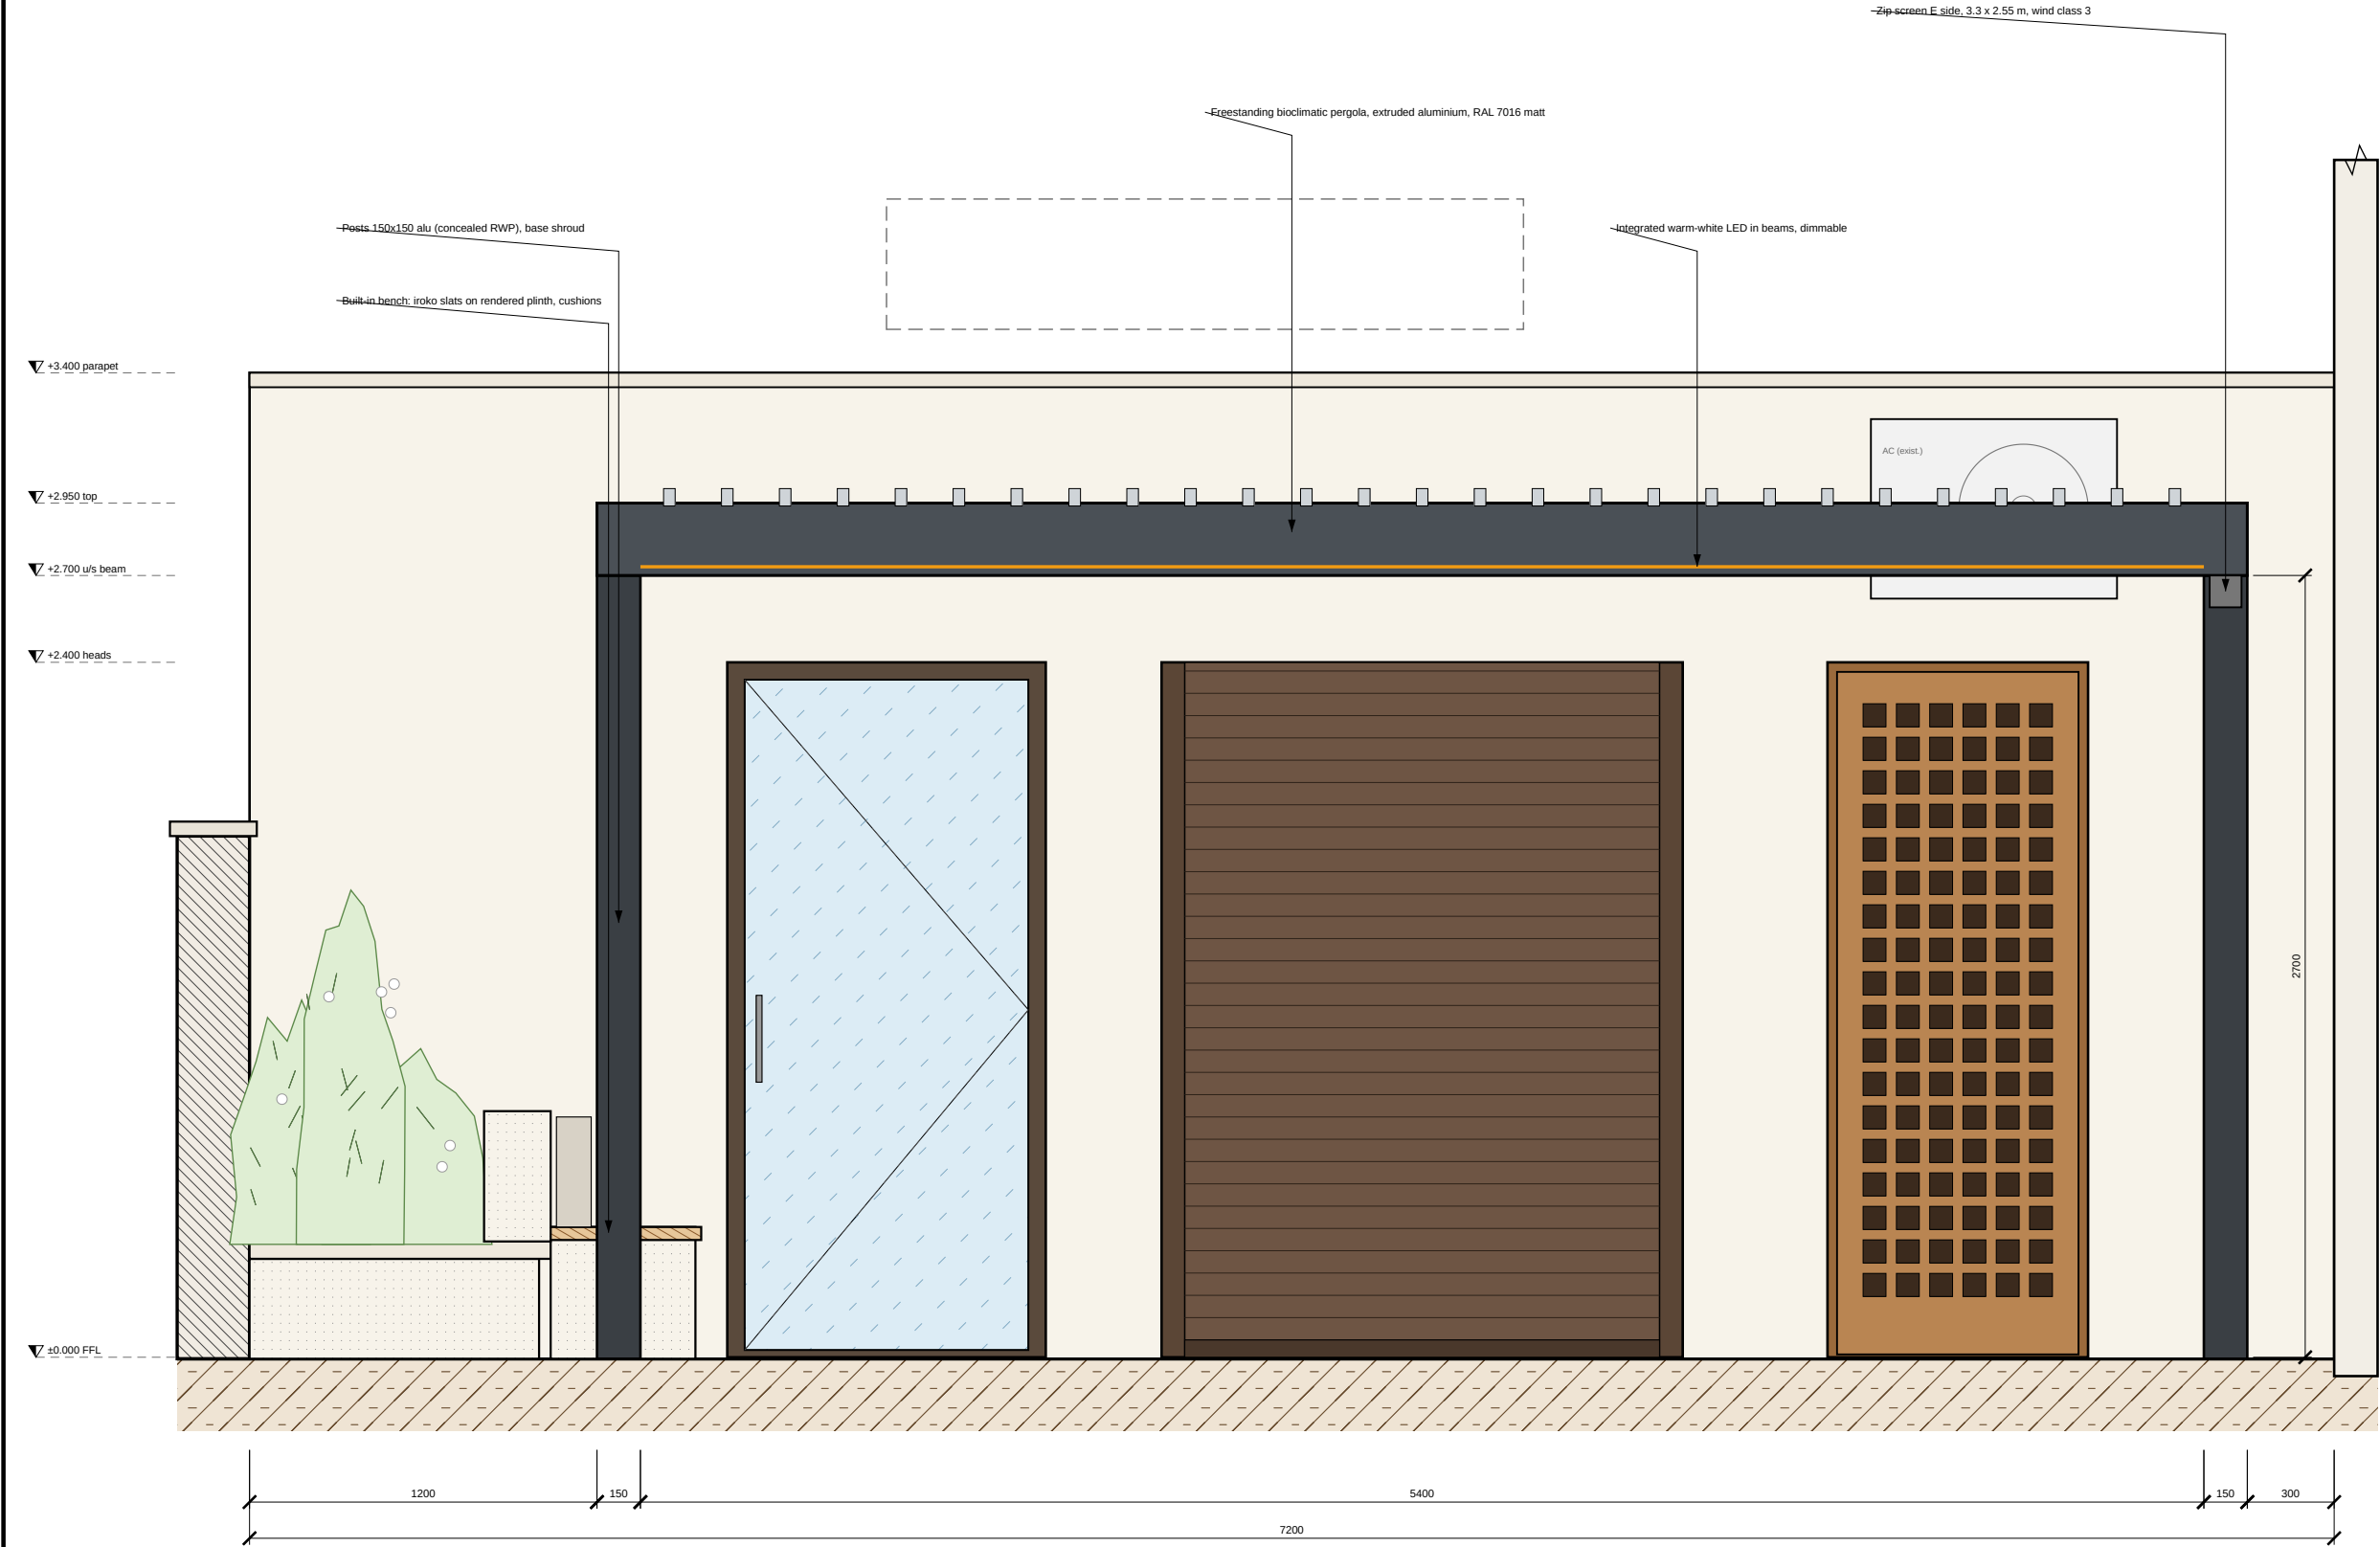

1 ELEVATION A — PERGOLA & FAÇADE (looking north)

B-200 1:25 @ A3



COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)


DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE
Proposal B — section B-B (E-W at Y = -2200)

SCALE @ A3 1:25	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. REV


B-300 C01

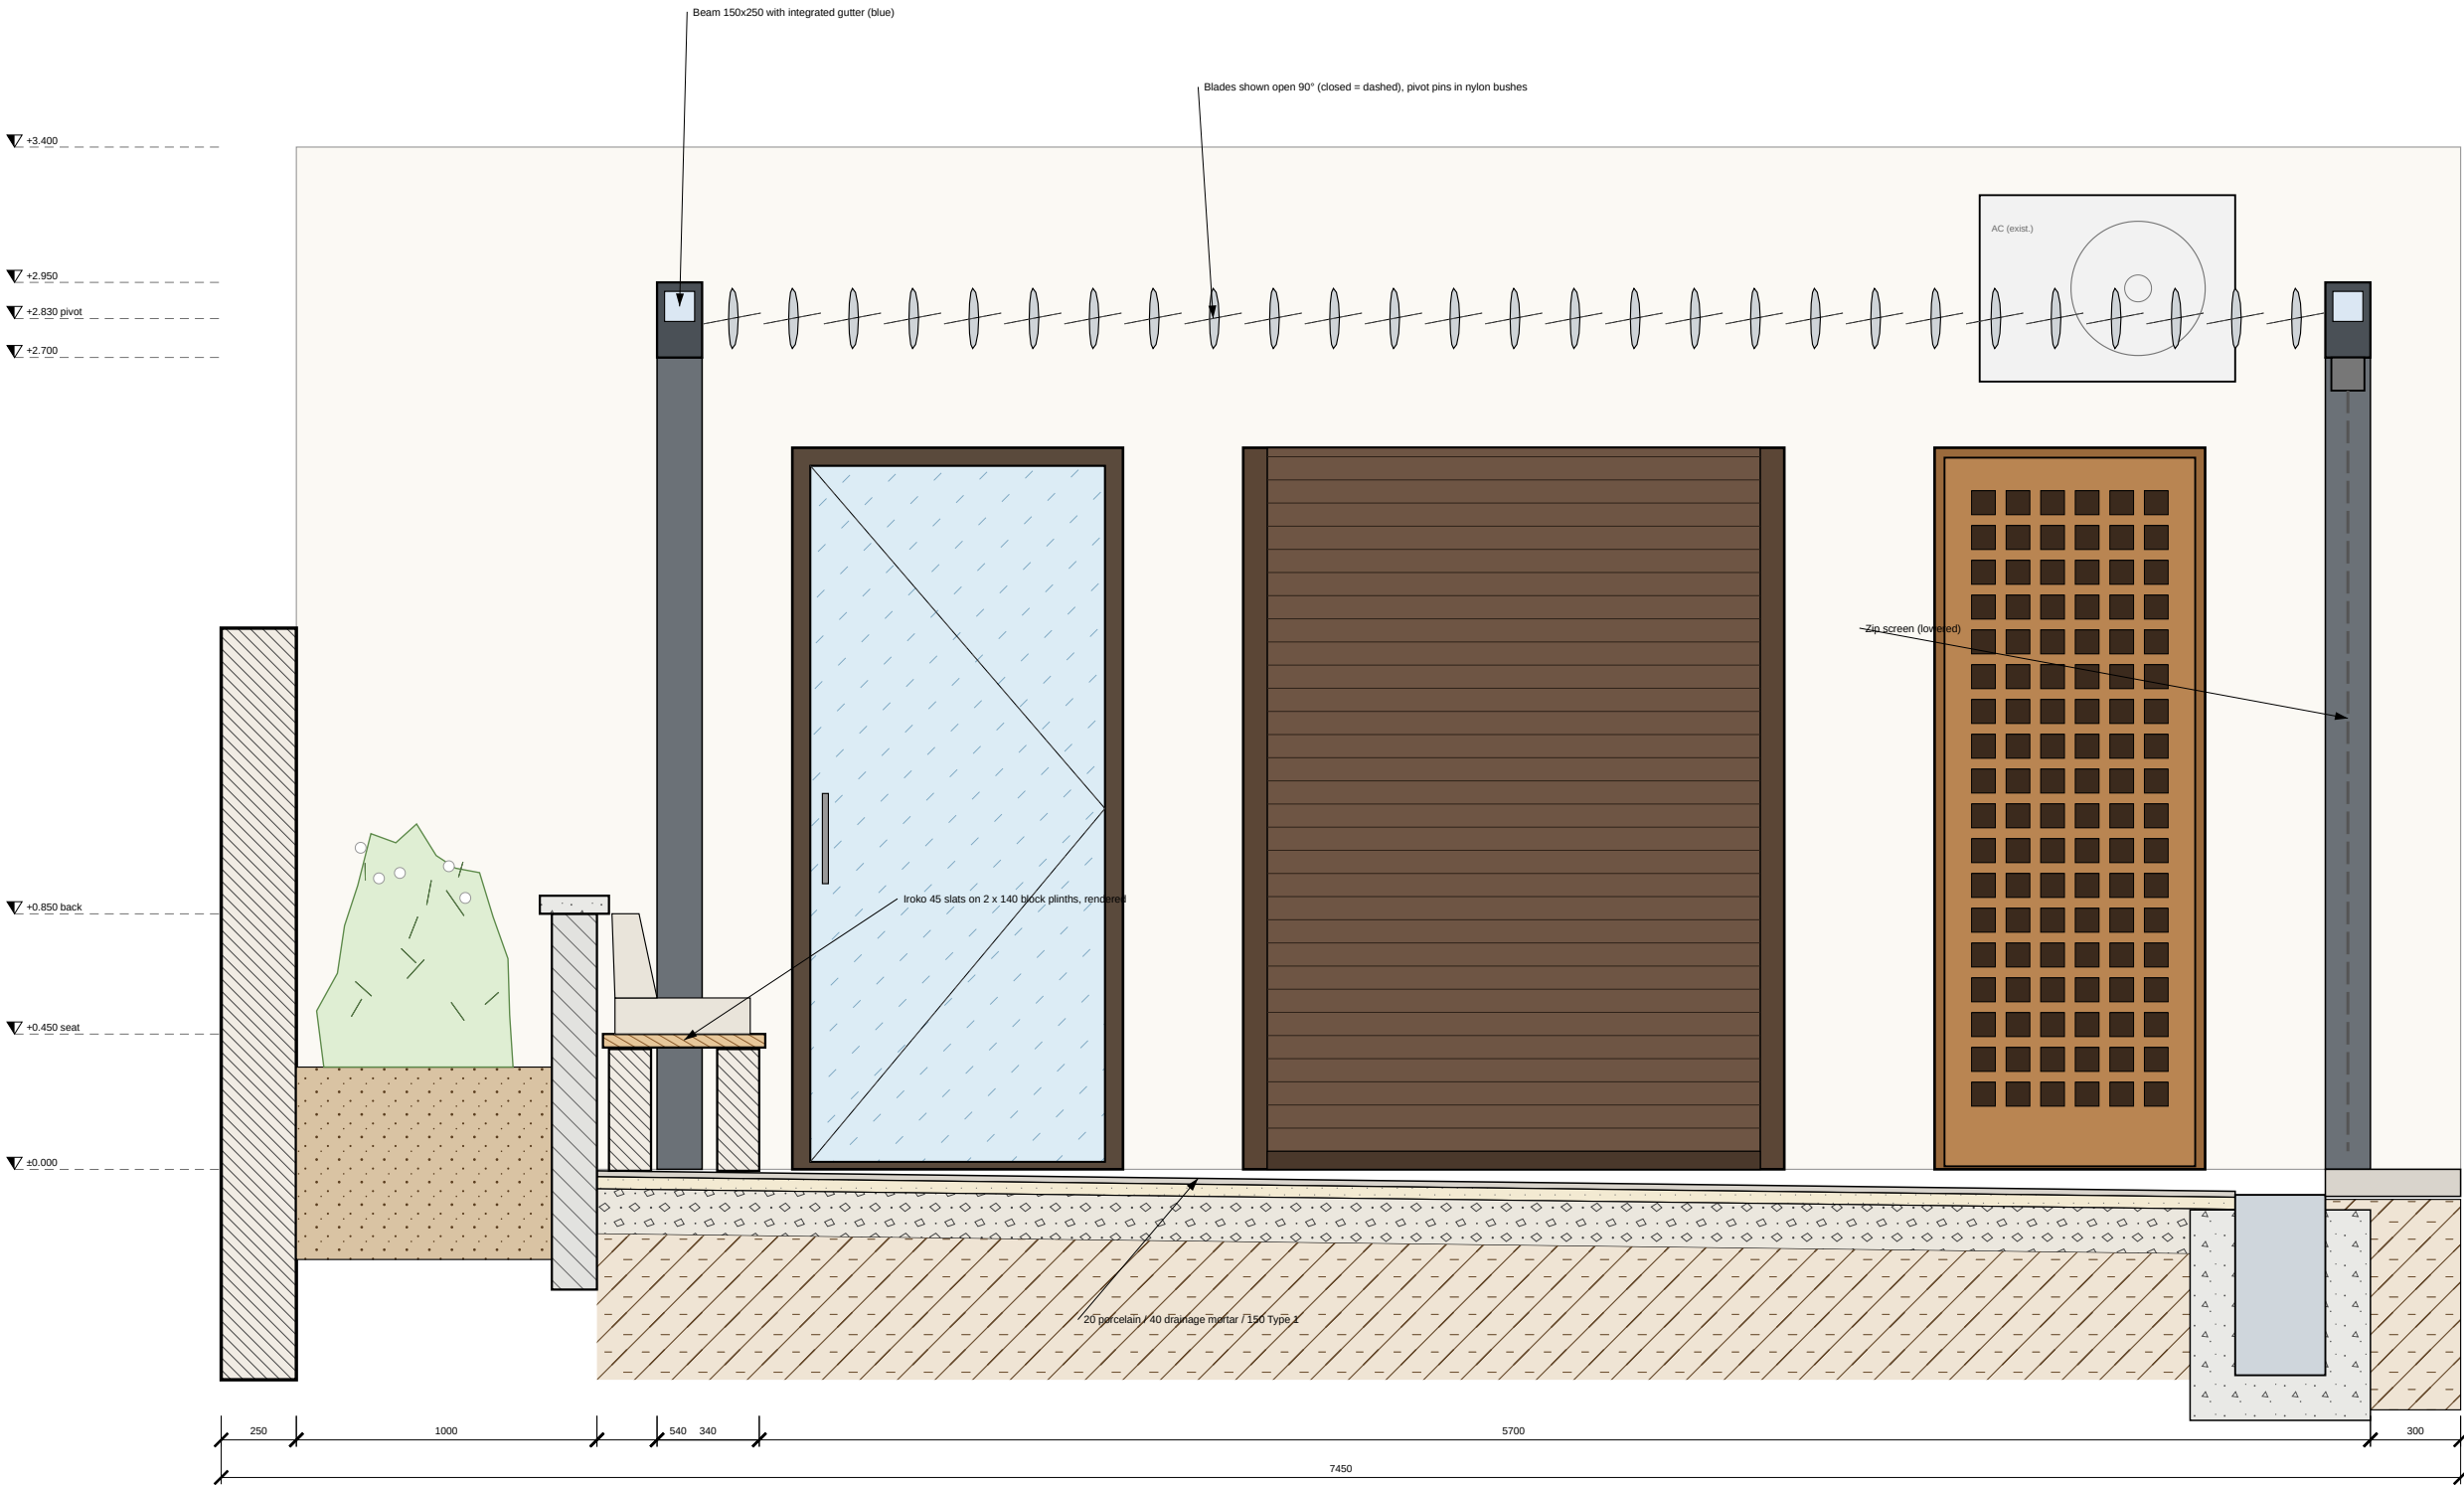


1 SECTION B-B
B-300 1:25 @ A3 through bench, pergola & gully G1, looking north



DB1 POST BASE — 1:10

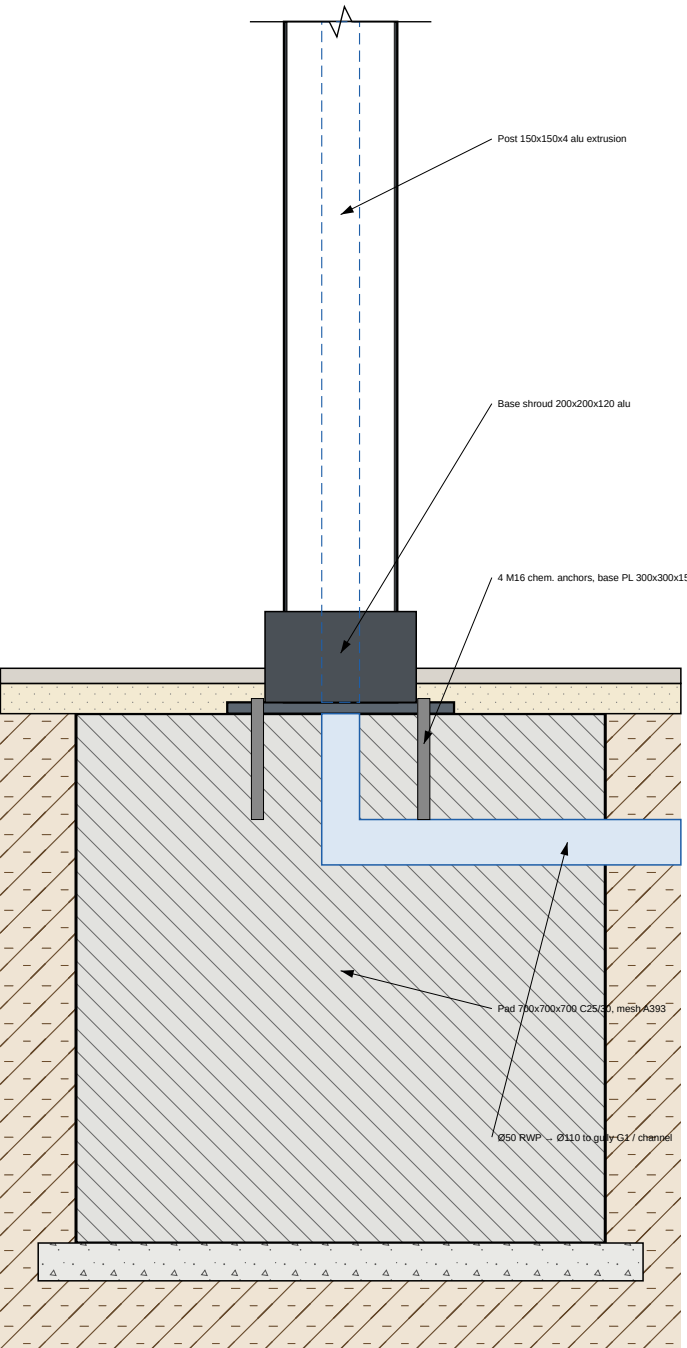

DB2 BEAM, GUTTER & BLADE — 1:5

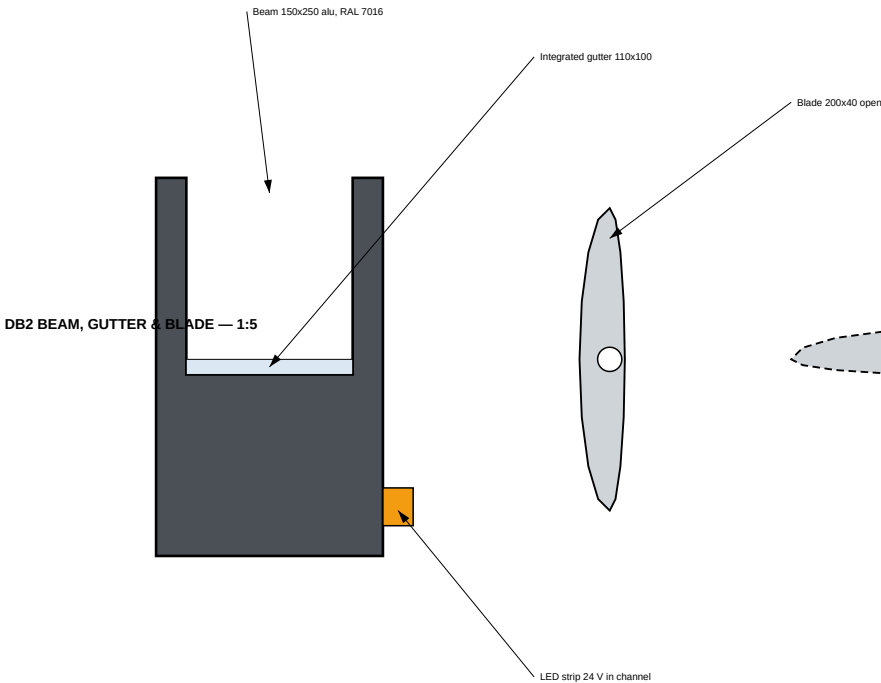

SYSTEM SPEC (performance)


- Proprietary freestanding bioclimatic pergola (e.g. Renson Algarve / Biossun / Brustor or equal), design & performance certified by supplier to EN 1991-1-3/-1-4 for site snow & wind; CE marked.
- Extruded aluminium 6063-T6, powder coat RAL 7016 Qualicoat cl. 2.
- Blades: aerofoil 200 mm, rotation 0–135°, watertight when closed (rain-sensor auto-close).
- Drive: 24 V linear actuator, rain + wind sensors, remote / app; manual crank override.
- Drainage: blades → integrated gutters → 4 posts → Ø110 to gullies.
- Lighting: perimeter LED 2700 K dimmable; 2 x 2 kW IR heaters on S beam.
- Zip screen: E side, PVC-free screen fabric 5% openness, wind class 3 (e.g. Fixscreen).
- Foundations: pad sizes are indicative — confirm with supplier's reactions (uplift).

ADVANTAGES

- No load on existing façade (freestanding) — no structural survey of annex needed.
- Adjustable shade/vent, fully closable to rain; heaters extend use to winter evenings.

closed (rain sensor)

DB3 BUILT-IN BENCH — 1:10

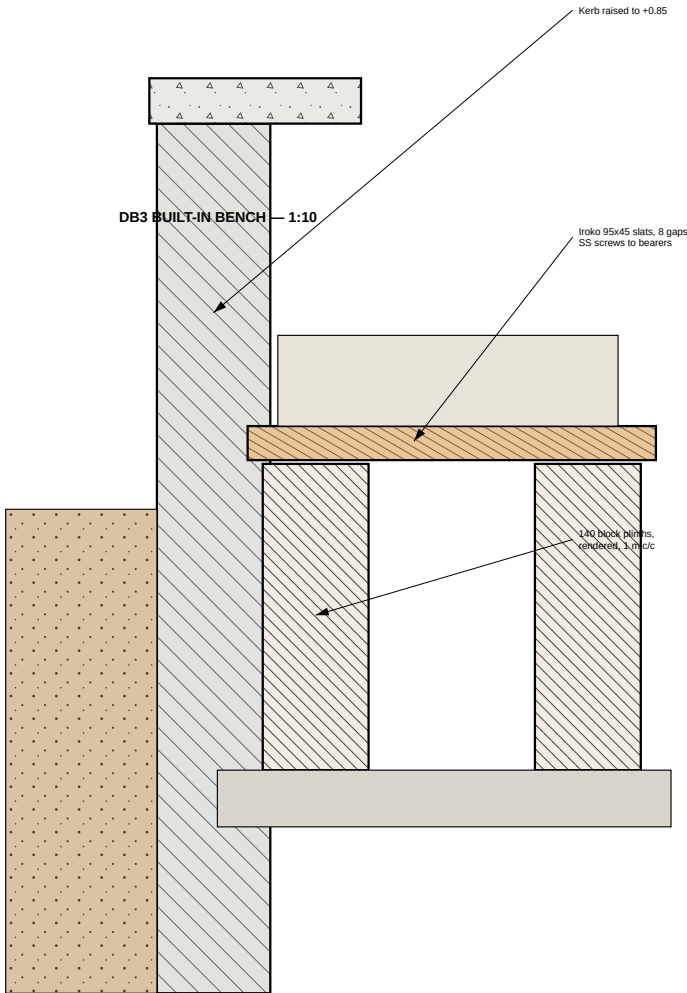

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE

Proposal B — details

SCALE @ A3 1:10 / 1:5	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No.

REV

B-500

C01

Item	Description	Unit	Qty	Rate
1	PRELIMINARIES			
1.1	Survey, set-up, protection, clean	item	1	
2	GROUNDWORKS & DRAINAGE			
2.1	Strip & excavate to formation	m³	13.0	
2.2	Pads 700x700x700 C25/30 + mesh	no	4	
2.3	Ø110 drains incl. post connections	m	28	
2.4	SD1 slot drain 5 m, gullies G1/G2	item	1	
3	PERGOLA SYSTEM (supplier)			
3.1	Bioclimatic pergola 5.7 x 3.6 m, 4 posts, motorised	no	1	
3.2	Integrated LED + dimmer	item	1	
3.3	IR heaters 2 kW IP65	no	2	
3.4	Zip screen E side 3.3 x 2.55	no	1	
3.5	Rain/wind sensors, app control	item	1	
4	PAVING			

Pergola system price to be obtained from 2-3 approved suppliers including foundations design; all other items measured from drawings.

Item	Description	Unit	Qty	Rate
4.1	Type 1 sub-base 150	m²	52.1	
4.2	20 mm porcelain 600x600 R11 on 40 drainage mortar + primer	m²	52.1	
5	PLANTER & BENCH			
5.1	Planter (as Design A A-302) incl. planting & drip	m	8.4	
5.2	Kerb raised to +0.85 along bench	m	3.2	
5.3	Bench plinths + iroko seat 500 deep	m	3.2	
5.4	Outdoor cushions (FF&E allowance)	item	1	
6	ELECTRICAL			
6.1	Dedicated 16 A RCBO circuit for pergola + heaters 20 A	item	1	
6.2	Uplights UL1-6, sockets SO1-2 IP66	item	1	
7	FINISHES			
7.1	Façade & wall repair/repaint	m²	40	
8	CONTINGENCY	%	7.5	

COURTYARD — PROPOSAL B

Bioclimatic louvred pergola lounge — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE

Proposal B — schedules & bill of quantities

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	QUANTITIES


DRAWING No. REV

B-600C01

PROPOSAL C — TIMBER GARDEN ROOM & OUTDOOR KITCHEN

Glulam garden room with a glass roof for dining, plus an open-air outdoor kitchen along the house wall and tumbled travertine paving.

AXONOMETRIC FROM SOUTH-EAST (east wall cut away at 1.0 m) — NTS

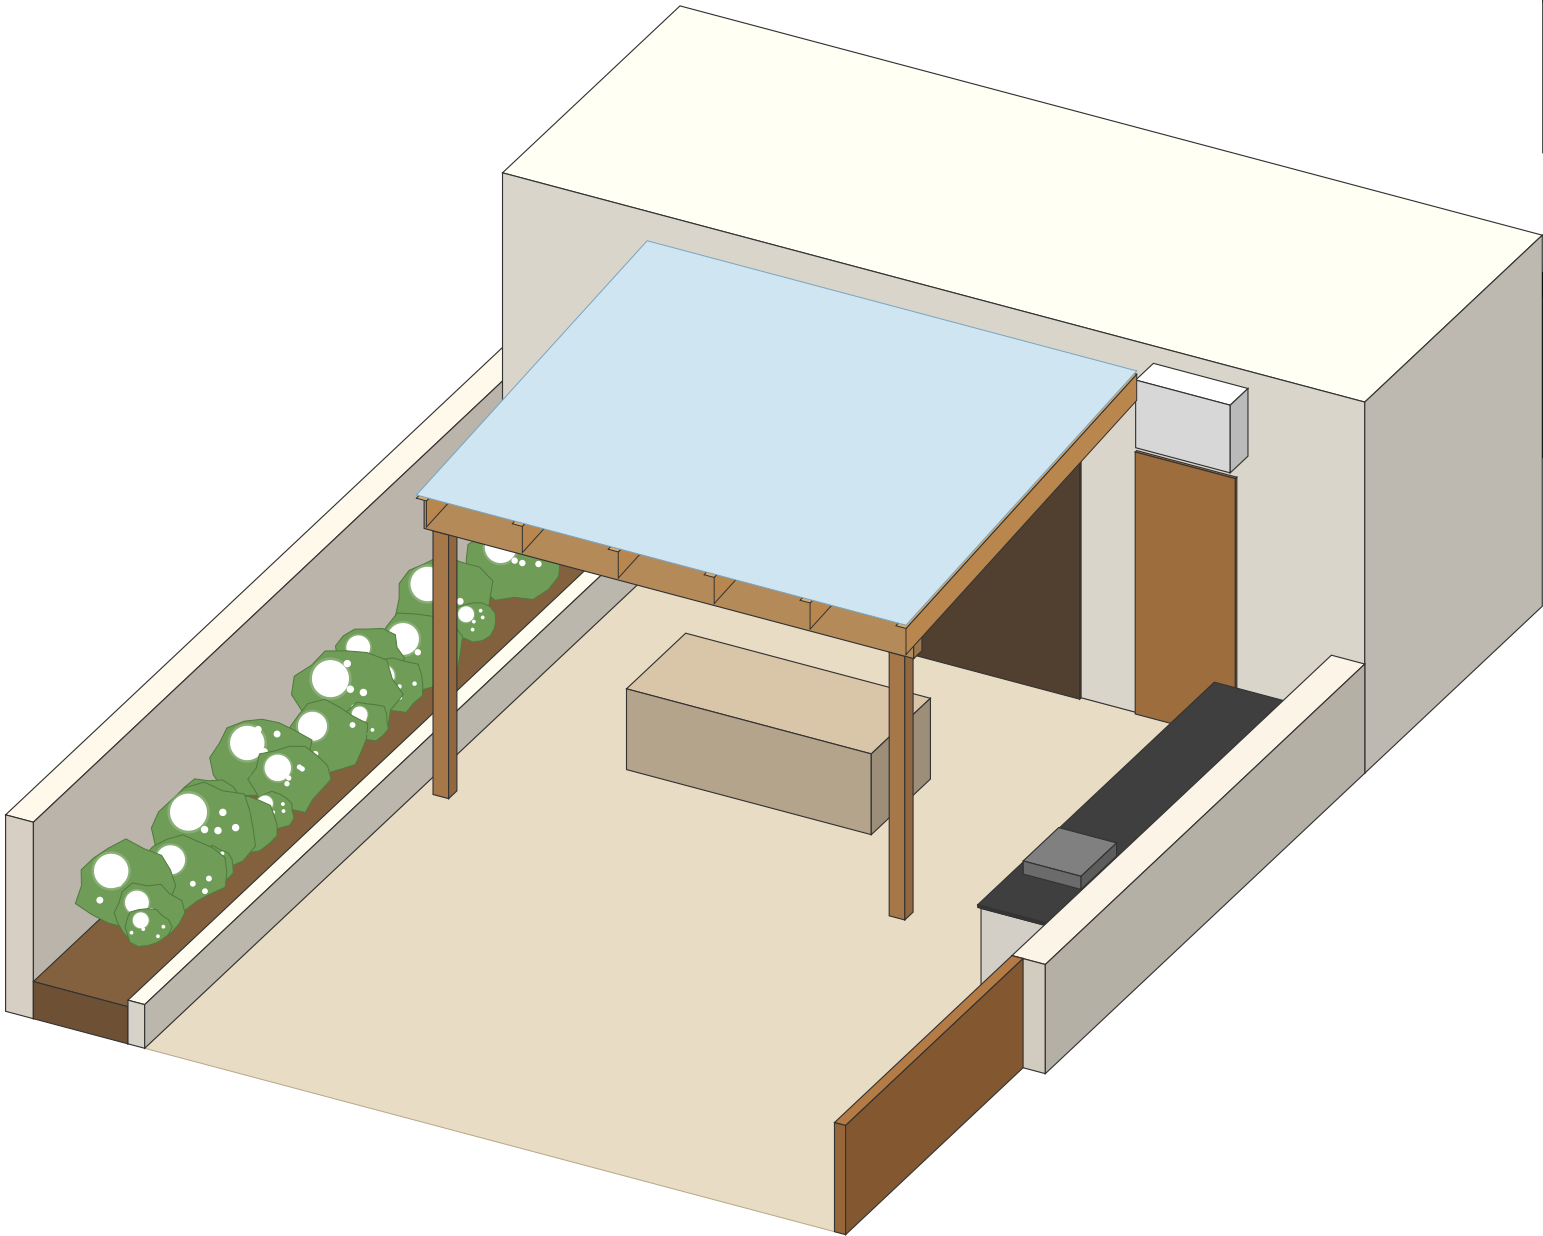

CONCEPT

Warm timber structure with a 5" glass roof keeps the doors and hall bright while giving all-weather dining for 8. Cooking happens in the open air beside it: a 4 m built-in kitchen with grill, sink and fridge along the east wall, with services next to the existing utility room.

KEY FEATURES

- GL24h larch glulam, 6 rafters @ 862, front beam on 2 posts (no post mid-span).
- 8+8 laminated solar-control glass, optional motorised shade.
- Outdoor kitchen: grill outside the roof, sink & fridge, sintered-stone top.
- Tumbled travertine in French pattern; planter & jasmine retained.

DRAWING REGISTER

No.	Title
C-000	Cover, concept & register
C-100	General arrangement plan 1:50
C-101	Roof & structure plan 1:25
C-200	Elevation A 1:25
C-300	Section A-A (N-S) 1:20
C-500	Details 1:2 / 1:5 / 1:10
C-600	Schedules & BOQ

COMPARISON WITH DESIGN A

Criterion	Design A	Prop. C
Roof	Opaque membrane	Glass (bright)
Material	Steel + timber	Glulam timber
Cooking	—	Outdoor kitchen 4 m
Load on façade	Ledger	Ledger (lighter)
Paving	Concrete pavers	Travertine
Cost class	€€	€€€
Daylight to doors	Reduced	Maintained
Maintenance	Oil timber	Clean glass, oil

COURTYARD — PROPOSAL C

Timber garden room & outdoor kitchen — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE


Proposal C — cover, concept & drawing register

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV


C-000

C01

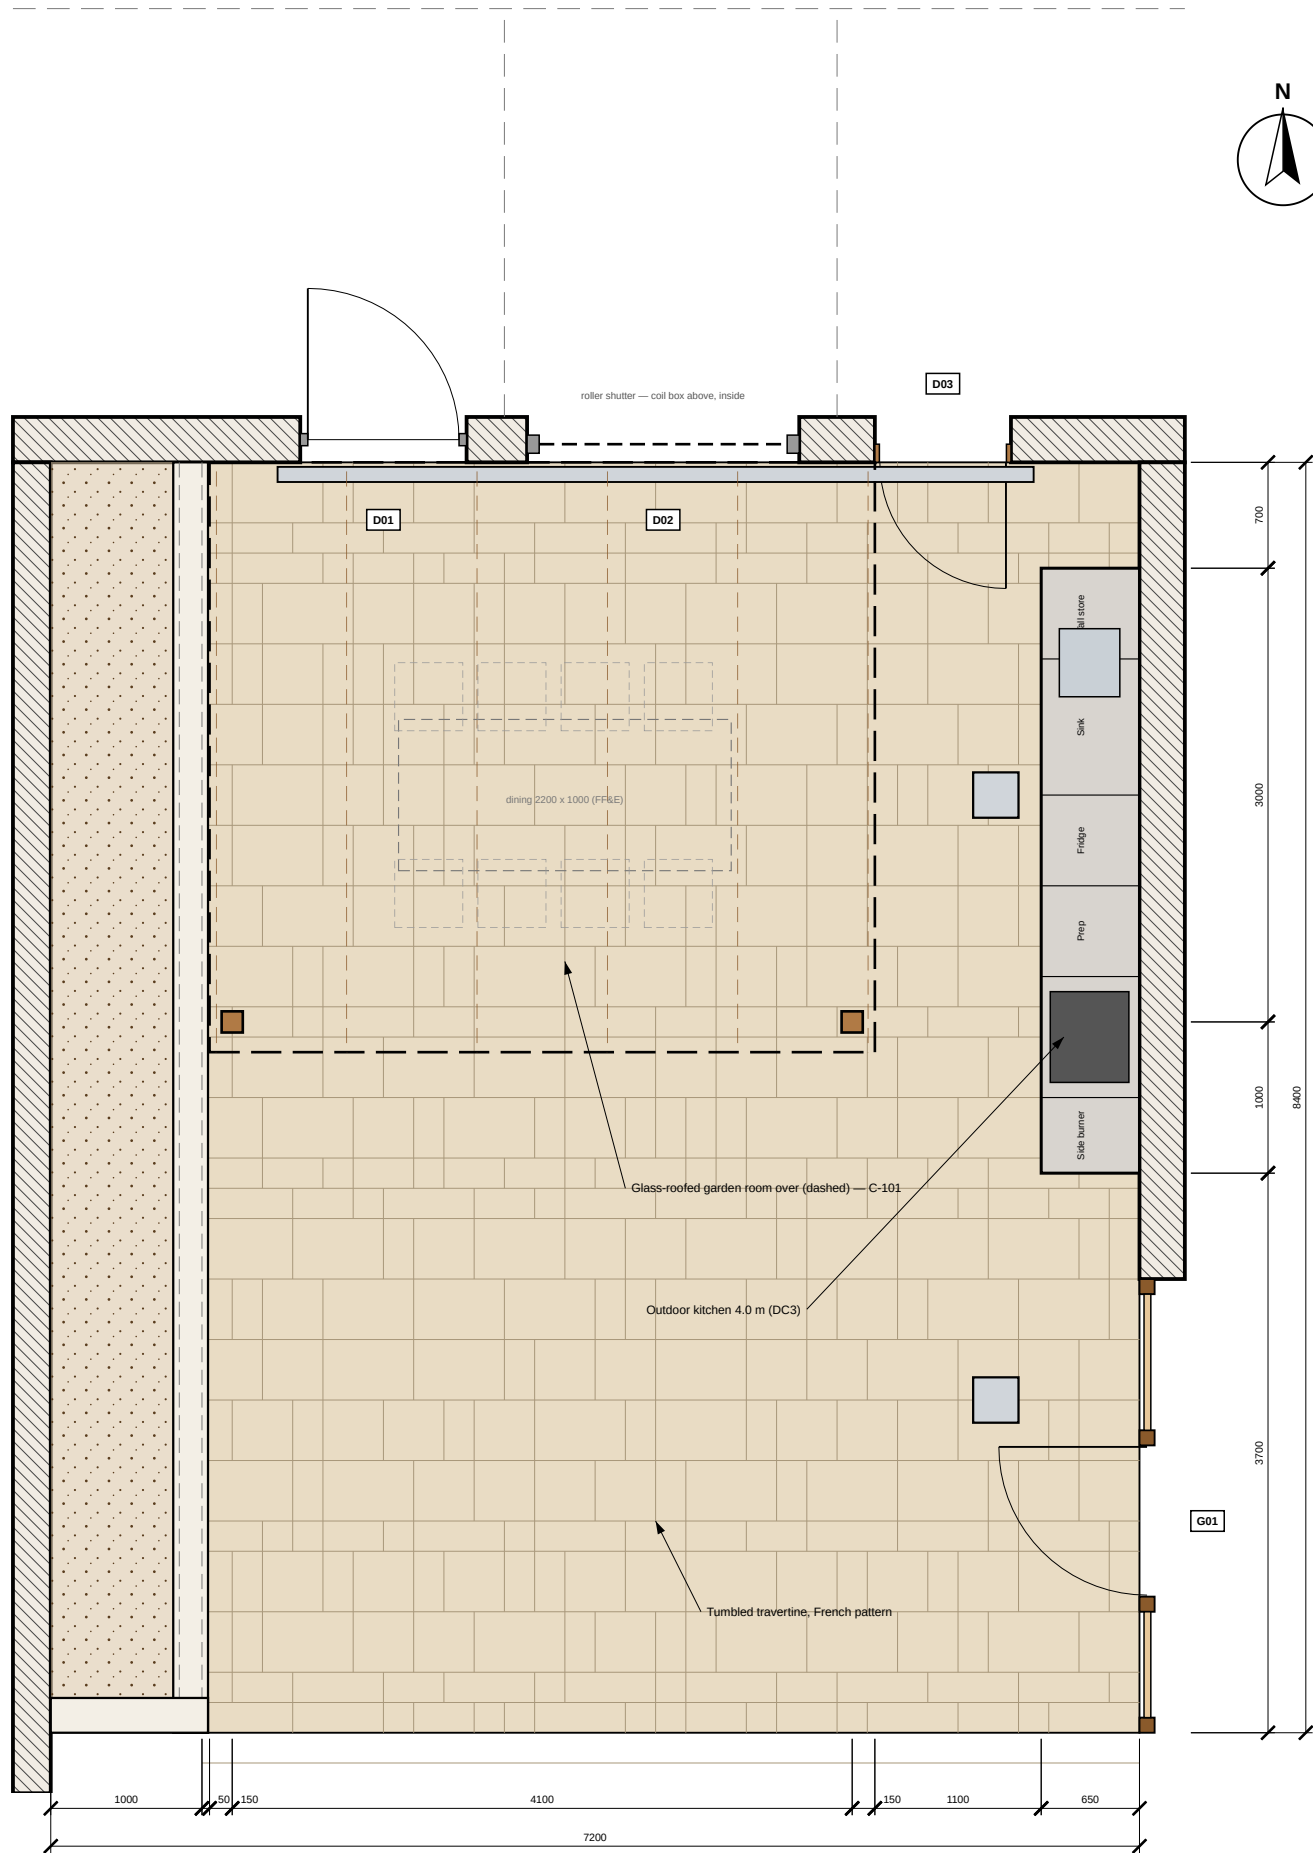

- NOTES**
- Roof stops at X = 5450 so AC1 above D03 stays in the open (no relocation needed).
 - Gullies G1/G2 move west to X = 6250 (clear of kitchen); falls 1:80 to them, kitchen side 1:60.
 - Kitchen waste connects to G1 via trap; water from utility; LPG cupboard ventilated.
 - Travertine: 30 mm tumbled, filled, frost-resistant; laid on 30 mortar bed on 100 slab.
 - Planter & planting as A-104; add herbs (thyme, oregano, sage) at S end.

1
C-100
GENERAL ARRANGEMENT PLAN
1:50 @ A3



COURTYARD — PROPOSAL C

Timber garden room & outdoor kitchen — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE
Proposal C — general arrangement plan

SCALE @ A3 1:50	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. **C-100** REV **C01**

COURTYARD — PROPOSAL C

Timber garden room & outdoor kitchen — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)



DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE
Proposal C — roof & structure plan

SCALE @ A3 1:25	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. REV

C-101 C01

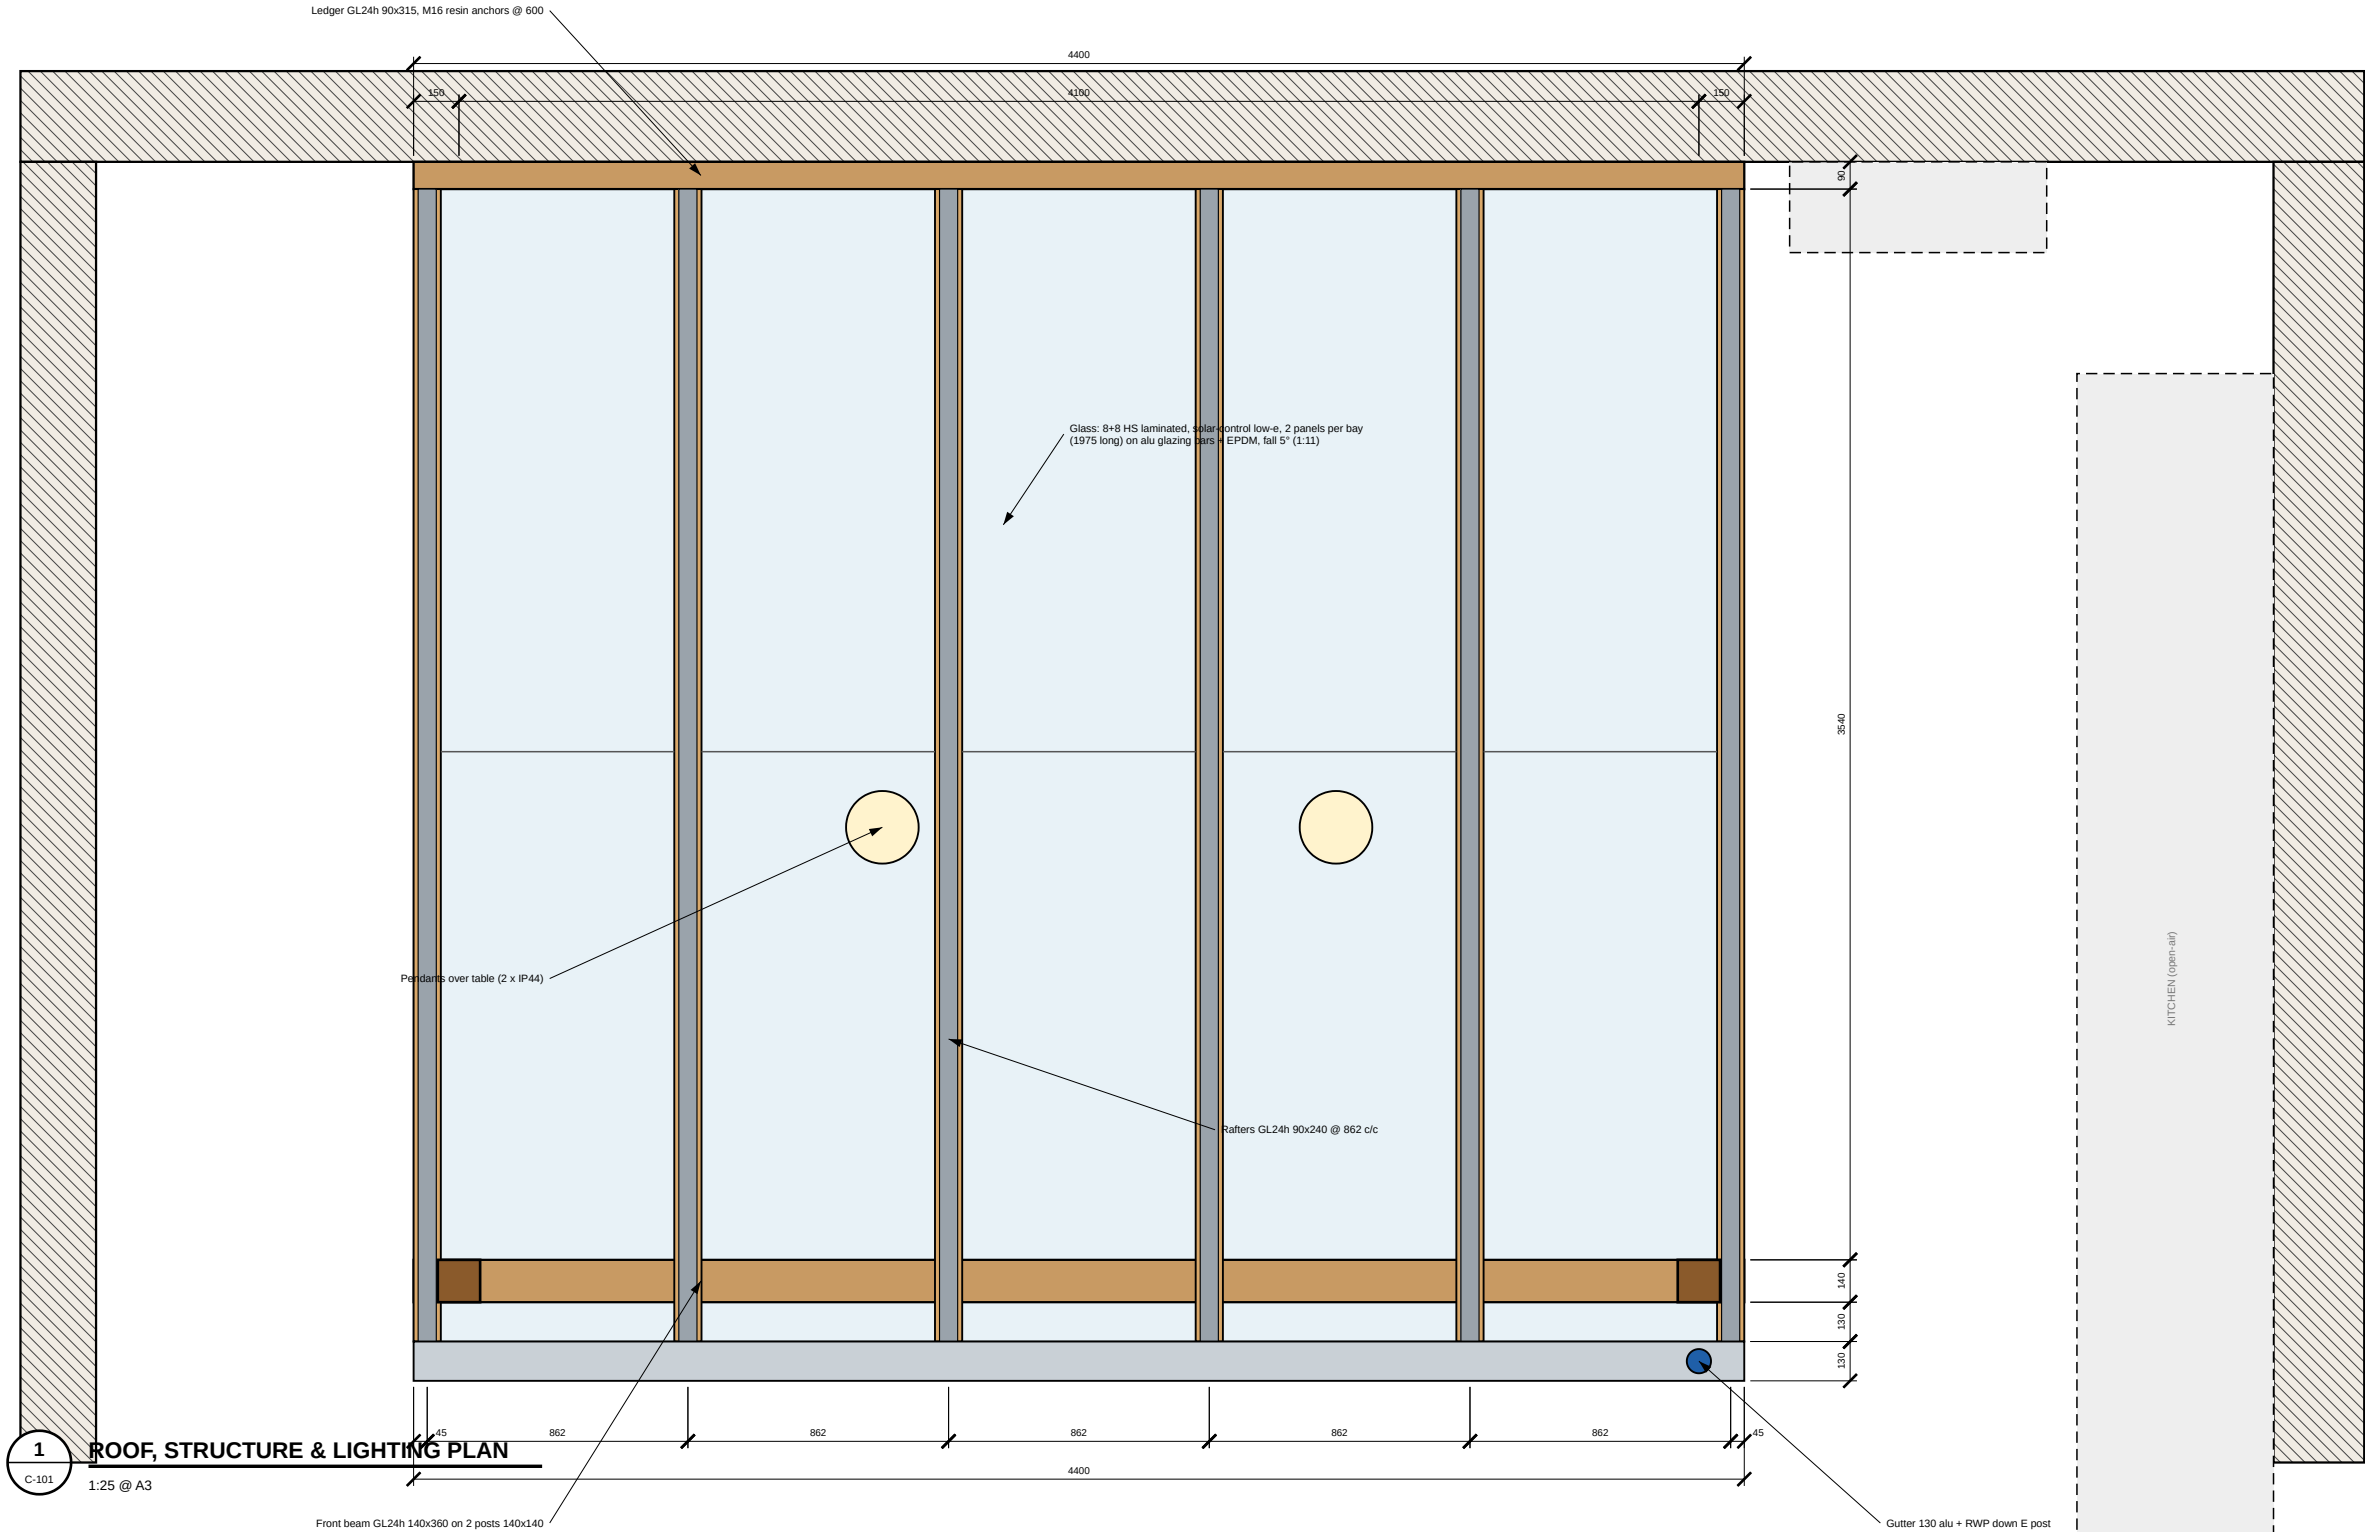

COURTYARD — PROPOSAL C

Timber garden room & outdoor kitchen — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction


DRAWING TITLE

Proposal C — elevation A (looking north)


SCALE @ A3	DATE
1:25	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

C-200 C01

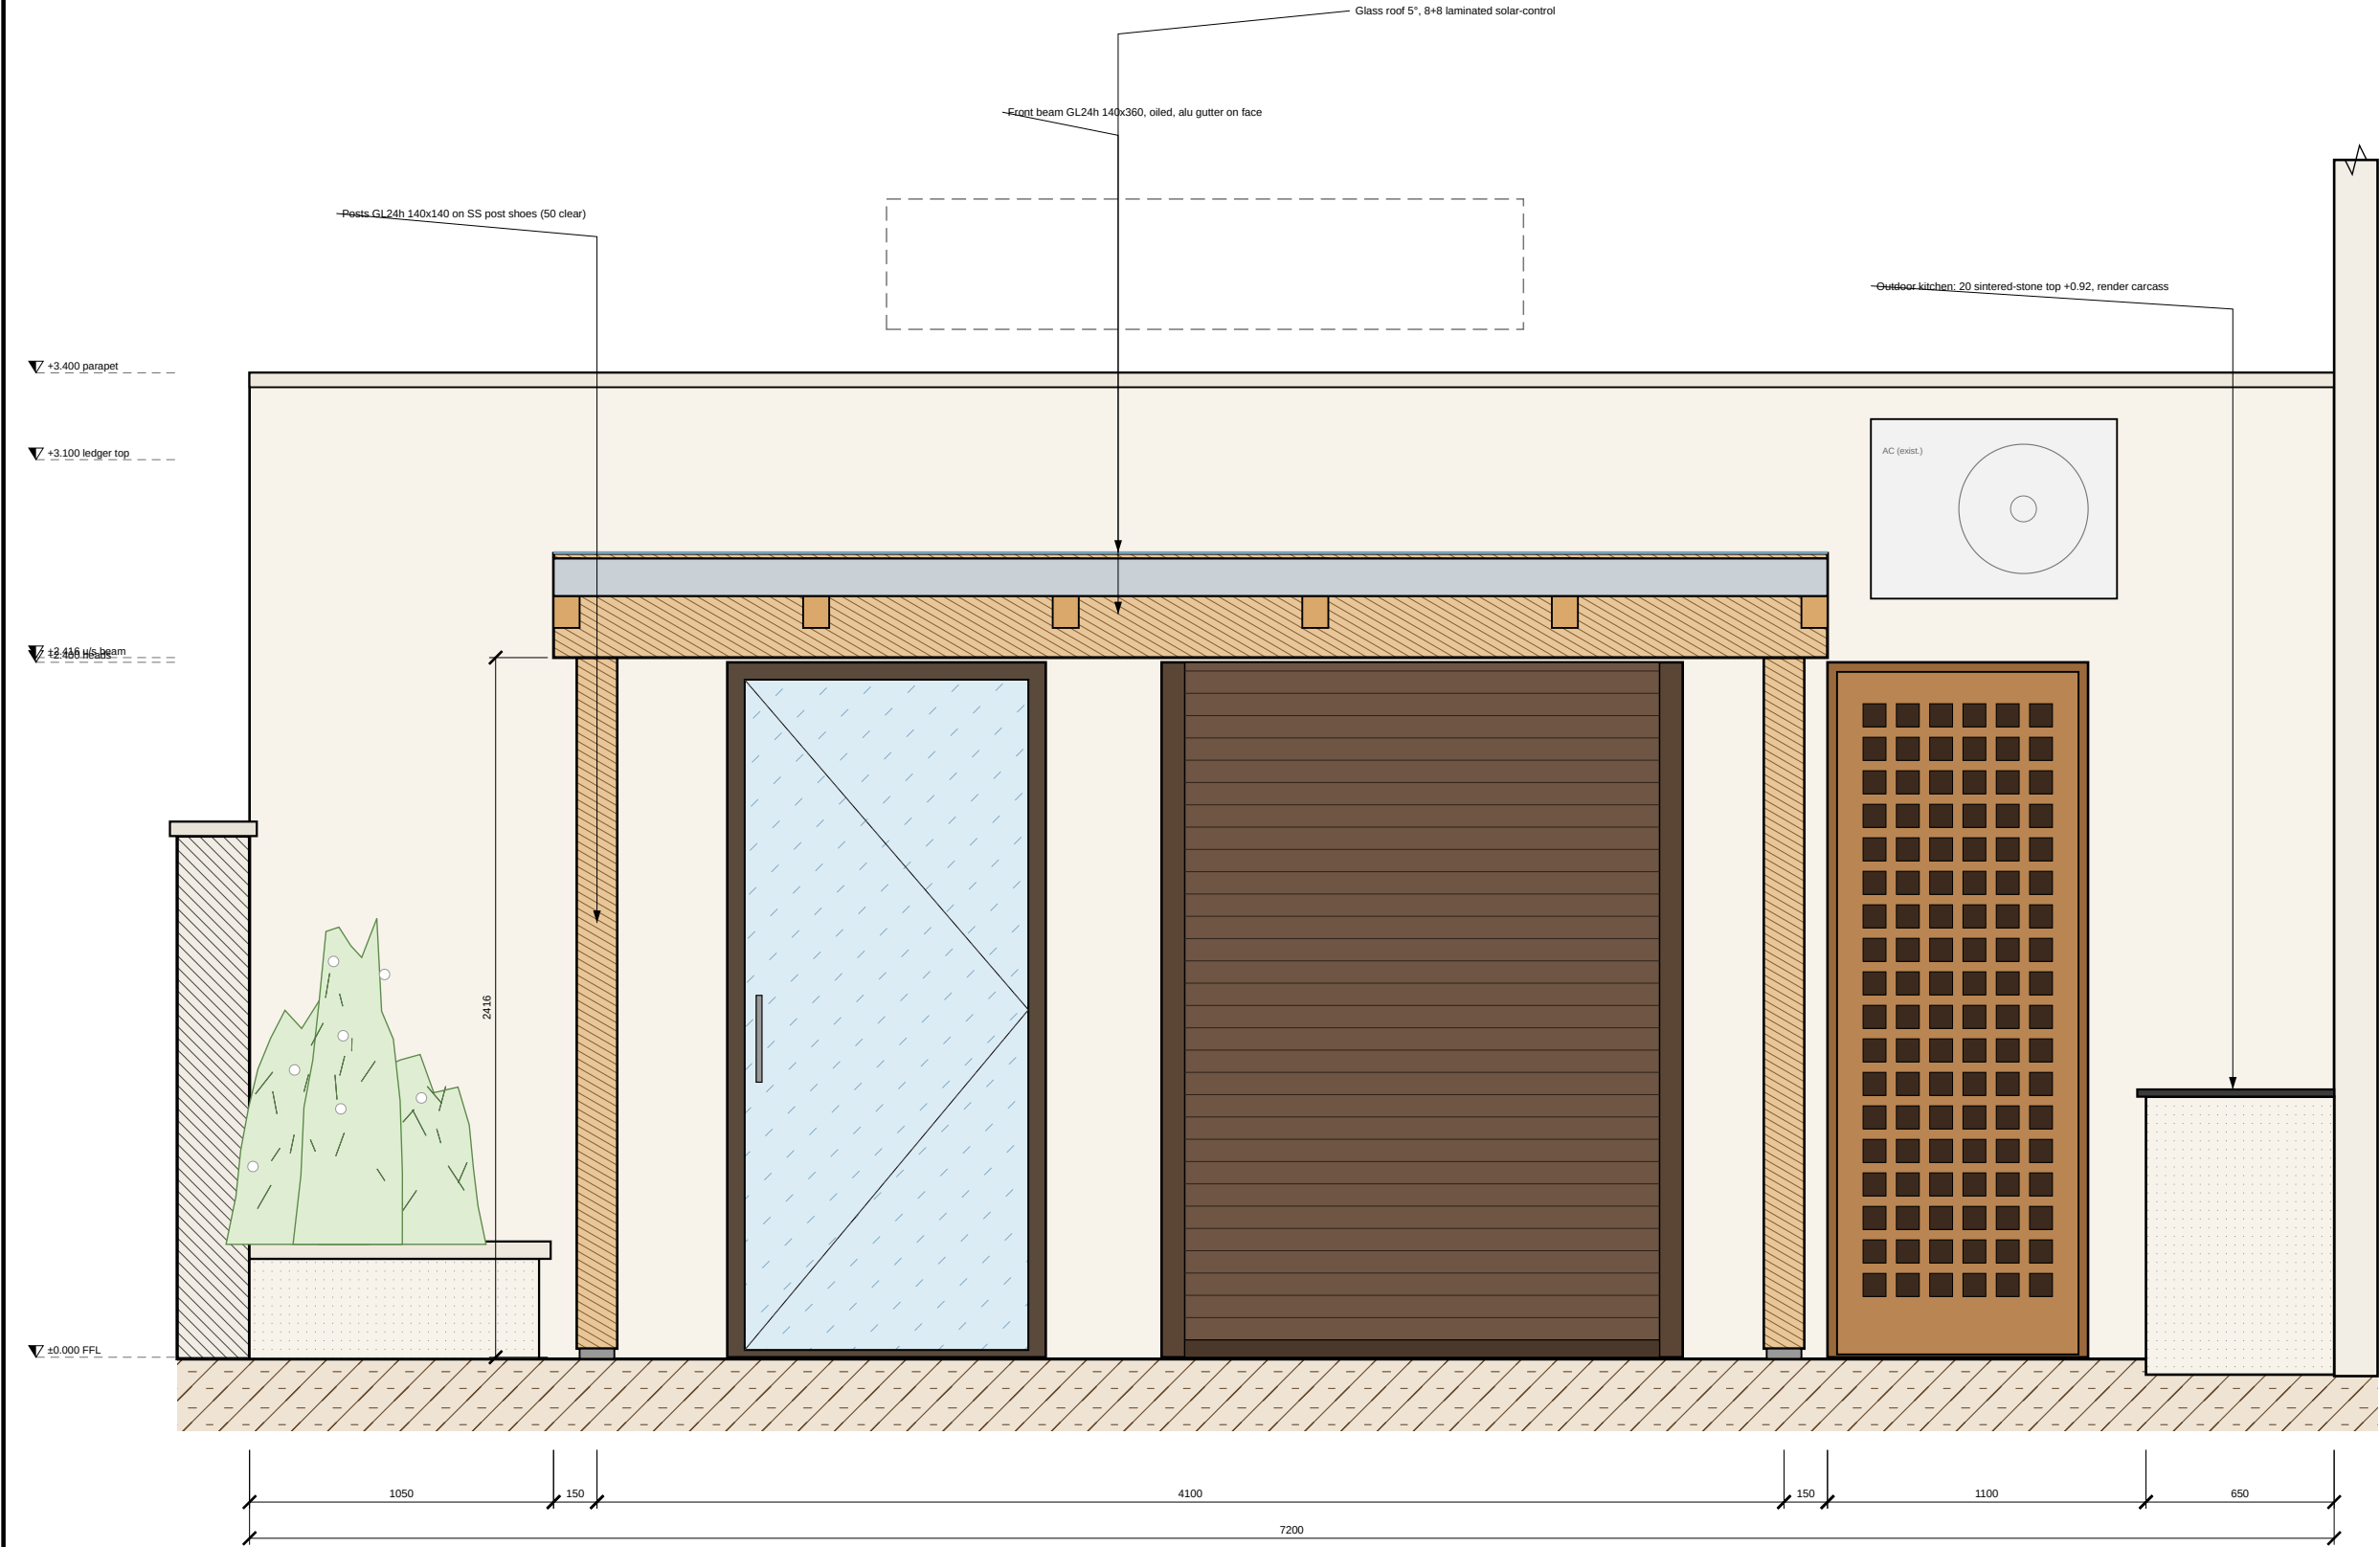

1 ELEVATION A — GARDEN ROOM & KITCHEN (looking north)
C-200 1:25 @ A3

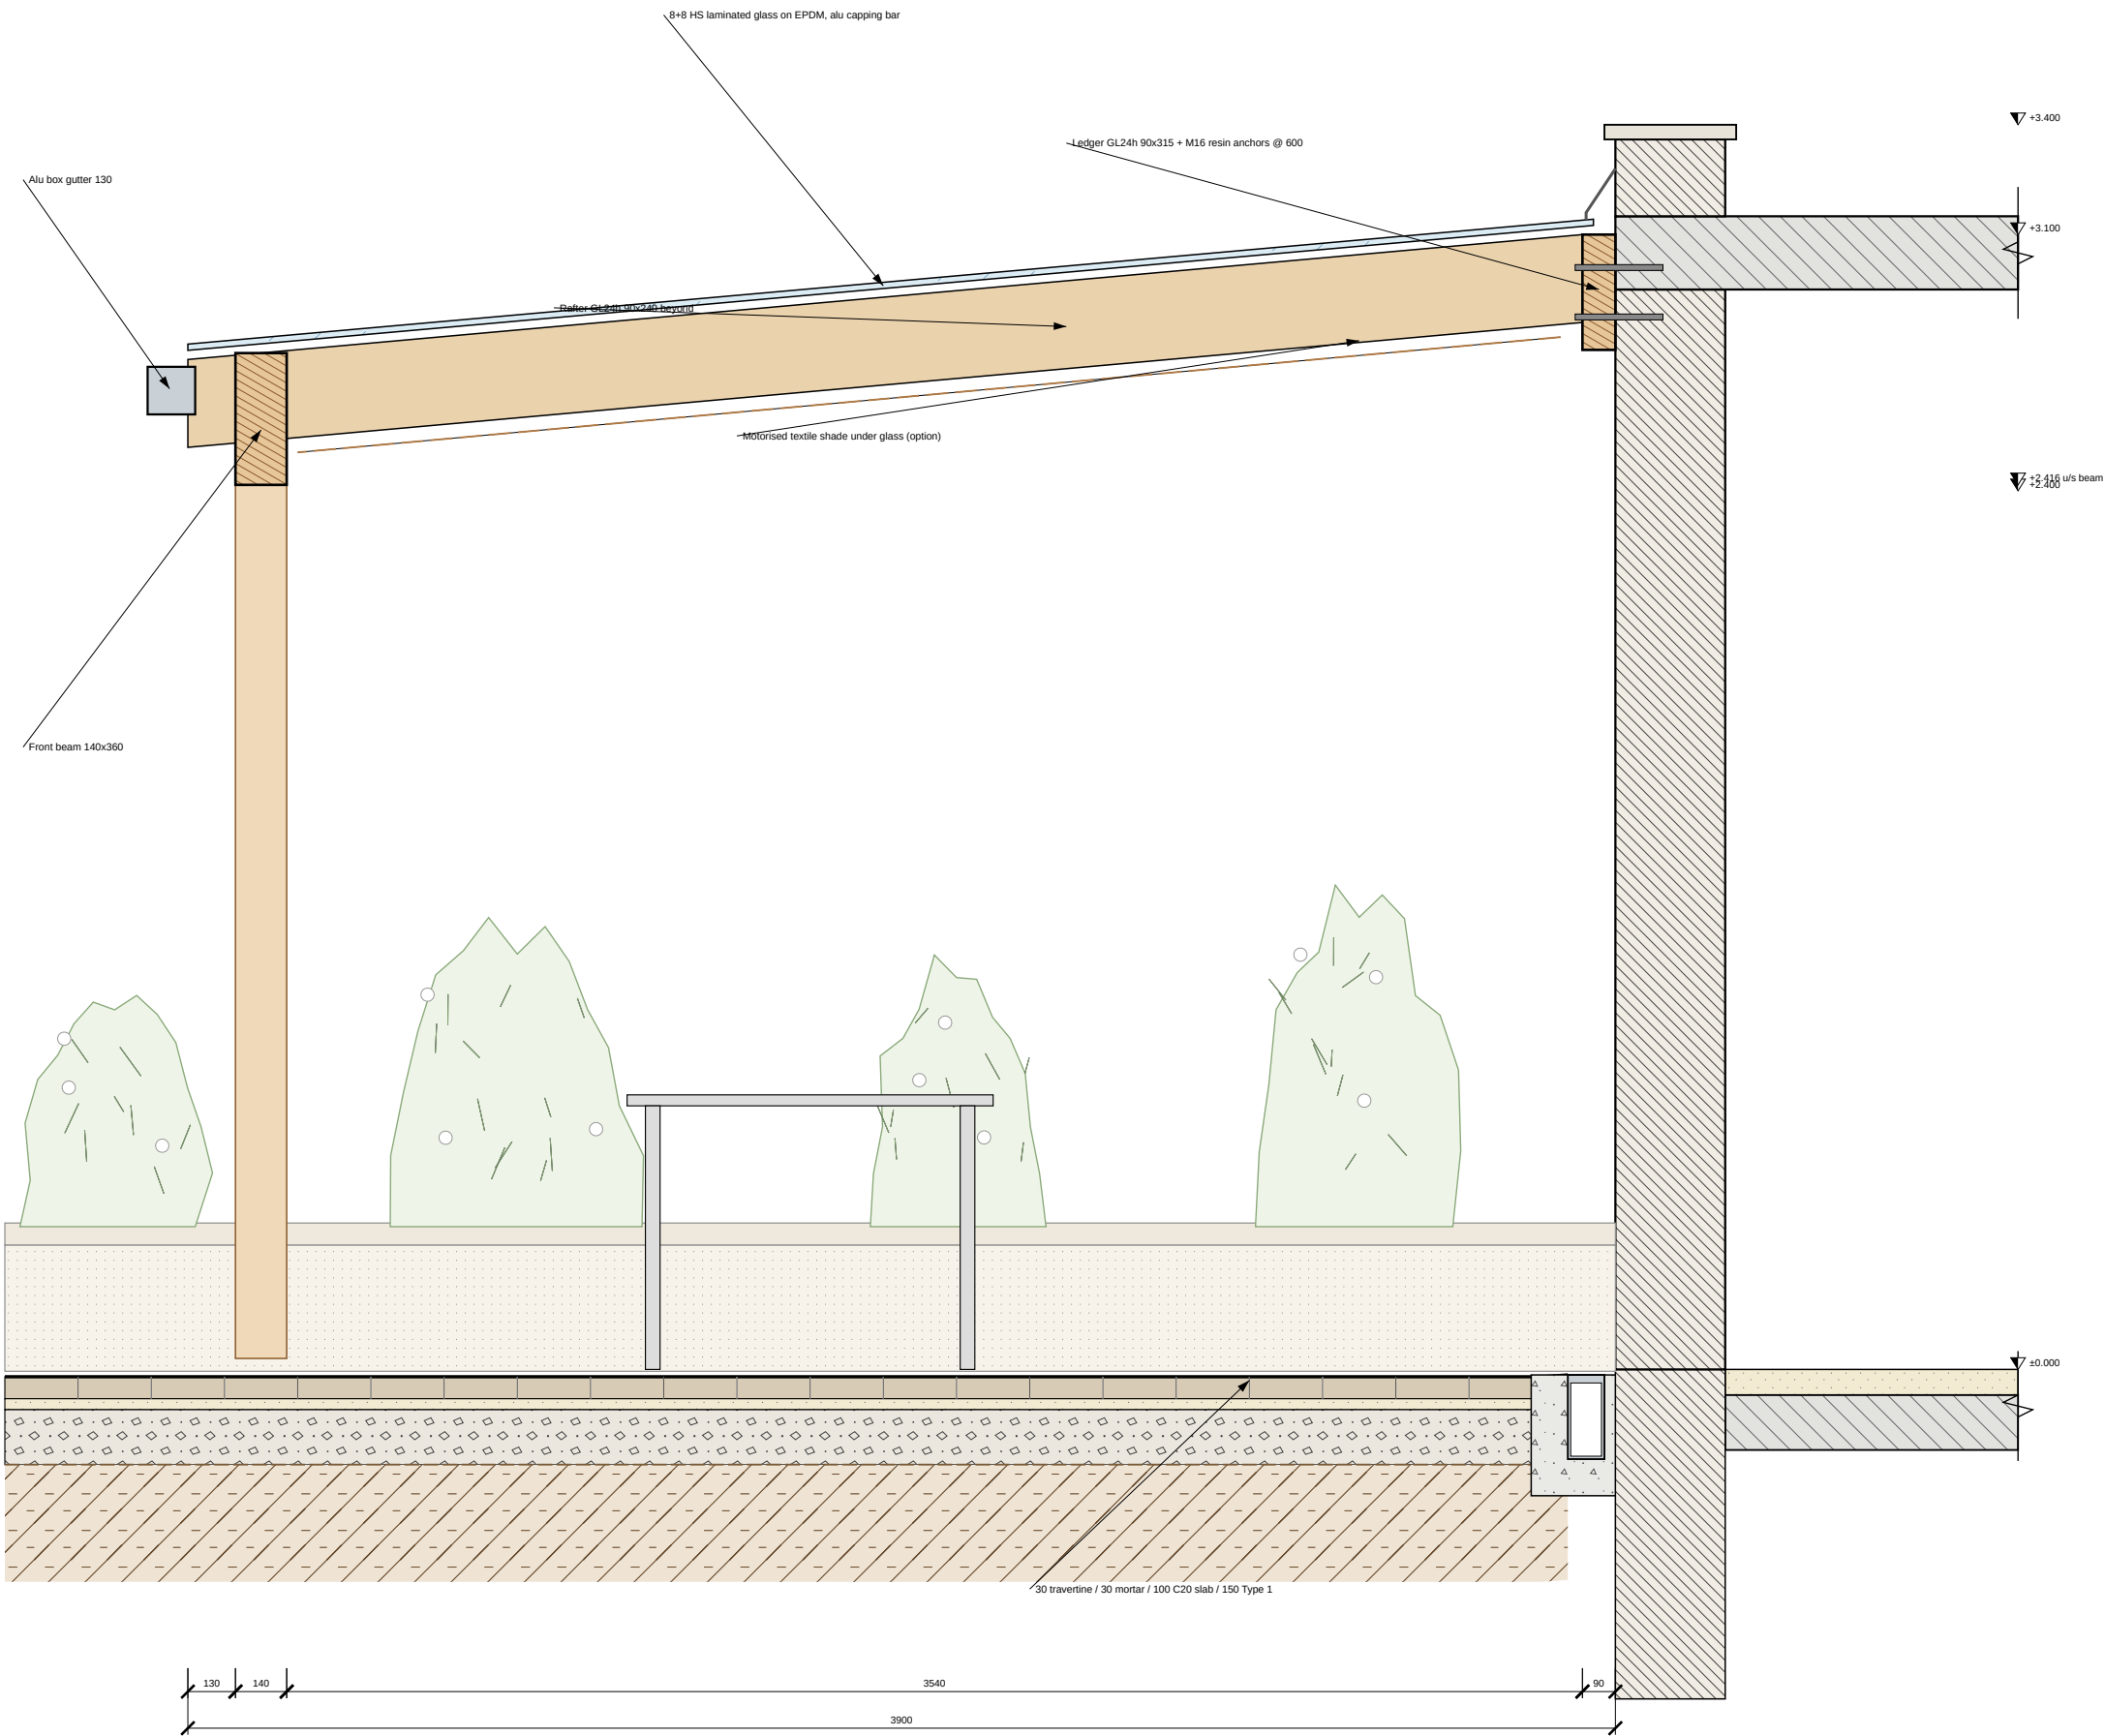

1 SECTION A-A
C-300 1:20 @ A3 through ledger, glass roof & front beam, looking west

COURTYARD — PROPOSAL C

Timber garden room & outdoor kitchen — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)


DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE
Proposal C — section A-A (N-S at X = 3000)


SCALE @ A3 1:20	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. **C-300** REV **C01**


DC1 GLAZING BAR ON RAFTER — 1:2

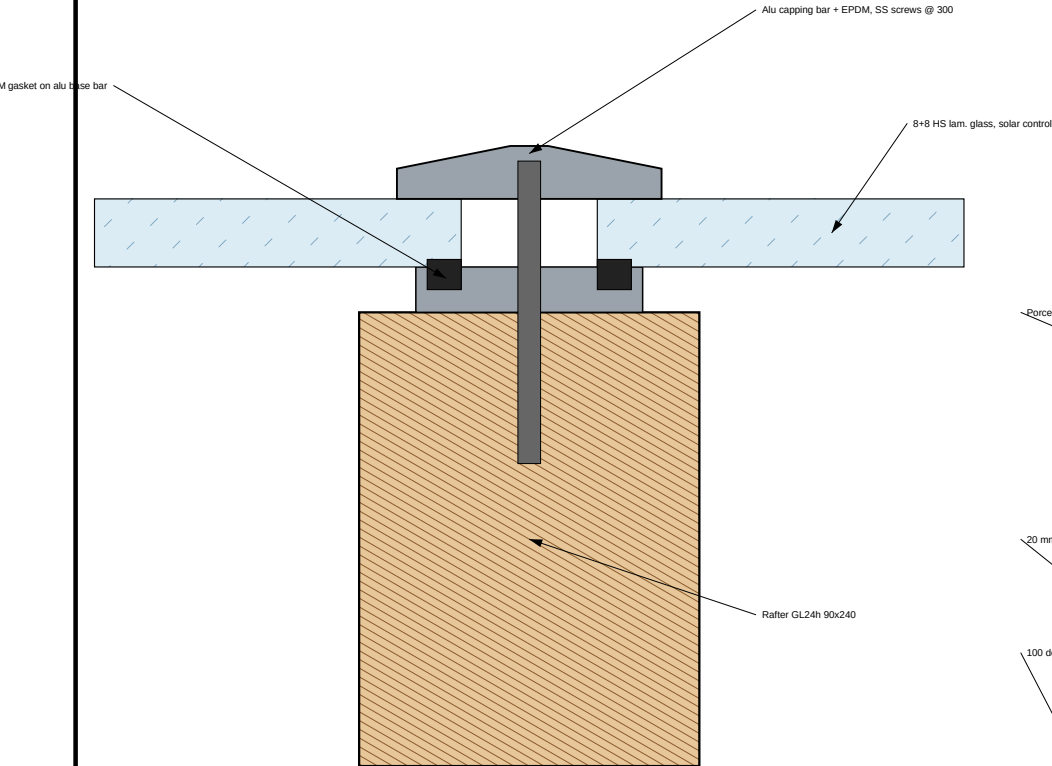

DC2 POST SHOE — 1:10

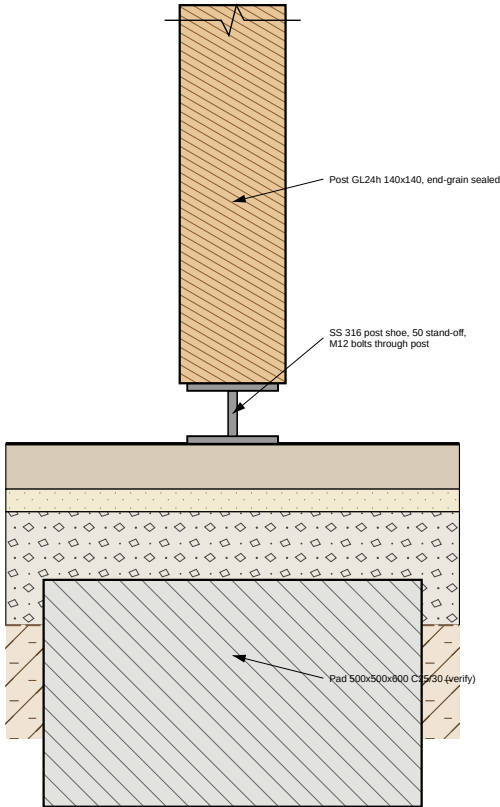

DC3 OUTDOOR KITCHEN COUNTER — 1:10

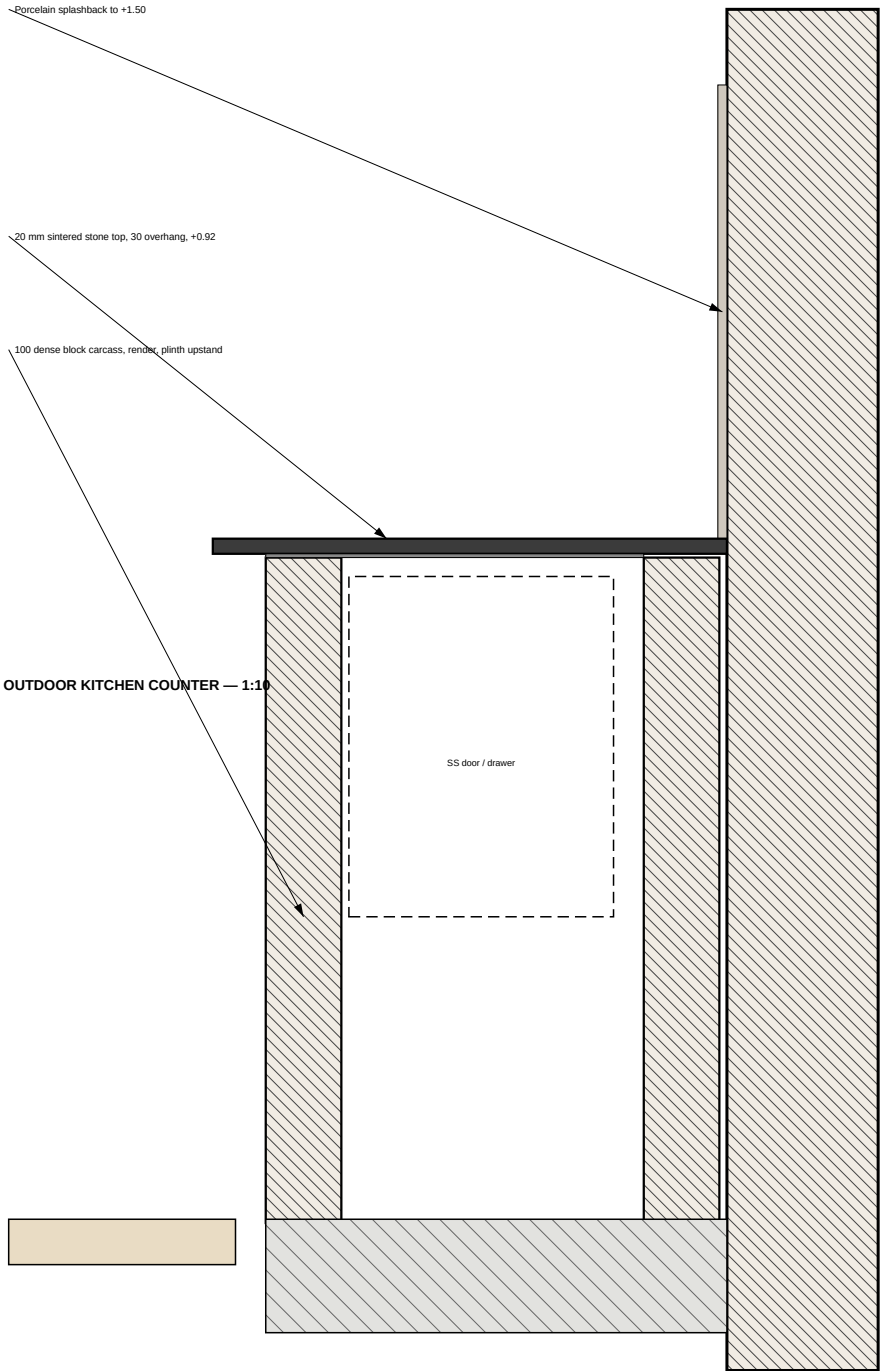

STRUCTURE (preliminary)

- Glulam GL24h (EN 14080), service class 3 — use durable-species lamellas (larch/Douglas) or treated; oil finish; tops of beams capped with alu flashing.
- Front beam 140x360 span 4.1 m: $M = 9 \text{ kNm}$, $\sigma = 3 \text{ MPa} \ll 17 \text{ MPa}$.
- Rafter 90x240 @ 862 span 3.7 m: $\delta = 3 \text{ mm}$ (L/1400).
- Ledger 90x315: 2 M16 resin anchors @ 600 into RC ring beam (survey!).
- Loads: glass 0.45, timber 0.15, snow 1.0 kN/m² (assumed).
- Bracing: knee braces in façade plane not needed — ledger + 2 posts + glass/bars diaphragm; add SS diagonal tie-rods in roof plane if engineer requires.

KITCHEN SERVICES

- Cold water 15 mm from utility (frost drain-down valve), sink waste 40 mm — trap —, gully G1 (relocated to X = 6250).
- LPG 2 x 11 kg in ventilated cupboard (low-level vents), regulator, hose ≤ 1.5 m; or natural gas by Gas Safe/licensed fitter.
- Power: 16 A RCBO, 2 twin IP66 sockets + fridge spur; LED strip under top.
- Grill sits OUTSIDE the glass roof (smoke & heat) — keep 1.0 m clear of AC2.

COURTYARD — PROPOSAL C

Timber garden room & outdoor kitchen — alternative to Design A (same courtyard, existing doors retained)

Client: Owner / Client

Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE

Proposal C — details

SCALE @ A3

1:2 / 1:5 / 1:10

DRAWN / CHECKED

CC / —

DATE

06.10.2026

SERIES

ARCHITECTURAL

DRAWING No.

C-500

REV

C01

Item	Description	Unit	Qty	Rate
1	PRELIMINARIES & SURVEY			
1.1	Survey incl. ring-beam check for ledger	item	1	
2	GROUNDWORKS & DRAINAGE			
2.1	Strip & excavate	m³	15.6	
2.2	Post pads 500x500x600	no	2	
2.3	Gullies relocated to X = 6250, Ø110 drains	item	1	
2.4	C20 slab 100 under travertine + mesh	m²	52.1	
3	GLULAM STRUCTURE			
3.1	Ledger GL24h 90x315	m	4.4	
3.2	Front beam GL24h 140x360	m	4.4	
3.3	Rafters GL24h 90x240	m	23.7	
3.4	Posts GL24h 140x140 + SS shoes	no	2	
3.5	Resin anchors M16, hangers, bolts	item	1	
4	GLAZED ROOF			
4.1	8+8 HS laminated solar-control glass	m²	17.4	

Item	Description	Unit	Qty	Rate
4.2	Alu glazing bars, cappings, flashings	m	32	
4.3	Alu box gutter + RWP	m	4.4	
4.4	Motorised under-glass textile shade (option)	m²	15.8	
5	OUTDOOR KITCHEN			
5.1	Block carcass + render, 4.0 m	m	4.0	
5.2	Sintered stone worktop 20 mm	m	4.0	
5.3	Built-in gas grill 800, side burner, sink + tap	item	1	
5.4	Outdoor fridge 600, SS doors & drawers	item	1	
5.5	Water, waste, gas & power services	item	1	
6	PAVING			
6.1	Tumbled travertine 30 mm French pattern on mortar	m²	52.1	
7	LIGHTING & POWER			
7.1	Pendants x2, under-counter LED, uplights	item	1	
8	PLANTER (as Design A) + herbs	m	8.4	
9	CONTINGENCY	%	10	

COURTYARD — PROPOSAL C

Timber garden room & outdoor kitchen — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE	
Proposal C — schedules & bill of quantities	
SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	QUANTITIES

Glass supplier to confirm panel build-up, heat-soak and fixings; kitchen appliances to client selection (allow cut-outs per manufacturer).

DRAWING No. REV

C-600C01

PROPOSAL D — GREEN CANOPY, WATER & LIVING WALL

Sedum-roofed bronze canopy, raised reflecting pool fed by rain chains, a living wall and permeable paving that harvests rainwater for irrigation.

AXONOMETRIC FROM SOUTH-EAST (east wall cut away at 1.0 m) — NTS



CONCEPT
A sustainable, cooling courtyard: every drop of rain is either stored (2000 L tank), reused (living wall, planter, pool top-up) or infiltrated through permeable paving. The canopy carries an extensive sedum roof seen from the house above; rain chains turn storms into a feature.

KEY FEATURES

- 4.3 x 3.6 m canopy, 3 slim bronze posts, sedum roof, white soffit with downlights.
- Raised reflecting pool 600 x 3600 with seat-height coping and weir.
- Living wall beside D01; drip-fed from harvested rain.
- Permeable herringbone paving (no gullies), fire bowl lounge.

DRAWING REGISTER

No.	Title
D-000	Cover, concept & register
D-100	General arrangement plan 1:50
D-101	Green roof & structure plan 1:25
D-200	Elevation A 1:25
D-300	Section A-A (N-S) 1:25
D-500	Details 1:10
D-600	Schedules & BOQ

COMPARISON WITH DESIGN A

Criterion	Design A	Prop. D
Roof	Membrane	Sedum green roof
Water	Gullies to drain	SuDS + 2000 L reuse
Biodiversity	Planter	Roof + wall + pool
Cooling	Shade	Shade + evap.
Posts	2 timber-clad	3 slim CHS
Cost class	€€	€€€
Maintenance	Low	Medium (pump, wall)
Load on façade	Ledger	Ledger

COURTYARD — PROPOSAL D

Green canopy, water & living wall — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction



DRAWING TITLE

Proposal D — cover, concept & drawing register

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

D-000 C01

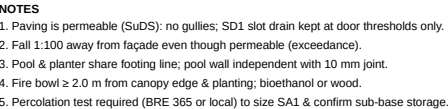

Green canopy, water & living wall — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

Proposal D — general arrangement plan

SCALE @ A3	DATE
:50	06.10.2026
DRAWN / CHECKED	SERIES
PC / —	ARCHITECTURAL


DRAWING No

REV

D-100

C01

1 GENERAL ARRANGEMENT PLAN
D-100 1:50 @ A3

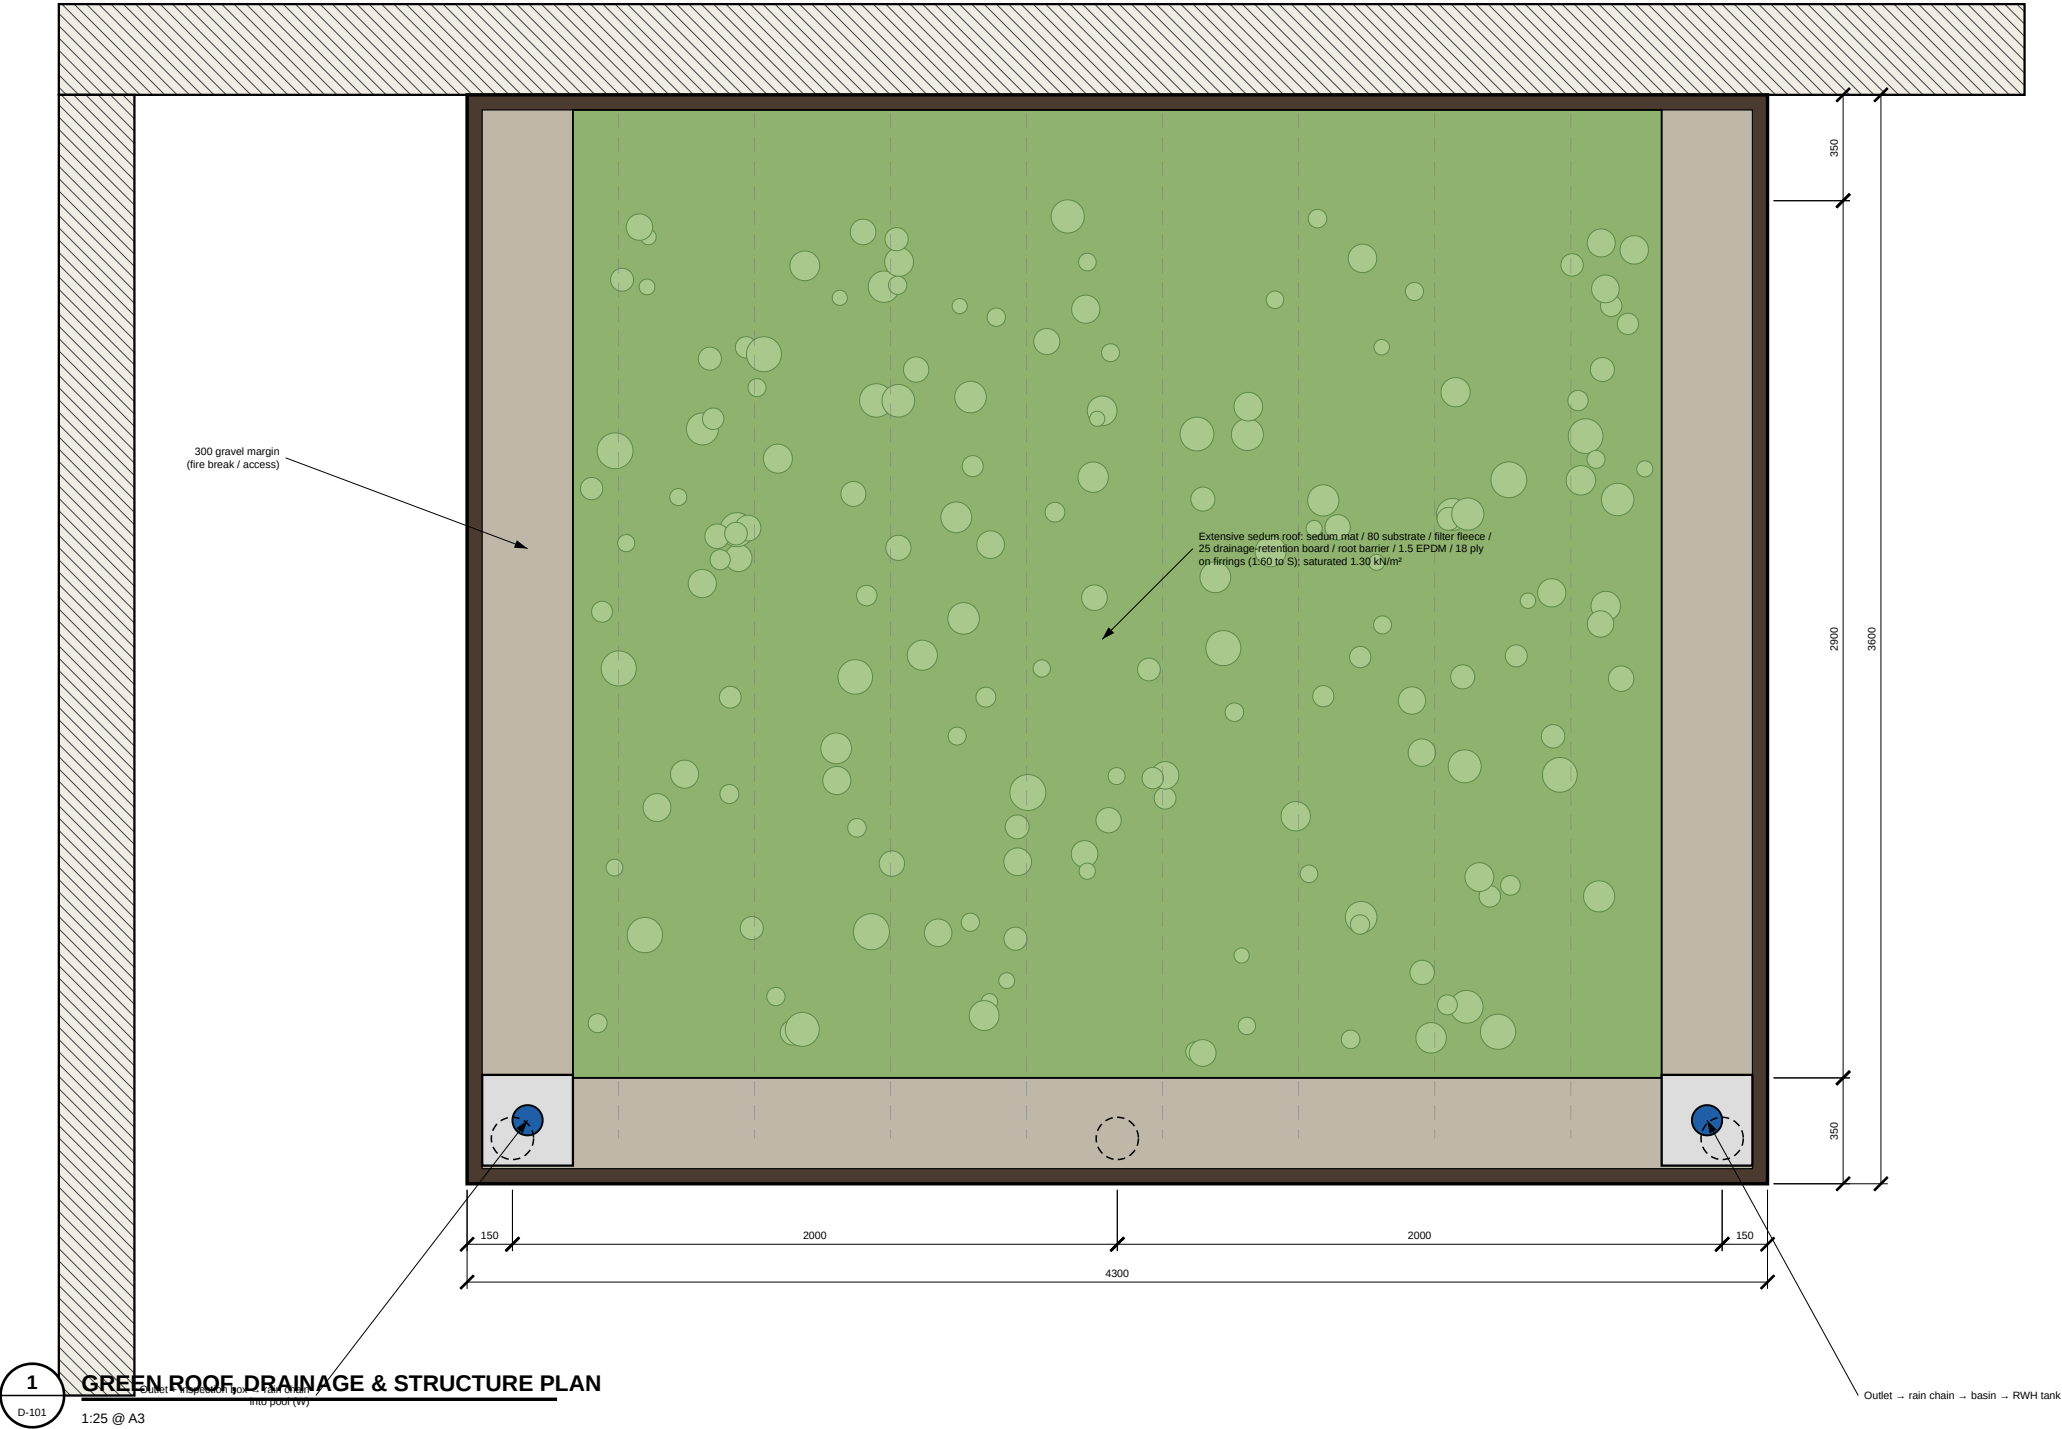

COURTYARD — PROPOSAL D

Green canopy, water & living wall — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
1. Do not scale from this drawing. Use figured dimensions only.
 2. All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
 5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 6. Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE
Proposal D — green roof & structure plan

SCALE @ A3 1:25	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. REV

D-101 C01

COURTYARD — PROPOSAL D

Green canopy, water & living wall — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction


DRAWING TITLE

Proposal D — elevation A (looking north)


SCALE @ A3	DATE
1:25	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

D-200 C01

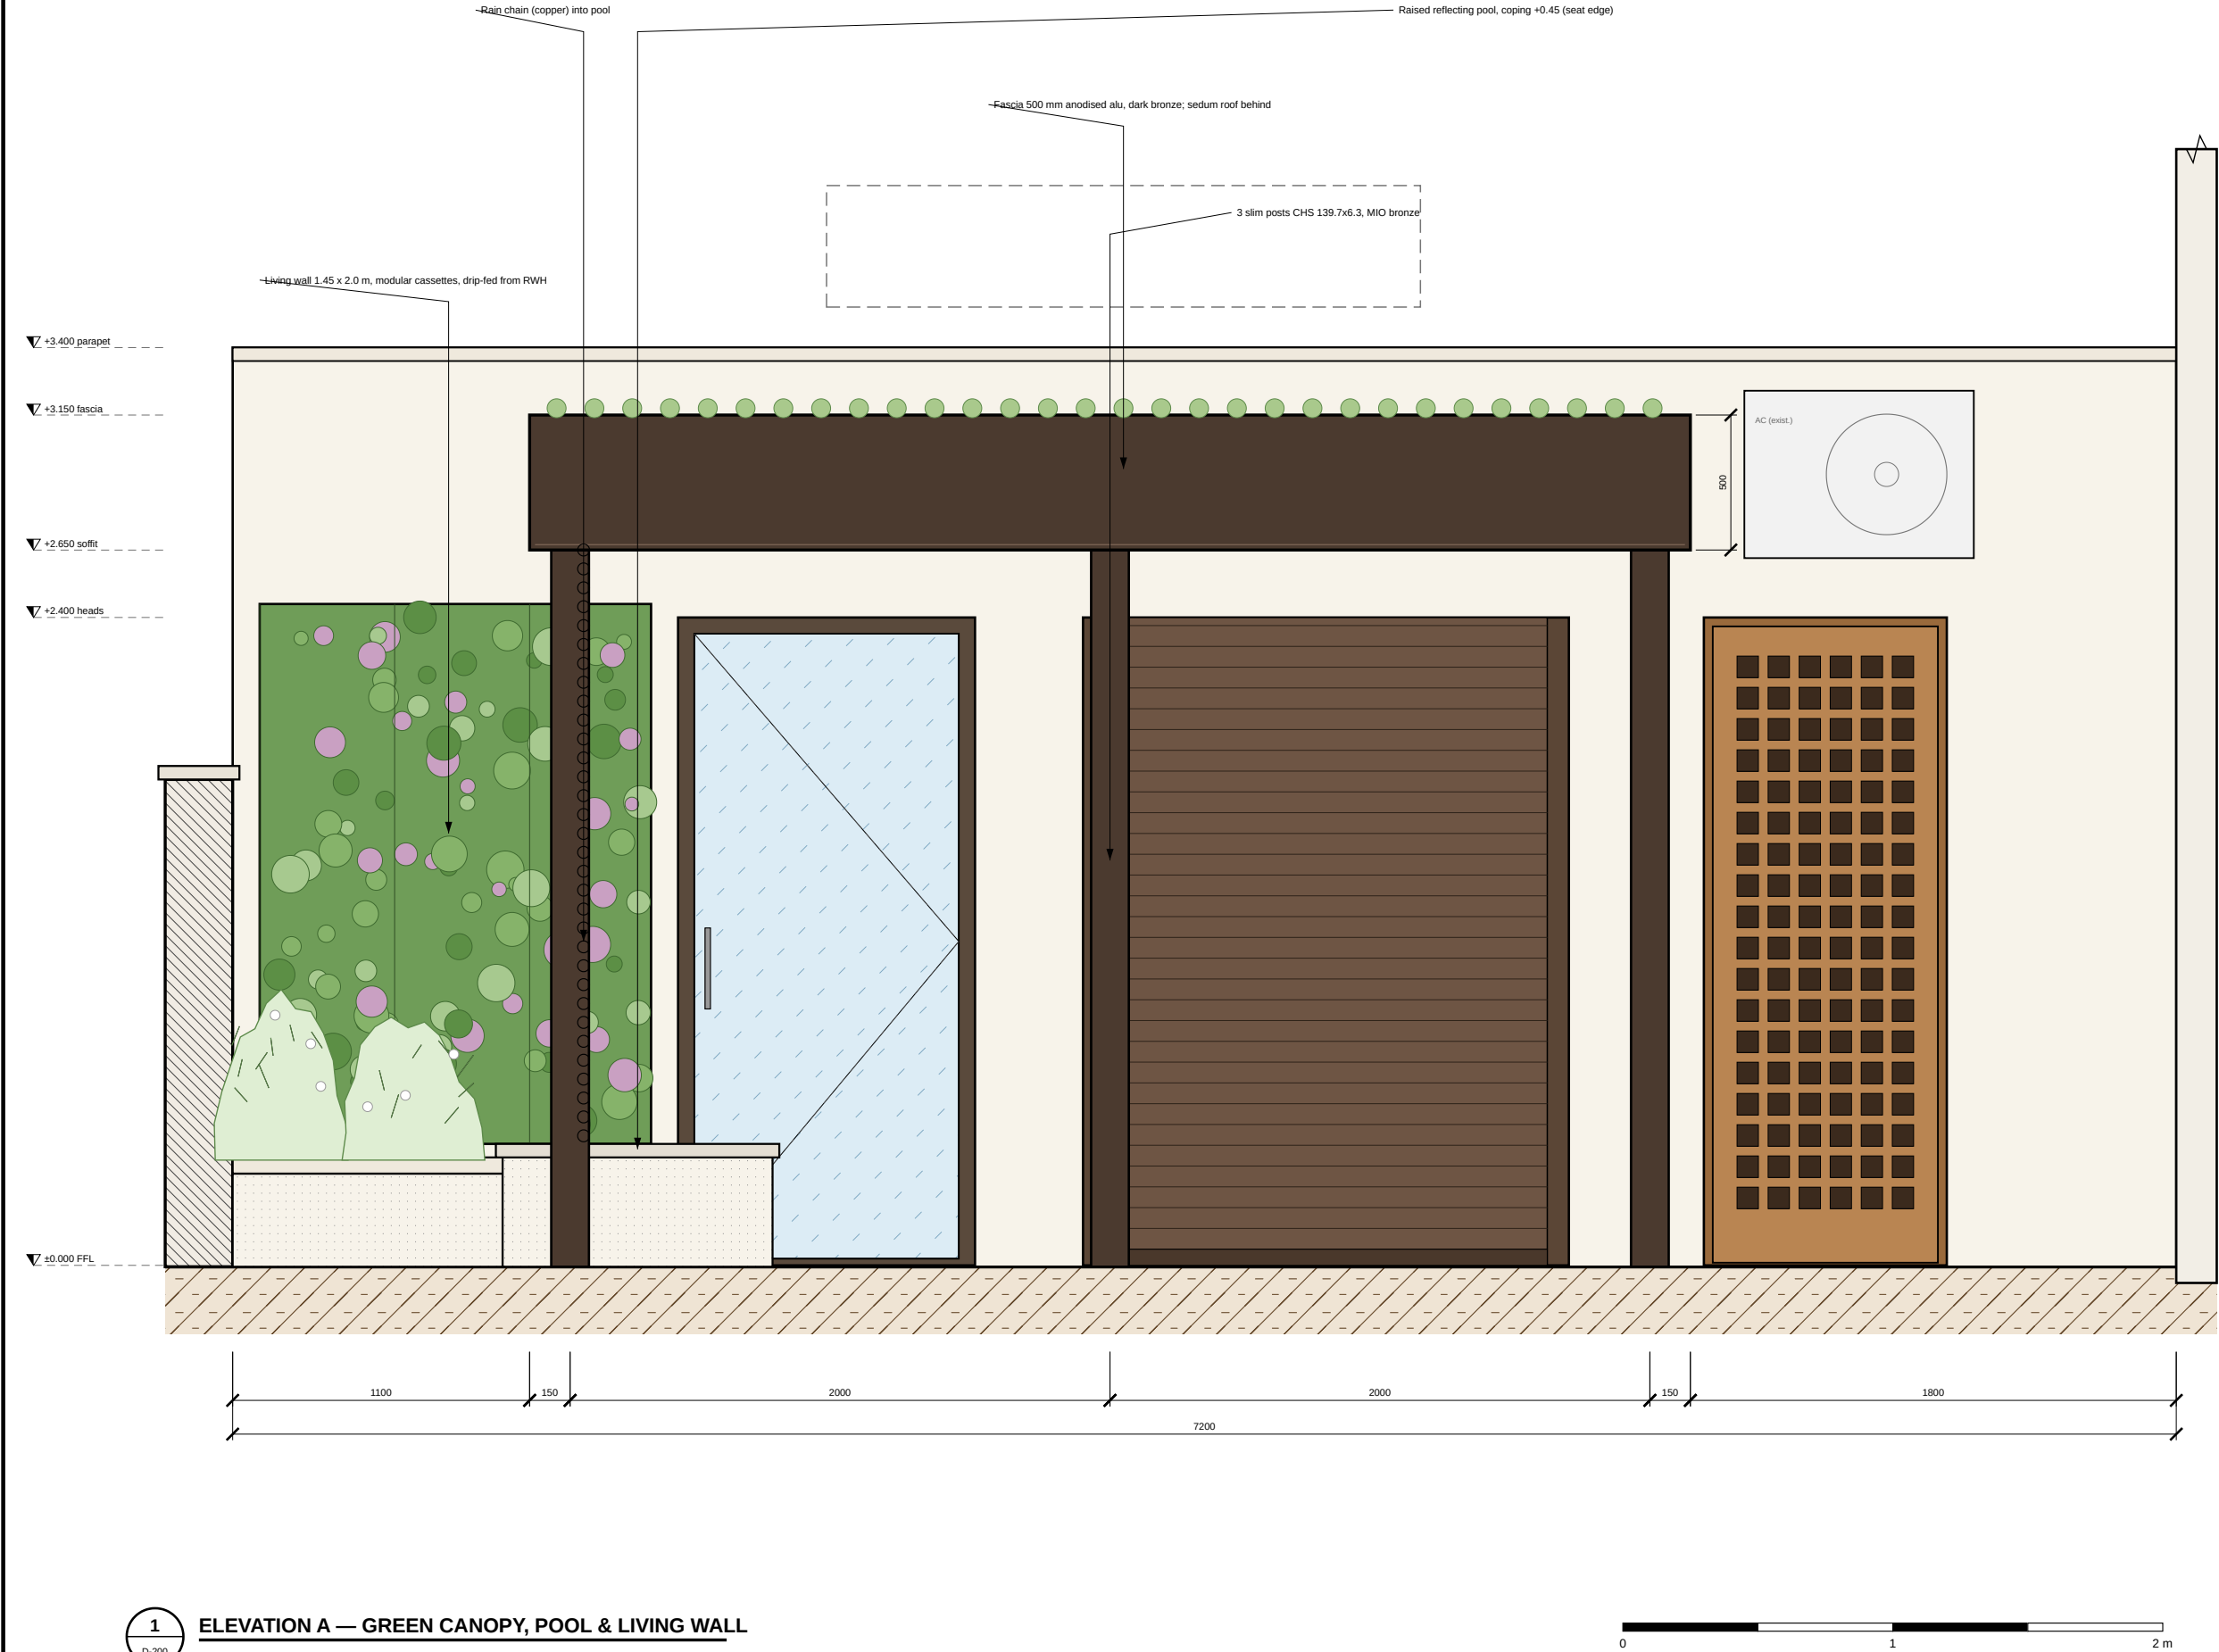

1 ELEVATION A — GREEN CANOPY, POOL & LIVING WALL
D-200 1:25 @ A3



COURTYARD — PROPOSAL D

Green canopy, water & living wall — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)


DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE
Proposal D — section A-A (N-S at X = 1500)


SCALE @ A3 1:25	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. REV


D-300 C01

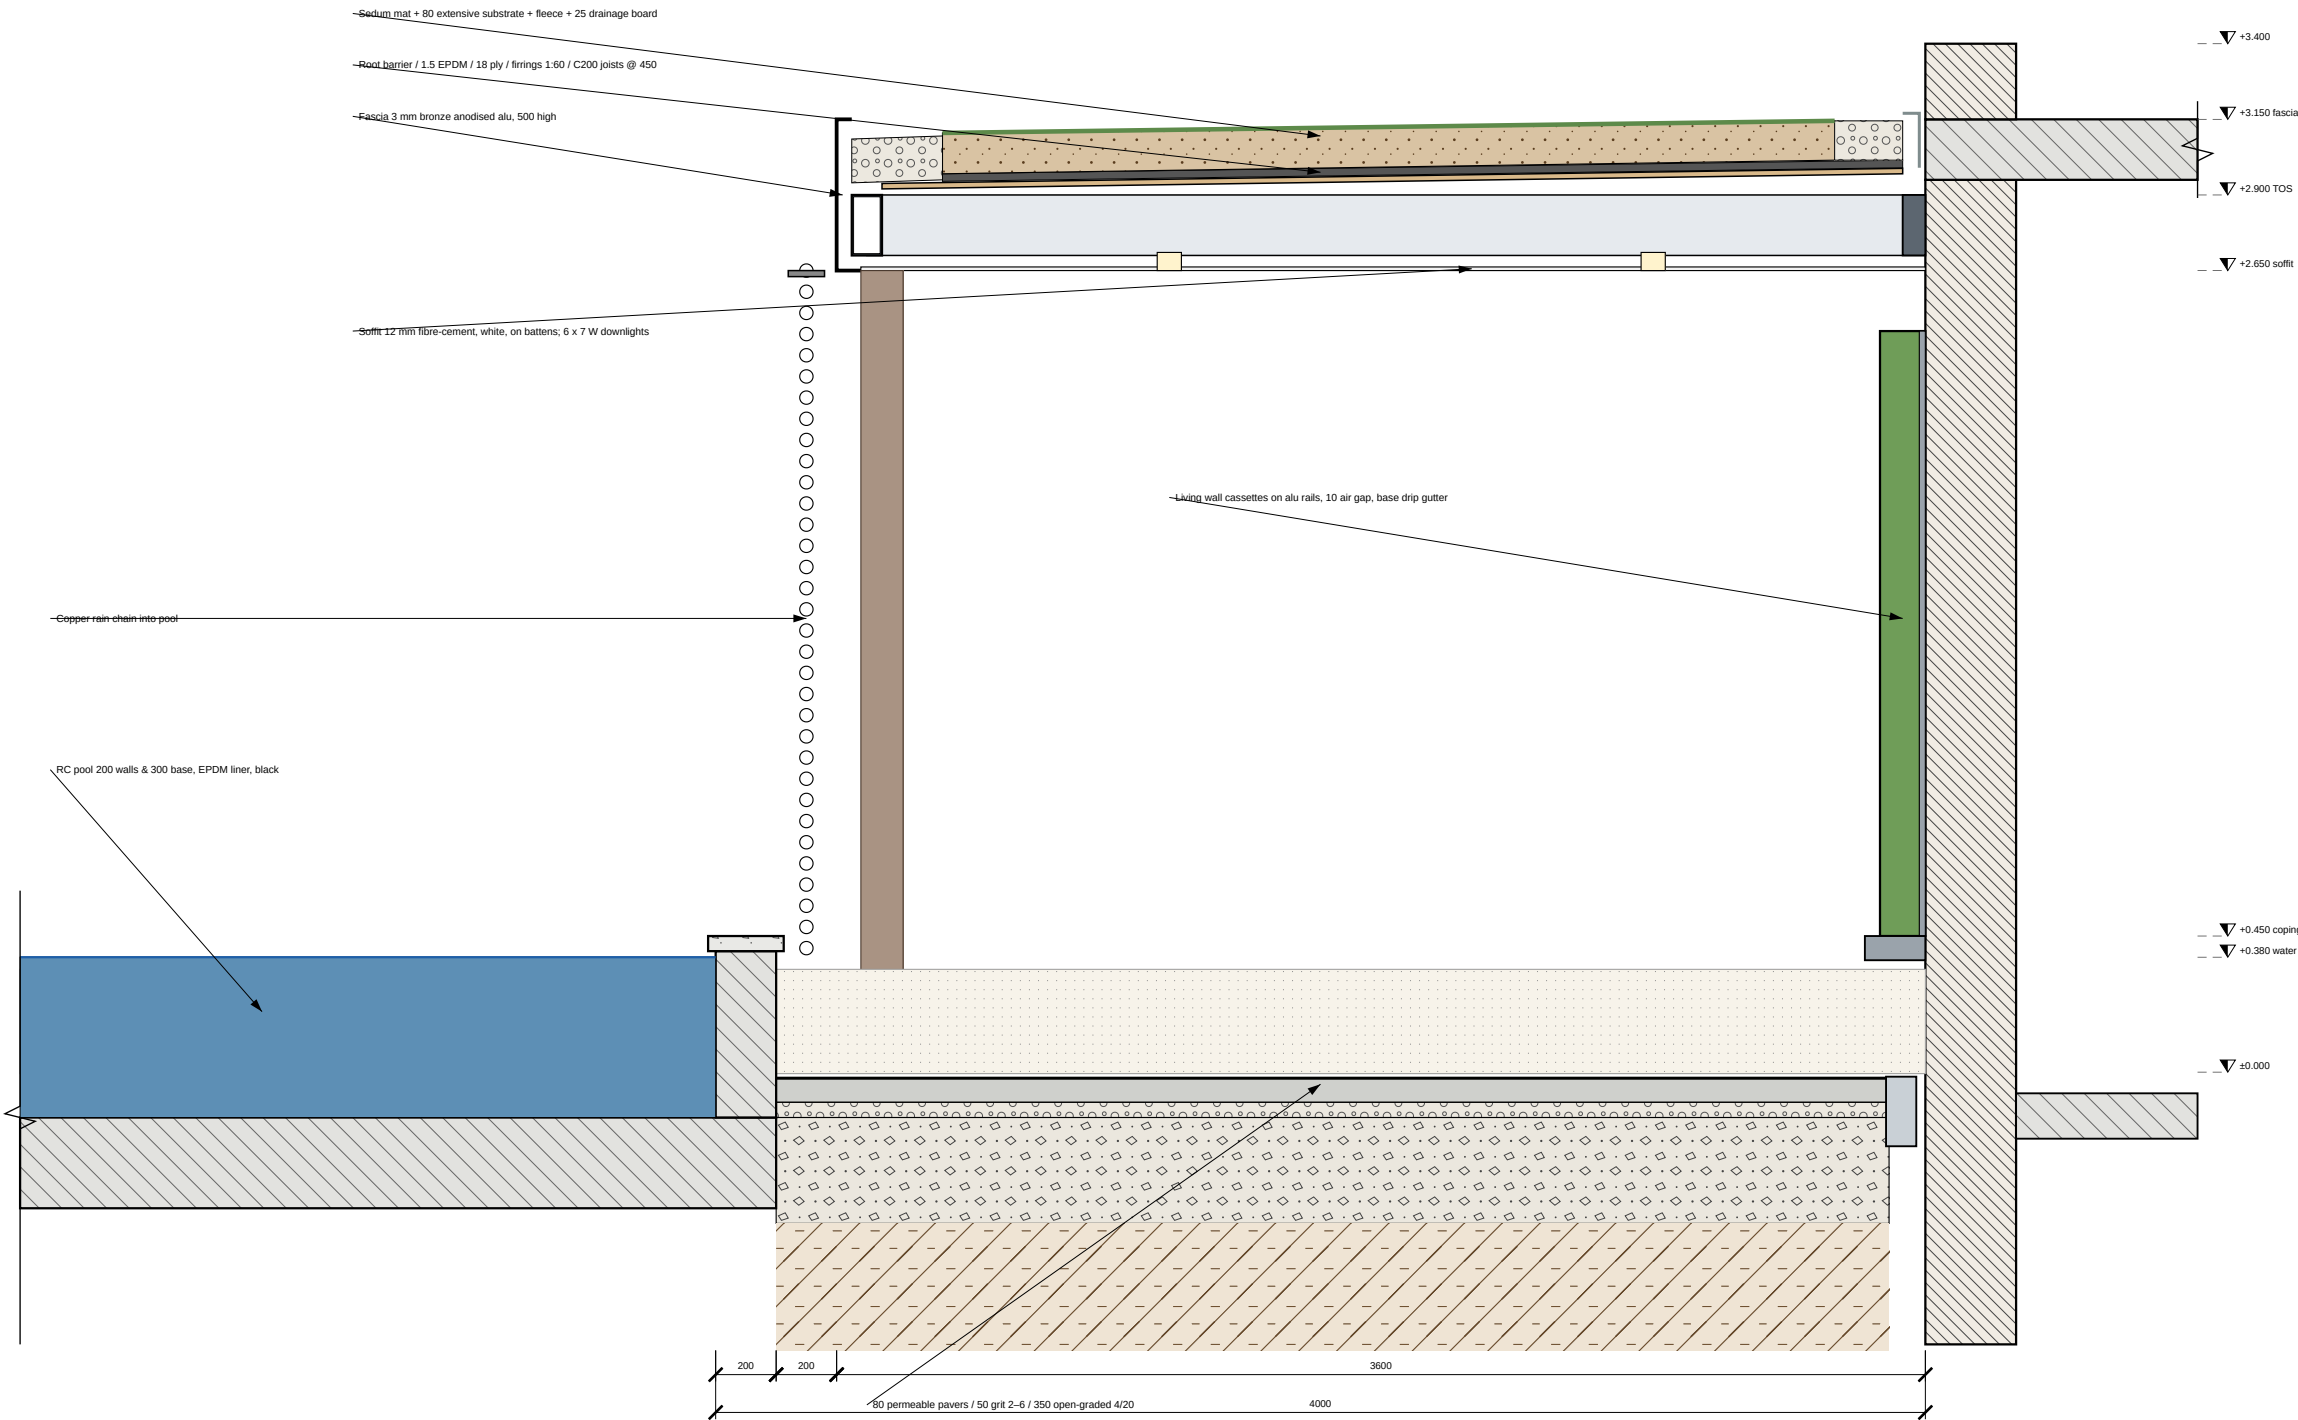


1 SECTION A-A
1:25 @ A3 through living wall, green roof & pool, looking west




DD1 RAISED POOL WALL & COPING — 1:10

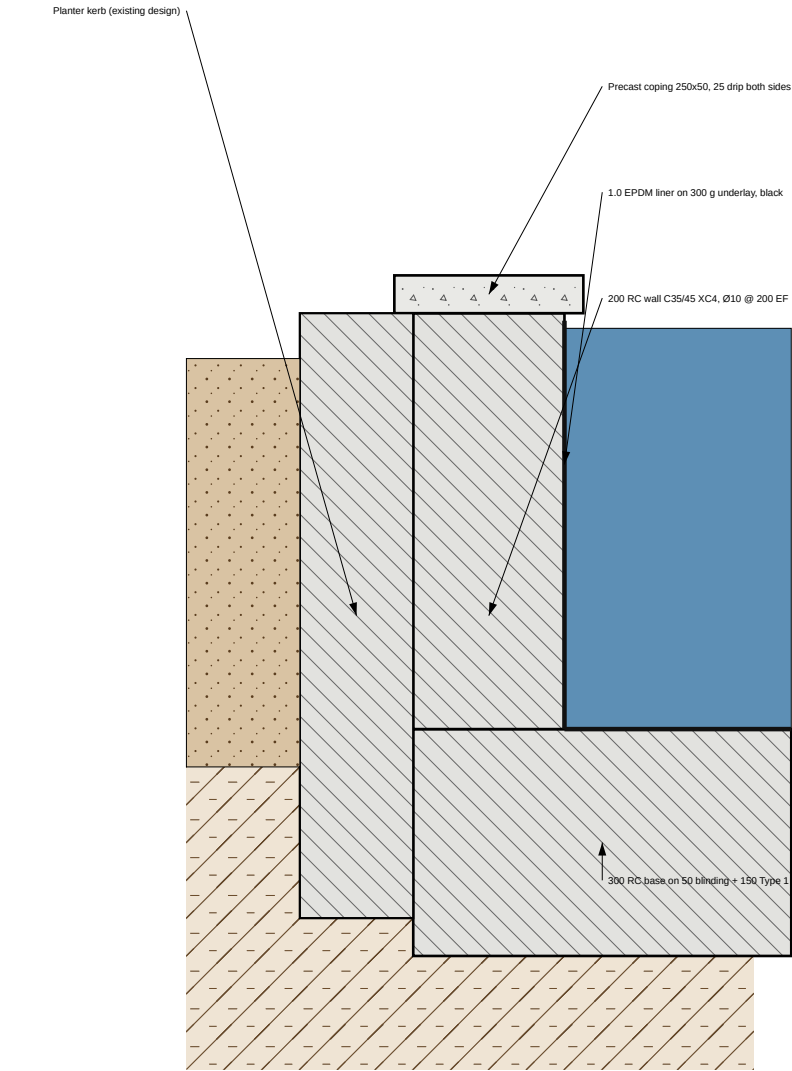

DD3 PERMEABLE PAVING (SuDS) — 1:10

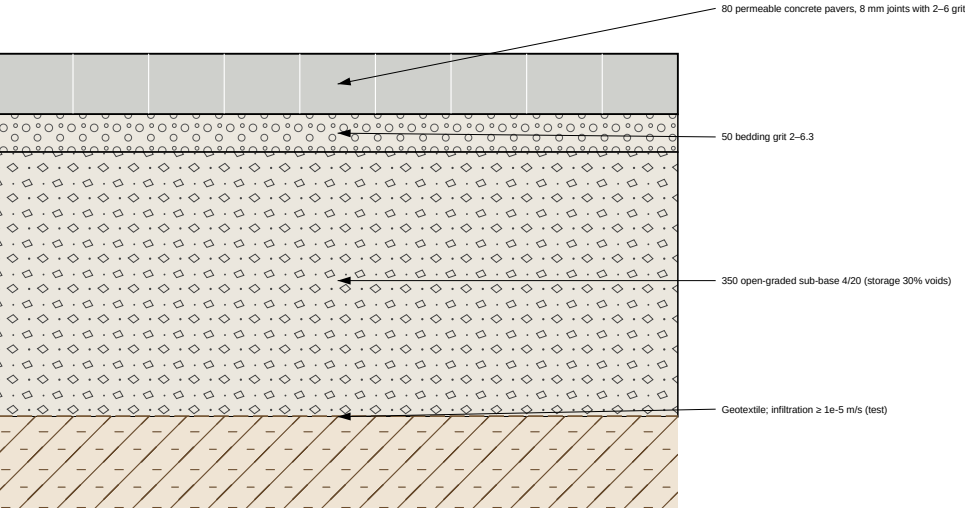

DD2 LIVING WALL — 1:20

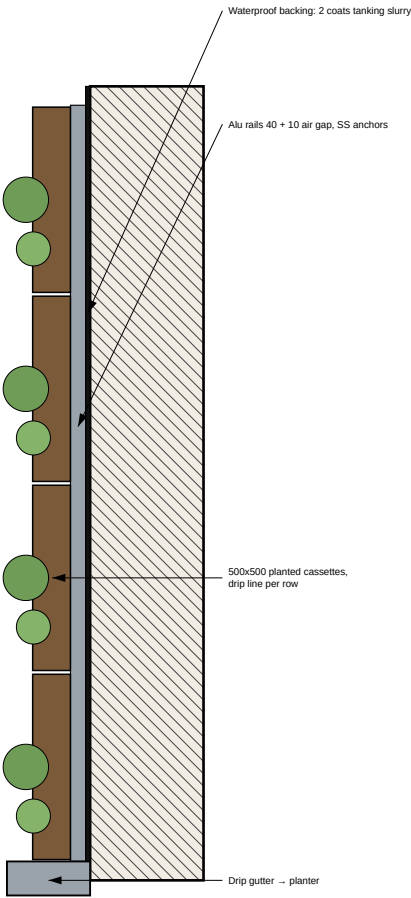

WATER SYSTEMS

- Pool: 600 x 3600, water depth 530; submersible pump 3 m³/h + 9 W UV clarifier + skimmer box; weir blade at N end; overflow at +0.40 to soakaway; mains top-up via float valve + RPZ backflow.
- Rain chains: 2 no. copper; W into pool, E into gravel basin → RWH tank.
- RWH tank: 2000 L flat underground, inlet filter, calmed inlet, 0.5 kW pump, controller; feeds living wall, planter drip & pool top-up; overflow to SA1 soakaway.

GREEN ROOF

- FLL / GRO code; sedum mix ≥ 8 species; 300 gravel margins & around outlets; inspection 2x/yr.
- Saturated load 1.30 kN/m² → joists C200 @ 450, beams as A + front beam RHS 200x100 on 3 CHS posts.

STRUCTURE

- Ledger to façade as Design A (survey). Posts CHS 139.7x6.3 on 250 base plates, pads 600x600x700.
- ULS = 4.1 kN/m²; front beam spans 2.0 m — trivial; joists 3.3 m @ 450 M = 2.5 kNm.

COURTYARD — PROPOSAL D

Green canopy, water & living wall — alternative to Design A (same courtyard, existing doors retained)

Client: Owner / Client

Design & drawings: Claude Code

DRAWING NOTES

- Do not scale from this drawing. Use figured dimensions only.
- All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
- Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
- Read with all other architectural, structural & services drawings and the specification notes (A-001).
- Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
- Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE

Proposal D — details

SCALE @ A3 1:10	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. REV

D-500

C01

Item	Description	Unit	Qty	Rate
1	PRELIMINARIES & SURVEY			
1.1	Survey, percolation test, set-up	item	1	
2	GROUNDWORKS			
2.1	Excavate for permeable build-up (0.5 m)	m³	26.0	
2.2	RWH tank 2000 L excavation & install	item	1	
2.3	Post pads 600x600x700	no	3	
3	CANOPY STRUCTURE			
3.1	Steel frame HDG (ledger, beams, C200 @ 450)	t	0.75	
3.2	CHS 139.7x6.3 posts, MIO bronze	no	3	
3.3	Ply deck, firings, EPDM, flashings	m²	15.5	
3.4	Green roof system (sedum, substrate, layers)	m²	11.1	
3.5	Bronze fascia 500 mm	m	11.5	
3.6	Fibre-cement soffit + 6 downlights	m²	15.5	

Green roof & living wall by specialist (design & install, 2-year maintenance). Pool pump/UV sized by supplier.

Item	Description	Unit	Qty	Rate
3.7	Outlets, inspection boxes, 2 copper rain chains	item	1	
4	WATER FEATURE			
4.1	RC raised pool incl. liner, coping	item	1	
4.2	Pump, UV, weir, skimmer, lighting 2 x 12 V	item	1	
5	LIVING WALL			
5.1	Modular living wall 1.45 x 2.0 incl. plants	m²	2.9	
5.2	Irrigation controller & dosing	item	1	
6	PAVING			
6.1	Permeable pavers 80 herringbone + border	m²	52.1	
6.2	Open-graded sub-base 350 + grit 50 + geotextile	m²	52.1	
7	PLANTER (as A) & FIRE BOWL (FF&E)	item	1	
8	ELECTRICAL	item	1	
9	CONTINGENCY	%	10	

COURTYARD — PROPOSAL D

Green canopy, water & living wall — alternative to Design A (same courtyard, existing doors retained)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

DESIGN PROPOSAL — developed design, buildable; confirm by survey & engineer before construction

DRAWING TITLE

Proposal D — schedules & bill of quantities

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	QUANTITIES

DRAWING No.

REV

D-600

C01