


COURTYARD CANOPY & GARDEN TERRACE

Construction drawing set — Design A (as client renders): timber-soffit steel canopy, raised planter, 3-tone paving, lattice joinery

AXONOMETRIC VIEW FROM SOUTH-EAST (east wall & screen shown cut away at 1.0 m) — NTS

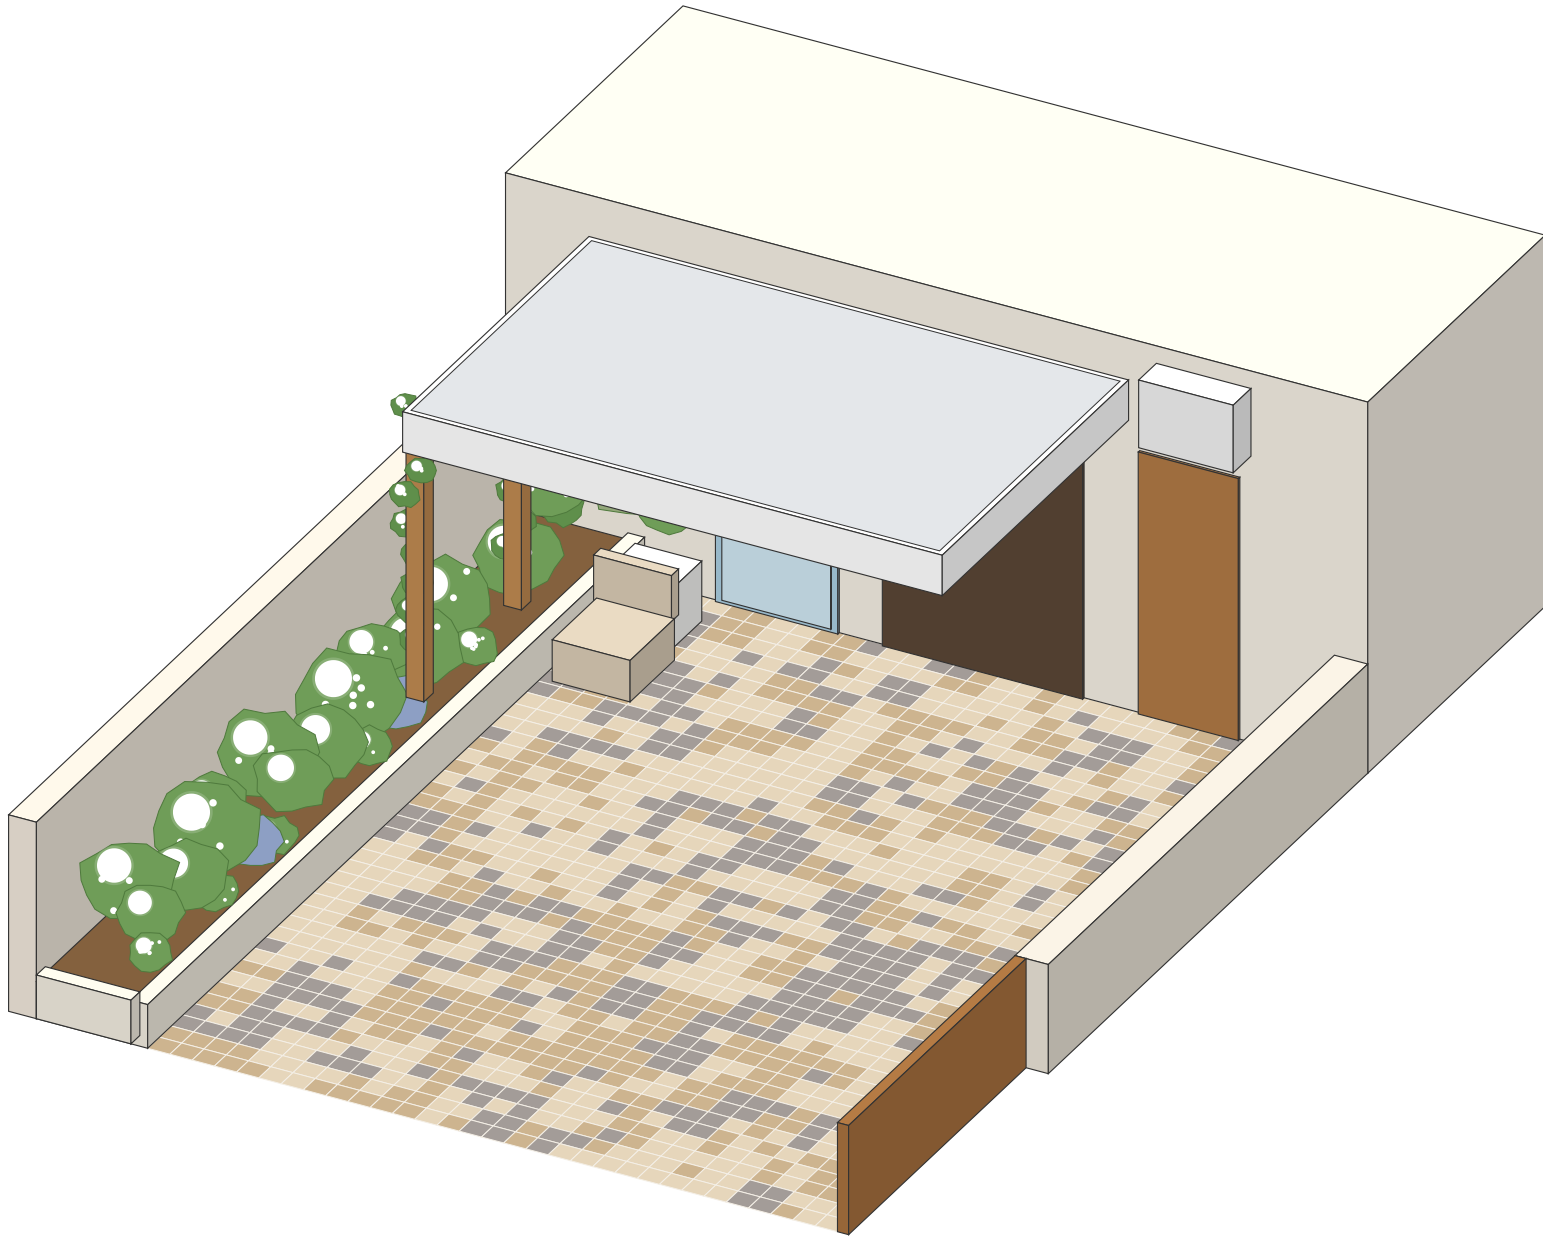

PROJECT SUMMARY

- Canopy: 4.85 x 3.15 m flat steel canopy, 370 mm white aluminium fascia, thermo-ash slatted soffit with perimeter warm-white LED, membrane roof draining through post P1.
- Structure: galvanised steel frame (UPN ledger, RHS beams, lipped-C joists) on 2 timber-clad posts; east corner by cantilever S1 (as render) or post P3 S2 (recommended where existing structure is unverified).
- Planter: 8.4 m long x 1.0 m raised RC planter, rendered, precast coping, drip irrigation, star jasmine & Mediterranean shrubs, 6 uplights.
- Paving: 52.1 m² 200x200 concrete pavers in 3 tones, cross-falls to 2 gullies + threshold slot drain.
- Joinery: glazed alu door D01, roller shutter D02, timber lattice door D03, lattice screen & gate G01.

STATUS

Issued for construction / tender, subject to: (1) measured & level survey, (2) structural engineer's design & sign-off, (3) any planning/building permit required locally, (4) utility survey before digging.

DRAWING REGISTER

No.	Title
A-000	Cover sheet, drawing register & project information
A-001	General notes, assumptions & outline specification
A-002	Construction sequence, hold points & programme
A-100	Courtyard setting-out & general arrangement plan 1:50
A-101	Paving layout, levels & surface water drainage plan 1:50
A-102	Canopy roof plan — falls, gutter & membrane 1:25
A-103	Reflected ceiling plan, lighting & power 1:25 / 1:100
A-104	Planting & irrigation plan 1:25
A-200	Elevation A — annex façade & canopy 1:25
A-201	Elevations B & C 1:50
A-300	Section A-A — canopy, threshold & paving 1:20
A-301	Section B-B — planter, canopy & courtyard 1:25
A-302	Section C-C planter; slot drain, gully & edge details 1:10
A-500	Details 1 — post base, corner, eave & façade junction
A-501	Details 2 — LED, soffit, back-span, fascia & wires
A-600	Door & screen schedule, elevations & joinery
S-001	Structural design basis, loads & member checks
S-100	Canopy steel framing plan 1:25
S-101	Connections, foundation plan & member schedule
Q-001	Bill of quantities

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)

Client: Owner / Client

Design & drawings: Claude Code

DRAWING NOTES

- Do not scale from this drawing. Use figured dimensions only.
- All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
- Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
- Read with all other architectural, structural & services drawings and the specification notes (A-001).
- Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
- Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

Cover sheet, drawing register & project information

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

A-000

C01

1 GENERAL

- 1.1 These drawings define a buildable design derived from the client's concept renders. Dimensions marked existing are assumed and MUST be verified by a measured survey before fabrication.
- 1.2 Datum ±0.000 = internal finished floor level at D01. All levels in metres, dimensions in mm.
- 1.3 Work to comply with local building regulations, Eurocodes (EN 1990/1991/1993/1995/1992) or local equivalent, manufacturers' instructions and good practice.
- 1.4 The contractor is responsible for temporary works, propping, setting out and site safety.
- 1.5 Hold points (H) require designer / engineer inspection before proceeding — see A-002.

2 KEY ASSUMPTIONS (VERIFY)

- 2.1 Courtyard 7.20 x 8.40 m between boundary wall and house wall; façade straight & plumb ±10 mm.
- 2.2 Annex façade has an RC ring beam / lintel at +2.40 to +2.95 suitable for M12 resin anchors (else: through-bolts with backing plates or independent post line — consult engineer).
- 2.3 Ground: firm natural soil, allowable bearing ≥ 100 kPa at -0.90; no services in footing zones.
- 2.4 Snow 1.0 kN/m², peak wind pressure 0.70 kN/m² (sheltered courtyard). Adjust to site.
- 2.5 Existing walls are sound; boundary wall ownership/party-wall consent confirmed by client.

3 DEMOLITION & PREPARATION

- 3.1 Remove existing paving / topsoil in work area to formation (-0.25 under paving, -0.30 in planter).
- 3.2 Protect façade, doors, AC units & solar heater pipework; isolate external circuits.
- 3.3 Locate & mark all buried services (CAT scan) before excavation.

4 CONCRETE

- 4.1 Footings C25/30 XC2, kerb upstand C30/37 XC4/XF1, blinding C12/15. Max aggregate 20 mm, S3.
- 4.2 Reinforcement B500B, cover 50 (cast against blinding 40), 40 for kerb. Laps 50Ø.
- 4.3 Cure 7 days min; no loading of pads before 7 days / 70 % strength.

5 STRUCTURAL STEEL — see S-001

- 5.1 Fabrication to EN 1090-2 EXC2, CE marked; shop drawings to engineer for approval before fabrication.
- 5.2 All steel hot-dip galvanised; visible posts (Option B) duplex coated RAL 9010.

6 ROOFING

- 6.1 18 mm marine ply (EN 636-3) on C24 tapered firrings; 1.5 mm TPO fully bonded; 150 upstands.
- 6.2 Gutter/outlet/overflow per A-102 & D3; 24 h flood test (H).

7 CARPENTRY & SOFFIT

- 7.1 Thermo-ash (or WRC) 68x20 slats @ 78 pitch on 50x38 battens; oil finish all faces pre-fixing.
- 7.2 Post cladding 20 mm boards, mitred, SS fixings, 30 mm gap above base plate.

8 METALWORK & FASCIA

- 8.1 3 mm aluminium fascia/capping, RAL 9010 matt, concealed fixings; bimetallic isolation.

9 MASONRY / RENDER

- 9.1 Kerb external faces: 2-coat render 15 mm, cream masonry paint (sample panel 1 m² for approval).
- 9.2 Boundary wall & façade: repair cracks, 1 coat stabiliser + 2 coats acrylic masonry paint.

10 PAVING & DRAINAGE — see A-101 / A-302

- 10.1 200x200x60 pavers, 3 tones laid to colour map; Type 1 sub-base 150; falls 1:80 / 1:60.
- 10.2 SD1 slot drain, G1/G2 gullies, Ø110 PVC-U SN8 to soakaway/SW drain; CCTV or air test before backfill.

11 SOFT LANDSCAPE & IRRIGATION — see A-104

- 11.1 Topsoil BS 3882 + compost; plants to schedule; 12-month establishment & replacement.
- 11.2 Drip irrigation with controller, backflow protection & rain sensor.

12 ELECTRICAL & LIGHTING — see A-103

- 12.1 Licensed electrician; RCBO protection; IP65+ fittings; test certificate on completion.

13 JOINERY — see A-600

- 13.1 D01 alu glazed door, D02 insulated roller shutter, D03 lattice door, G01 screen/gate.

14 TOLERANCES

- 14.1 Steel: ±3 mm positions, ±2 mm levels at bearings. Fascia line ±3 mm over 3 m.
- 14.2 Soffit plane ±3 mm / 3 m, slat gaps 10 ±1 mm. Paving ±3 mm / 3 m.

15 MAINTENANCE

- 15.1 Gutter & outlet: clean every 3 months (needles from pines!). Re-oil timber 2–3 yrs.
- 15.2 Inspect membrane & sealants annually; prune vines off membrane; flush drip lines each spring.

16 OPTIONS

- OPT-A posts timber-clad (render 1) | OPT-B posts white SHS 150 (render 2)
- S1 cantilever east corner (as render) | S2 post P3 (lower cost, no work to existing structure)

ABBREVIATIONS

BOS bottom of steel · TOS top of steel · FFL finished floor level · HDG hot-dip galvanised · RWP rainwater pipe · S.O. structural opening · MJ movement joint · c/c centres · FP fin plate · PL plate · TBM temporary bench mark · SW surface water · FF&E furniture, fixtures & equipment.

MATERIAL & COLOUR SCHEDULE

Element	Material	Finish
Fascia / capping	Alu 3 mm	RAL 9010 matt
Soffit / cladding	Thermo-ash	Natural oil
Posts Opt-B	Steel duplex	RAL 9010
D01 frame	Aluminium	RAL 8019 / bronze
D02 shutter	Aluminium	RAL 8019 matt
D03 / G01	Thermo-ash / iroko	Teak-tone oil
Kerb & walls	Render + paint	Warm white / cream
Coping	Precast recon. stone	Cream / sand
Pavers S	Concrete	Sand / cream
Pavers B	Concrete	Buff / beige
Pavers G	Concrete	Grey-taupe
Grates	Stainless / DI	Satin / black
LED	24 V strip	2700 K, CRI 90



RAL 9010




Thermo-ash



RAL 8019



Lattice



Render



Paver S



Paver B



Paver G

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

General notes, assumptions & outline specification

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

A-001C01

#	Stage	Work	Hold point / QA	Dur.
1	Survey & approvals	Measured + level survey; structural survey of annex (slab, ring beam, pier); utility scan; engineer confirms S1 or S2; shop drawings approved.	H1 survey review	1 wk
2	Ordering	Steel (2–3 wk), D01/D02 (4–6 wk), joinery D03/G01 (3–4 wk), pavers (1–2 wk), plants.	Samples approved	—
3	Site set-up & strip	Protect façade/doors/AC; strip paving & topsoil to formation; set TBM.		2 d
4	Excavate & drainage	Dig footings, kerb trench, gully & pipe trenches; lay Ø110 drains, IC1, SA1.	H2 formation & drains test	3 d
5	Concrete 1	Blinding; pads F1/F2 with cast-in RWP bend; kerb strip footing; HD bolts by template.	H3 rebar & bolt positions	2 d
6	Concrete 2	Pedestals; kerb upstand (MJ @ 4.2 m); cure 7 days.	H4 kerb line & level	2 d
7	Steel erection	Ledger anchors (pull-test 3 no.); posts plumb & grout; beams, joists; bolts torqued.	H5 steel inspection	2 d
8	Roof	Firrings, ply deck, gutter, outlet, TPO, flashings; overflow.	H6 24 h flood test	3 d
9	1st fix services	LED/downlight cabling in void, conduit through façade, drivers in utility; irrigation header sleeve.	H7 1st fix inspection	1 d
10	Soffit & fascia	Battens, insect fleece, LED profiles, slats; fascia/capping; post cladding.	Mock-up 1 m² approved	4 d
11	Planter	Tanking, drainage sheet, gravel, geotextile, topsoil; coping; render & paint.		3 d
12	Paving	Sub-base, slot drain, gullies, bedding, pavers to colour map, jointing, vibrate.	H8 levels & falls	4 d
13	Joinery	Install D01, D02 (motor), D03, G01 screen & gate.		2 d
14	Planting & irrigation	Wires, plants, drip lines, controller, mulch, uplights aimed.		2 d
15	2nd fix & test	Connect fittings, test & certify, program controls; snag; clean.	H9 handover	2 d

PROGRAMME
Indicative site duration ≈ 6–7 weeks after a 4–6 week procurement period (doors are the long lead). Stages 9–14 overlap where trades allow. Weather windows: membrane & concrete not below +5 °C or in rain.

HEALTH & SAFETY
Working at height (canopy at +3.0 m): mobile towers / scaffold with guard-rails, no work from ladders on deck. Lifting: beams ≤ 140 kg (B2 S1 ≈ 380 kg — use hoist / 2-man lift with lifting aid). Excavations > 1.2 m none planned. Silica dust: wet-cut pavers & coping. Electrical: isolate & lock-off; RCD tools.

HANDOVER DOCUMENTS
As-built drawings, steel & galvanising certificates, membrane warranty, electrical certificate, door/motor manuals, irrigation programme, plant list & maintenance schedule (A-001 §15).

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off


DRAWING TITLE

Construction sequence, hold points & programme

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

A-002C01

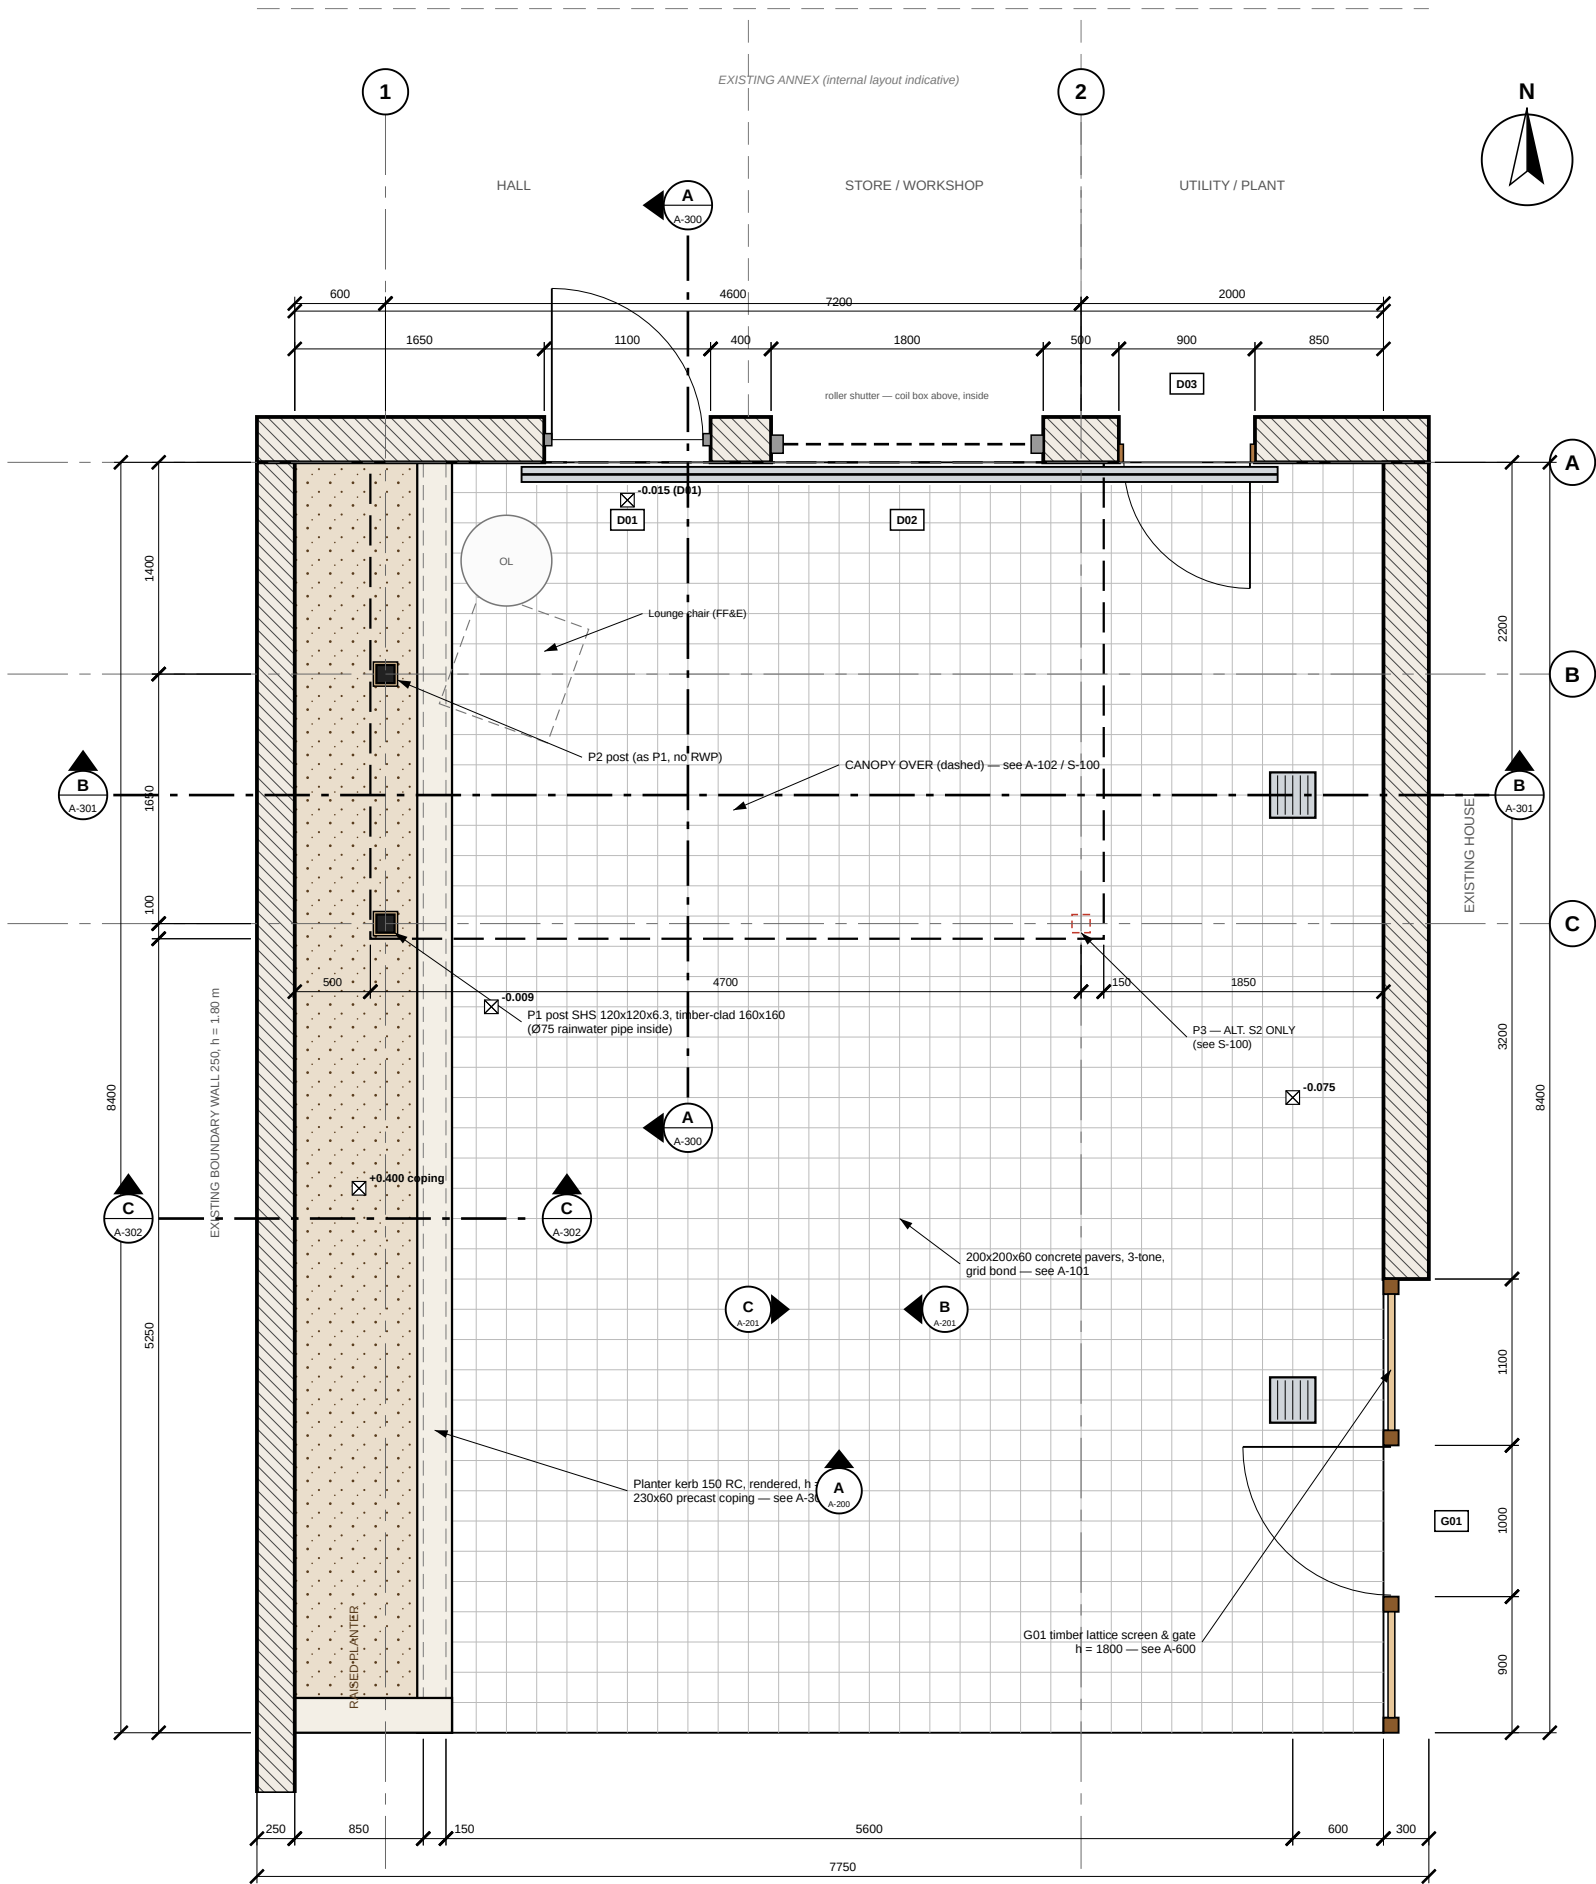

1
A-100
COURTYARD GENERAL ARRANGEMENT PLAN
1:50 @ A3 cut plane +1.20

LEGEND

- Existing masonry wall (cut)
- Planter soil
- Canopy outline above (dashed)
- Steel post (cut)
- Timber cladding / joinery
- Drainage channel / gully

SETTING-OUT NOTES

- Setting-out datum: internal corner of existing boundary wall (W) and annex façade (N) = X0 / Y0.
- Grids 1-2 / A-C are steel centrelines (posts & primary beams).
- Establish TBM ± 0.000 at internal FFL of D01 before excavation.
- Check diagonals of canopy rectangle (4850 x 3150): 5783 mm ± 5 .
- Post P1/P2 holding-down bolts set with plywood template to ± 3 mm.
- Paving grid starts at kerb face X = 1000 and façade Y = 0: full 200 units, no cuts W/E.
- Furniture & potted olive are FF&E (by owner) — shown for coordination only.

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

- Do not scale from this drawing. Use figured dimensions only.
- All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
- Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
- Read with all other architectural, structural & services drawings and the specification notes (A-001).
- Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
- Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

Courtyard setting-out & general arrangement plan

SCALE @ A3

1:50

DRAWN / CHECKED

CC / —

DRAWING No.

A-100

DATE


06.10.2026


SERIES

ARCHITECTURAL

REV

C01




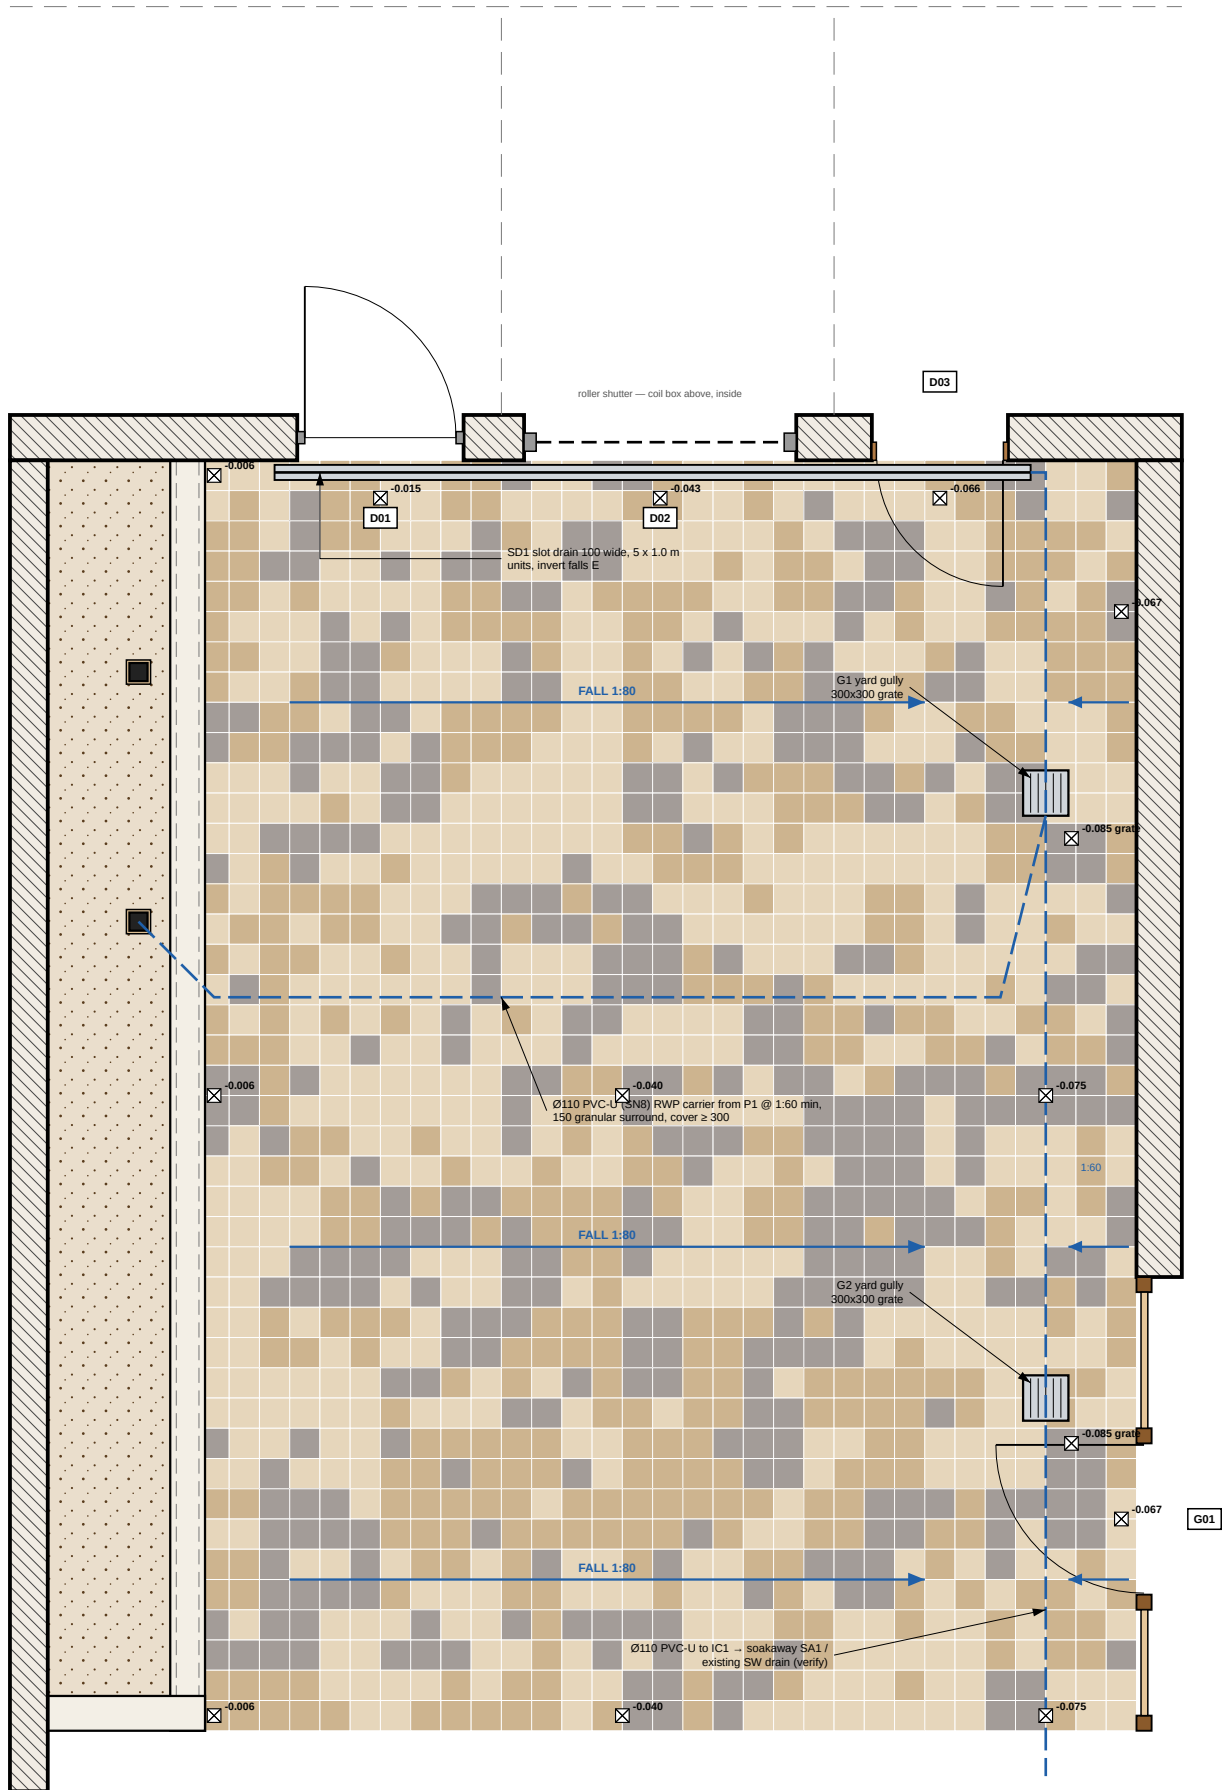

PAVER SCHEDULE (200 x 200 x 60)				
Tone	Colour	No.	Mix	+5% order
S	Sand / cream	556	43%	584
B	Buff / beige	397	30%	417
G	Grey-taupe	349	27%	367
	TOTAL laid	1302	100%	1368

- Area: 52.08 m² — 1302 units, no cut units required (grid fits 31 x 42 exactly; trim only around gullies G1/G2 & slot drain).
- PAVING SPECIFICATION**
- Pavers: vibro-pressed concrete, 200x200x60, EN 1338, class 3/R/I, slip USRV ≥ 45, square aris, through-coloured, 3 tones as schedule (match render: sand / buff / grey-taupe).
 - Lay grid (stack) bond, 3 mm joints, laid from paving plan colour map: lay out dry, photo-approve 4 m² before full laying.
 - Bed: 30 mm sharp sand (EN 13242 0/4) screeded, compacted with plate + rubber mat.
 - Sub-base: 150 mm Type 1 crushed aggregate in 2 layers, 98% MDD; geotextile separator on formation.
 - Jointing: kiln-dried silica sand, brushed & re-vibrated; or polymeric jointing sand (beige).
 - Tolerance: ±3 mm under 3 m straight-edge; lipping ≤ 2 mm.
 - Vehicle use: if D02 is used by a car, upgrade to 80 mm pavers on 250 mm sub-base.
- DRAINAGE**
- SD1: polymer-concrete slot drain, 100 mm, stainless slot, B125, with outlet box at E end.
 - G1/G2: PVC-U yard gully with silt bucket, 300x300 ductile-iron/stainless grate, B125.
 - Pipes: Ø110 PVC-U SN8, 1.60 min, rodding access at every change of direction.
 - P1 rainwater (canopy 15.3 m²) and AC condensate connect to G1 run.
 - Outfall: IC1 Ø450 inspection chamber — SA1 soakaway grate (1.0 m²; ≥ 5 m from buildings) or existing surface-water drain. Percolation test before design is fixed.

1 PAVING, LEVELS & DRAINAGE PLAN
A-101 1:50 @ A3



COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
1. Do not scale from this drawing. Use figured dimensions only.
 2. All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
 5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 6. Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE
Paving layout, levels & surface water drainage plan

SCALE @ A3 1:50	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. REV

A-101 C01

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL +0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary; final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off


DRAWING TITLE


Canopy roof plan — falls, gutter & membrane

SCALE @ A3 1:25	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No.	REV
-------------	-----

A-102	C01
--------------	------------

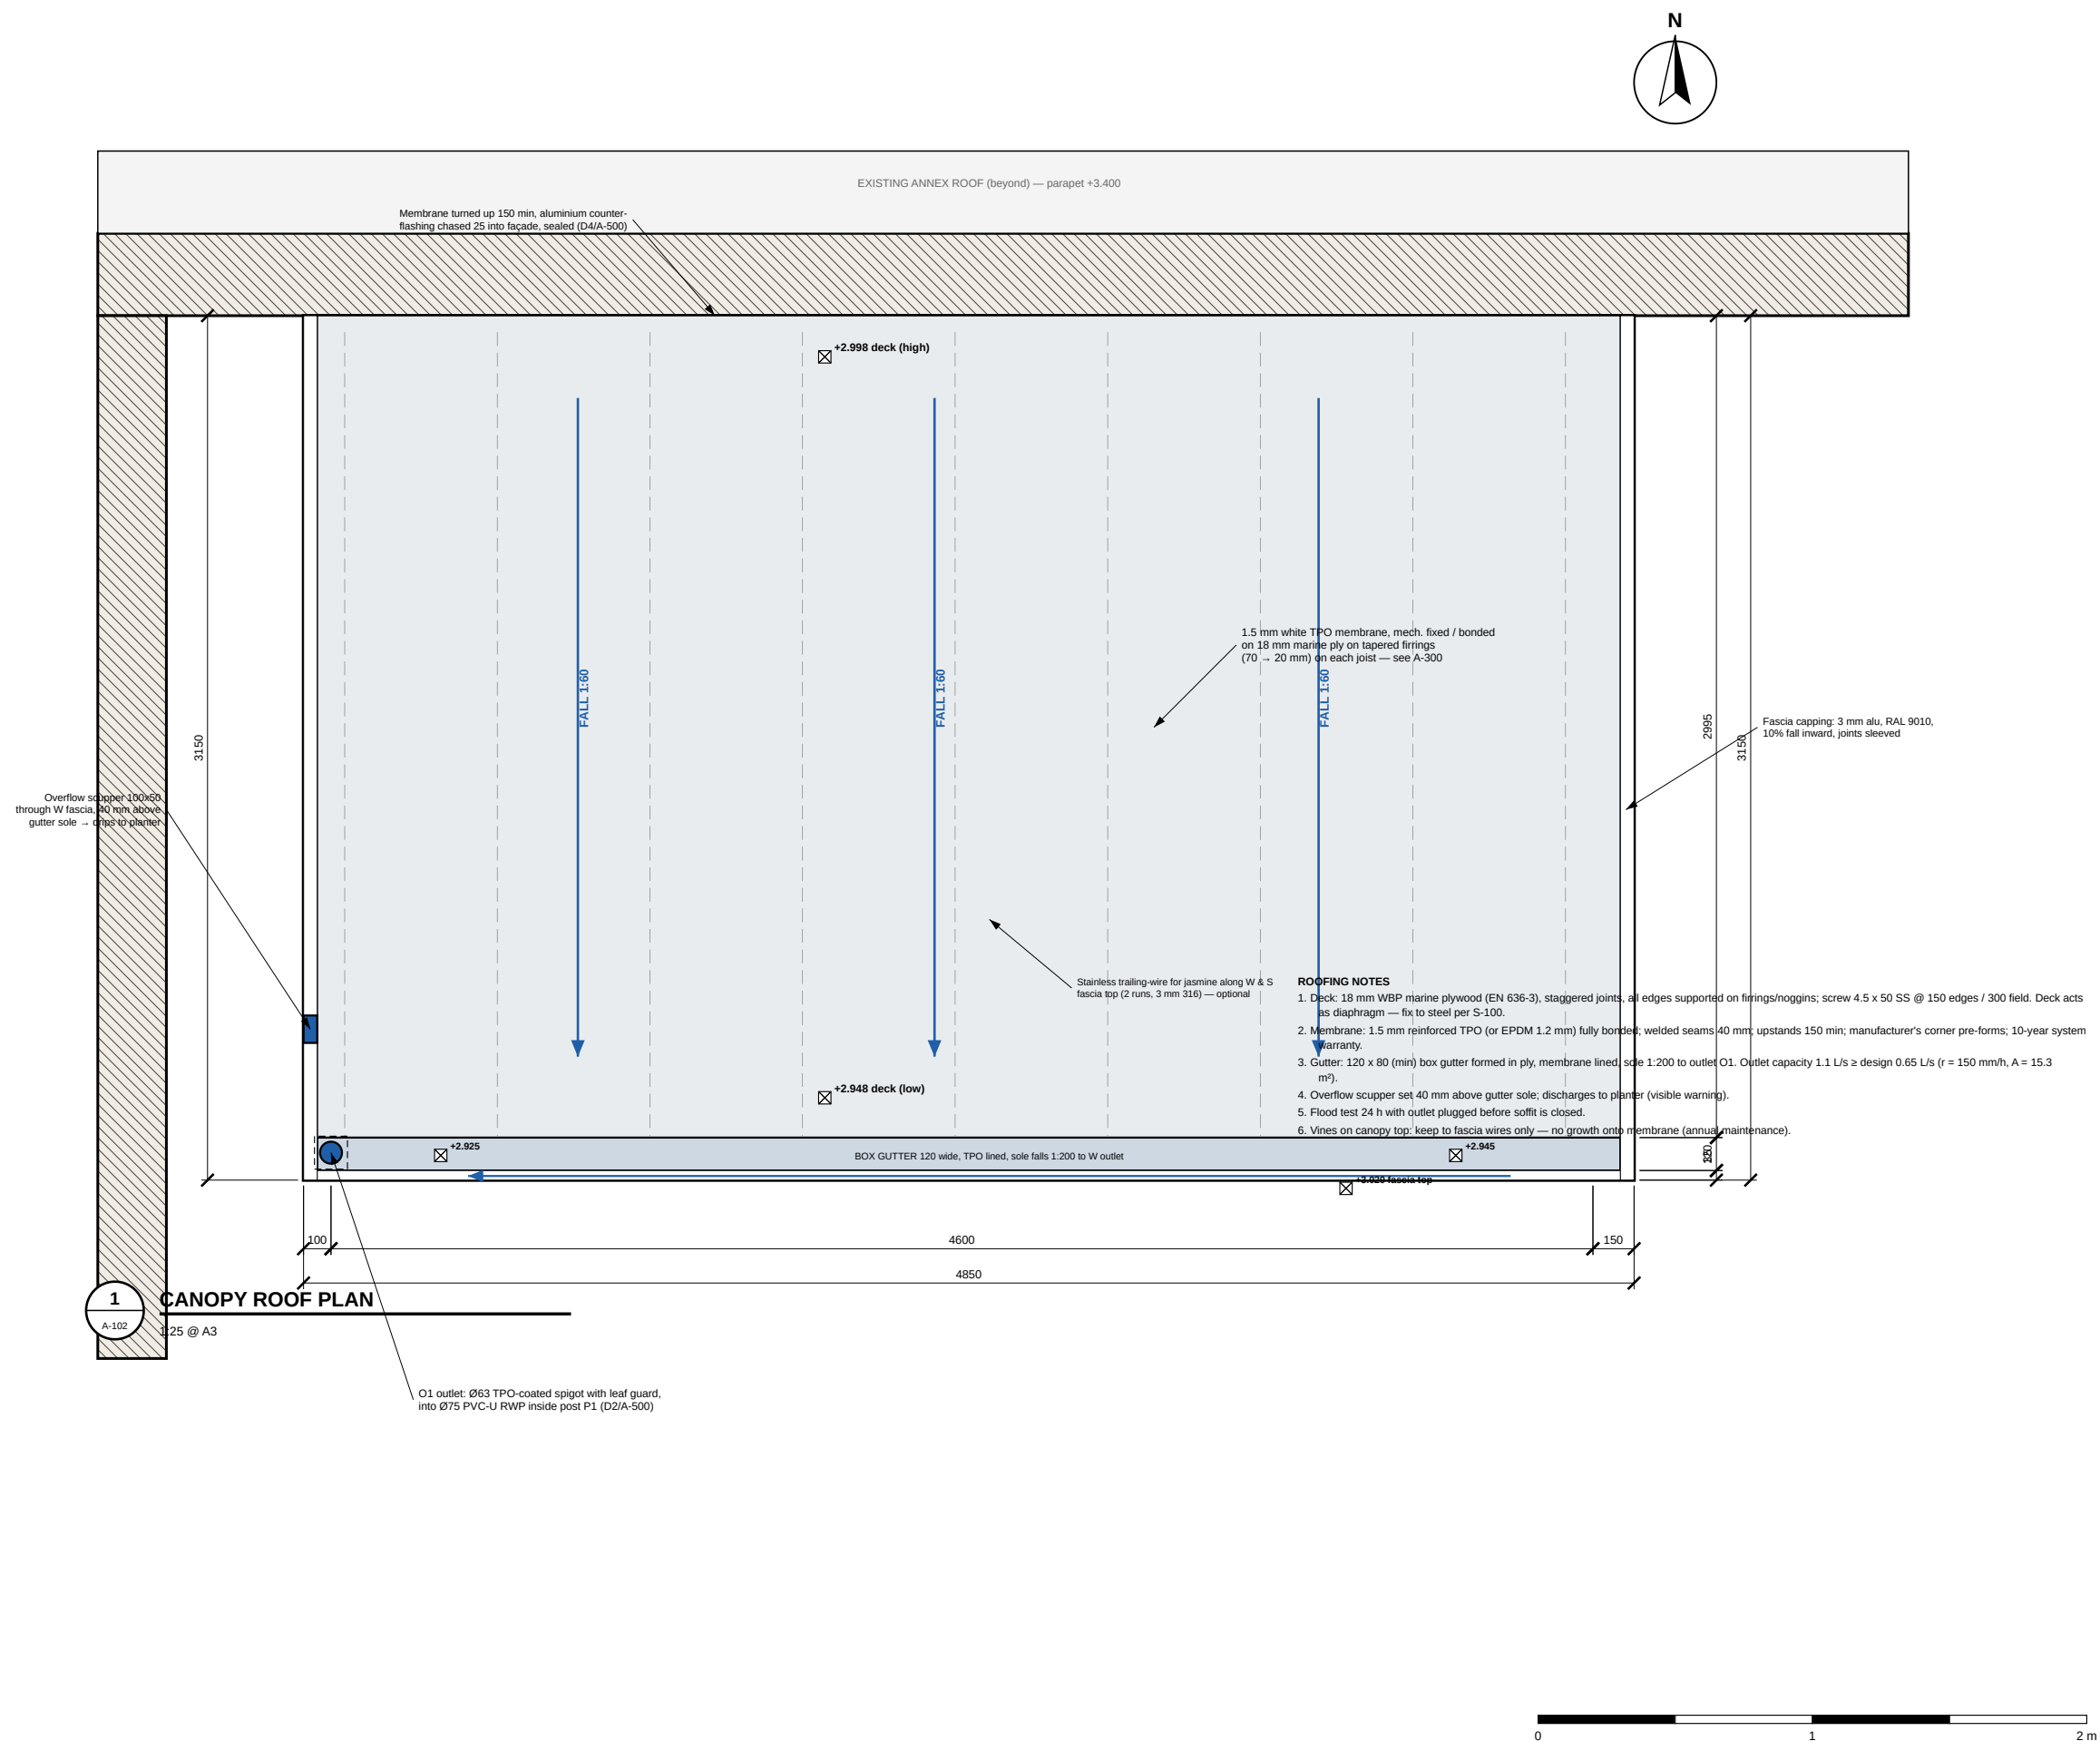

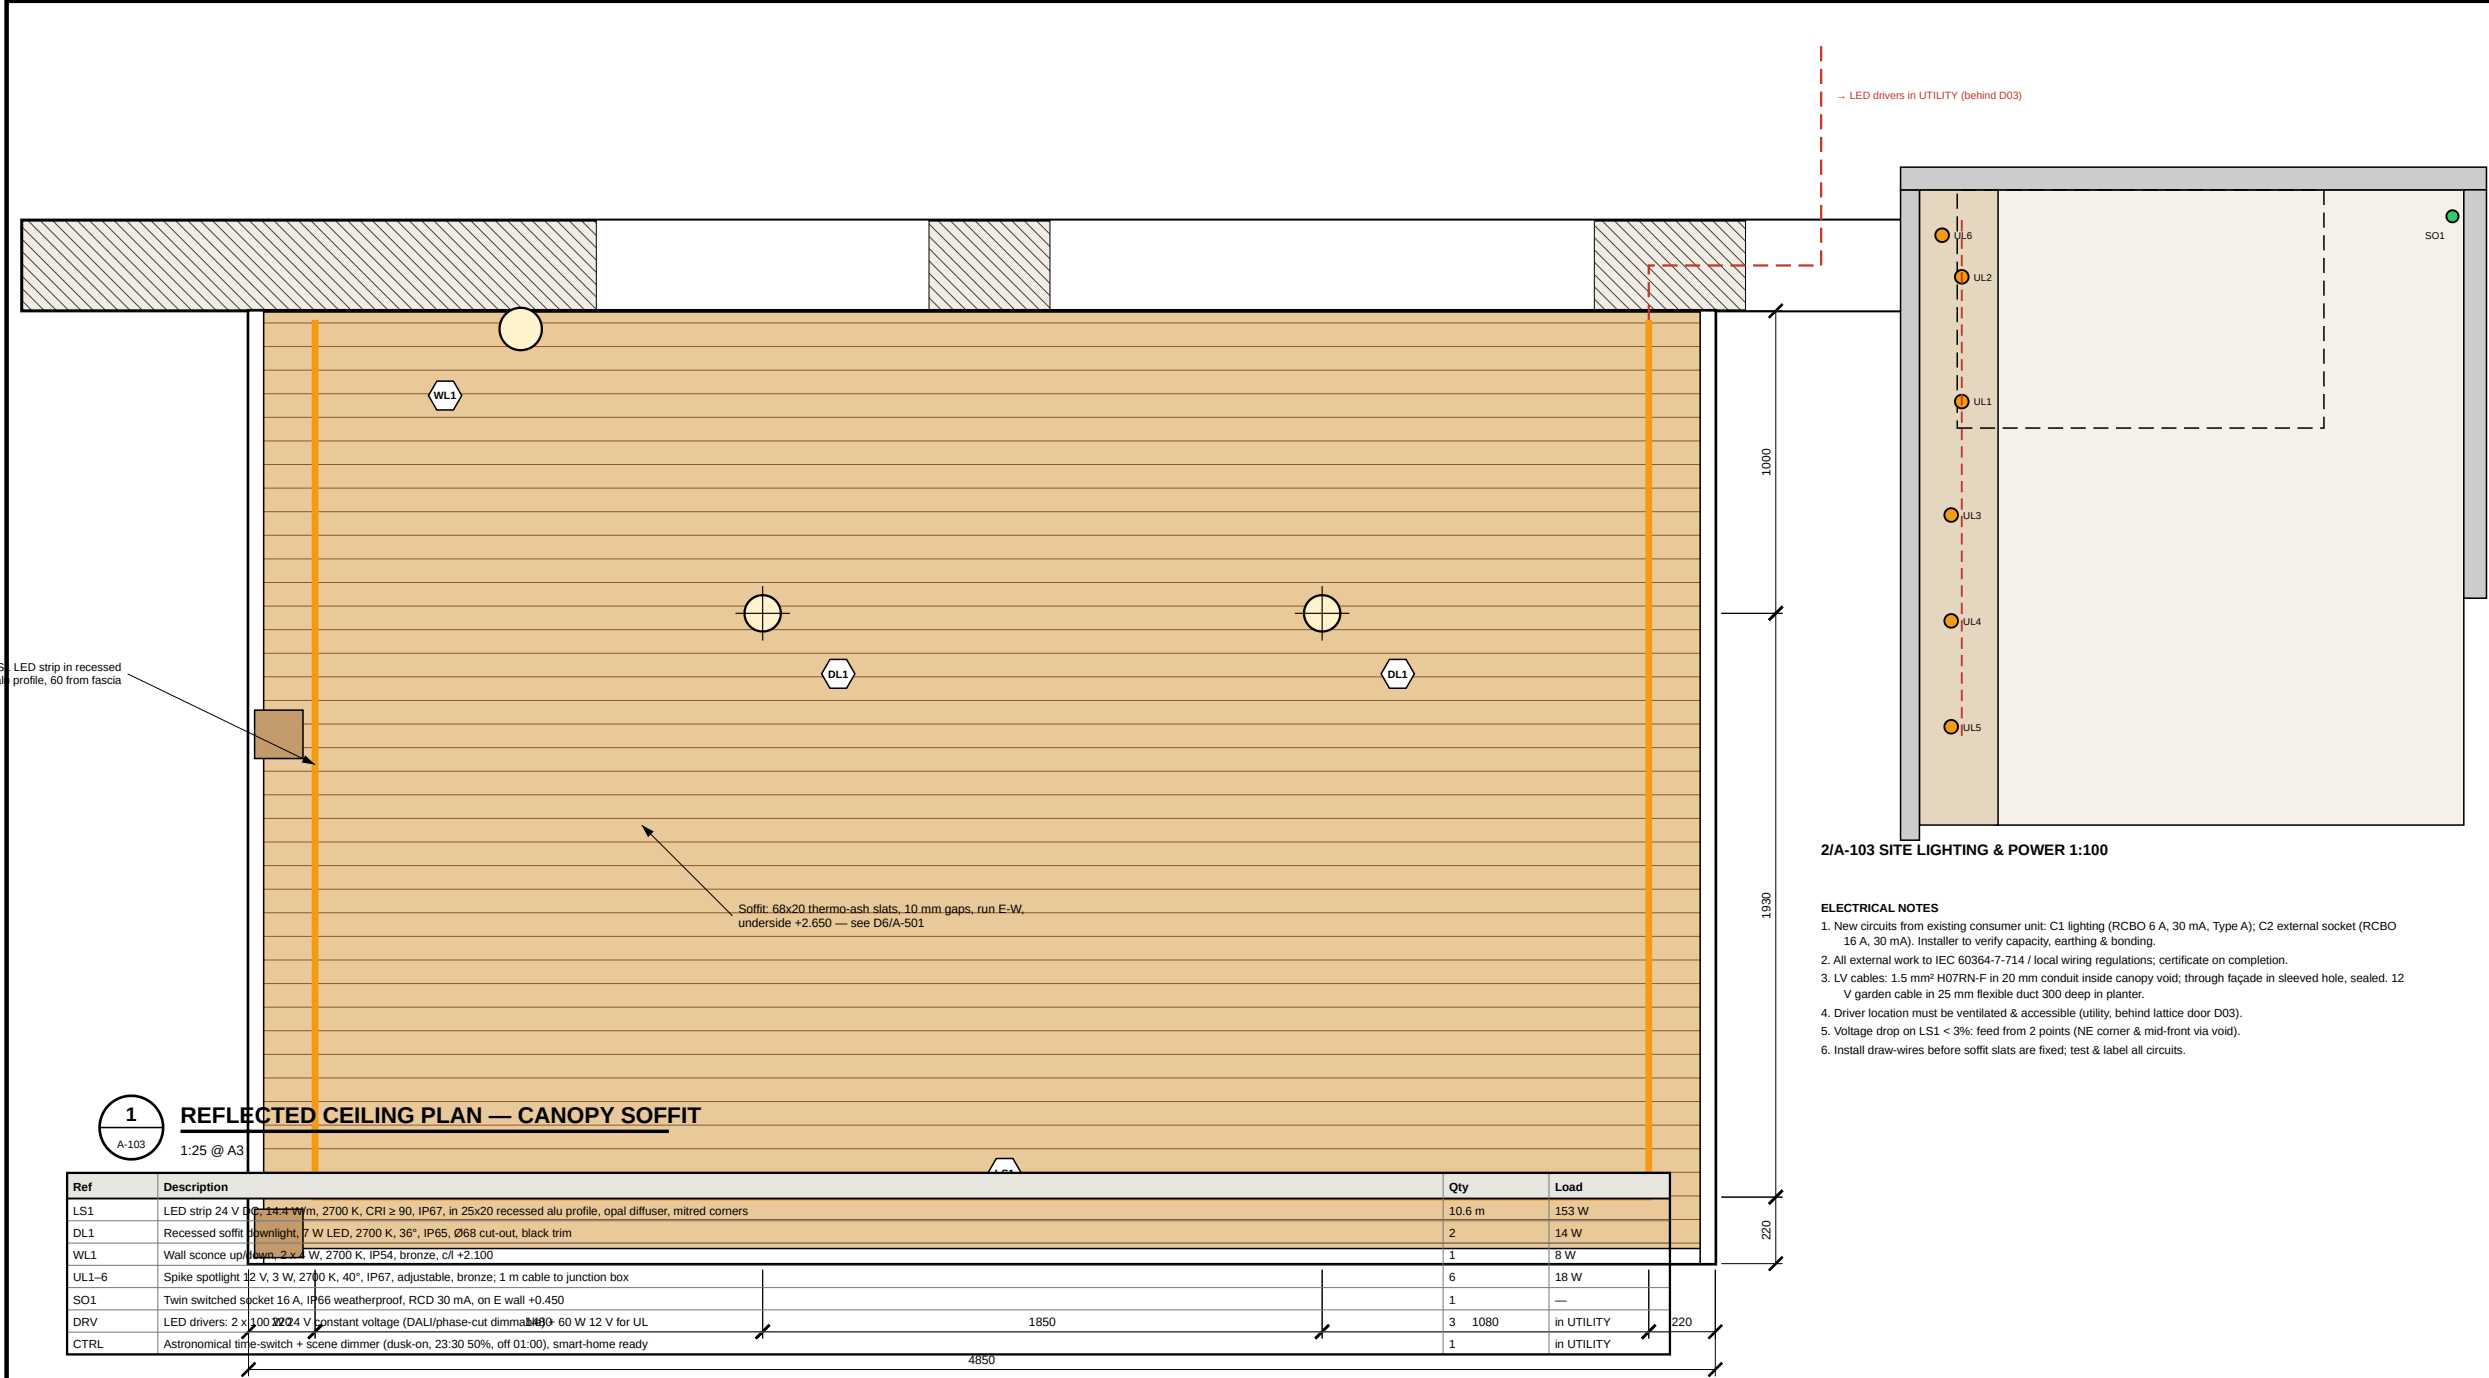

2/A-103 SITE LIGHTING & POWER 1:100

ELECTRICAL NOTES

- New circuits from existing consumer unit: C1 lighting (RCBO 6 A, 30 mA, Type A); C2 external socket (RCBO 16 A, 30 mA). Installer to verify capacity, earthing & bonding.
- All external work to IEC 60364-7-714 / local wiring regulations; certificate on completion.
- LV cables: 1.5 mm² H07RN-F in 20 mm conduit inside canopy void; through façade in sleeved hole, sealed. 12 V garden cable in 25 mm flexible duct 300 deep in planter.
- Driver location must be ventilated & accessible (utility, behind lattice door D03).
- Voltage drop on LS1 < 3%; feed from 2 points (NE corner & mid-front via void).
- Install draw-wires before soffit slats are fixed; test & label all circuits.

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

- Do not scale from this drawing. Use figured dimensions only.
- All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
- Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
- Read with all other architectural, structural & services drawings and the specification notes (A-001).
- Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
- Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

Reflected ceiling plan, lighting & power

SCALE @ A3 1:25 / 1:100	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. REV

A-103 C01

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off



DRAWING TITLE	
Planting & irrigation plan	
SCALE @ A3	DATE
1:50	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL
DRAWING No.	REV

A-104 C01

Code	Botanical name	Common	Spec at planting	Qty	Notes
TJ	Trachelospermum jasminoides	Star jasmine (climber)	2 L, 60–90 cm, on canes	6	On posts, façade & wall wires
PT	Pittosporum tobira 'Nana'	Dwarf mock orange	10 L, 40–50 cm	3	Evergreen mound, scented
WF	Westringia fruticosa	Coastal rosemary	7.5 L, 40 cm	2	Fine grey-green foliage
RO	Rosmarinus officinalis 'Miss Jessopp'	Upright rosemary	5 L, 40 cm	2	Aromatic, drought tolerant
MY	Myrtus communis 'Tarennia'	Dwarf myrtle	10 L, 50–60 cm	2	White flowers, evergreen
LA	Lavandula angustifolia 'Hidcote'	English lavender	3 L	2	Front of border
ER	Erigeron karwinskianus	Mexican fleabane	2 L	5	Spills over coping edge
OL	Olea europaea (multi-stem)	Olive tree in pot	1.8–2.0 m, 50 L	1	Pot: 600 Ø fibre-clay, white

- SOIL & PLANTER BUILD-UP** (see C-C / A-102)
Topsoil: 300 mm screened multipurpose topsoil BS 3882 / equiv. + 25% composted green waste, pH 6.5–7.5; 50 mm composted bark mulch (10–40 mm) to finish +0.340 (60 below coping). Subsoil: loosen existing to 300 mm depth before backfilling. Drainage: 100 mm 10–20 mm clean gravel on geotextile at formation — no closed base.
- IRRIGATION**
• 2 runs 16 mm inline drip pipe, 2.0 L/h PC drippers @ 330 c/c, laid on soil under mulch, pinned @ 1.0 m (total 2 x 8.2 m + 4 m to pot = 20.5 m).
• 1 spur 4 mm to olive pot with 2 x 4 L/h stake drippers.
• Header: 20 mm MDPE in 50 mm duct through façade at X = 300, from utility: stop-valve + double check valve (backflow) + 120-mesh filter + 2.0 bar regulator + 24 V solenoid + 2-zone controller with rain sensor.
• Flush valve at south end of each run. Program: 2 x 15 min/day summer, 1 x 10 min spring/autumn.
- CLIMBER SUPPORT**
• Posts: 4 no. 3 mm 316 SS wires per post, vertical, on 40 mm stand-off eyes @ 600 vertical; tensioner at top.
• Boundary wall: horizontal 3 mm 316 SS wires @ 400 (+0.60, +1.00, +1.40, +1.75), vertical @ 1.5 m, eyes on M8 resin anchors; full 8.2 m length.
• Façade W of D01: vertical wires @ 300, X = 100 – 1500, to +2.60.
- PLANTING NOTES**
• Plant Sept–Nov or Mar–Apr. Water in thoroughly; 12-month establishment & defects period, replace failures.
• Tie jasmine to wires on planting; train 2 leaders per post spiralling; pinch to keep fascia line clear.
• Uplights UL1–UL6 set before mulching; aim after dark with client.
• Olive pot: 600 Ø x 550 h fibre-clay white, 50 mm drainage gravel, feet; loam-based compost (J1 No.3).

- LEGEND
- 16 mm drip line
 - Uplight UL (see A-103)
 - SS climbing wires on wall
 - Plant (code), circle = spread at 3 yrs

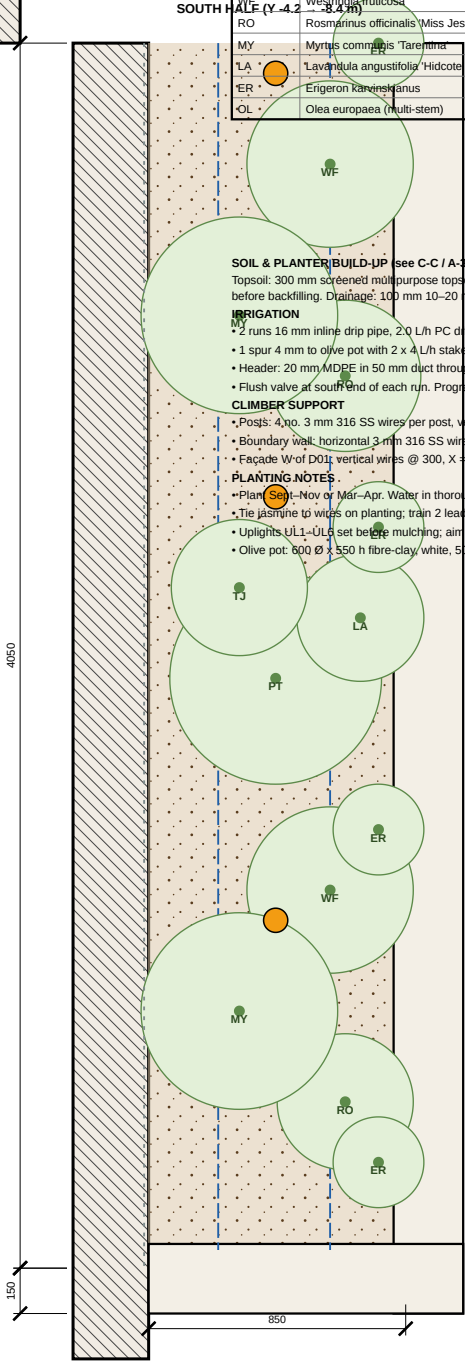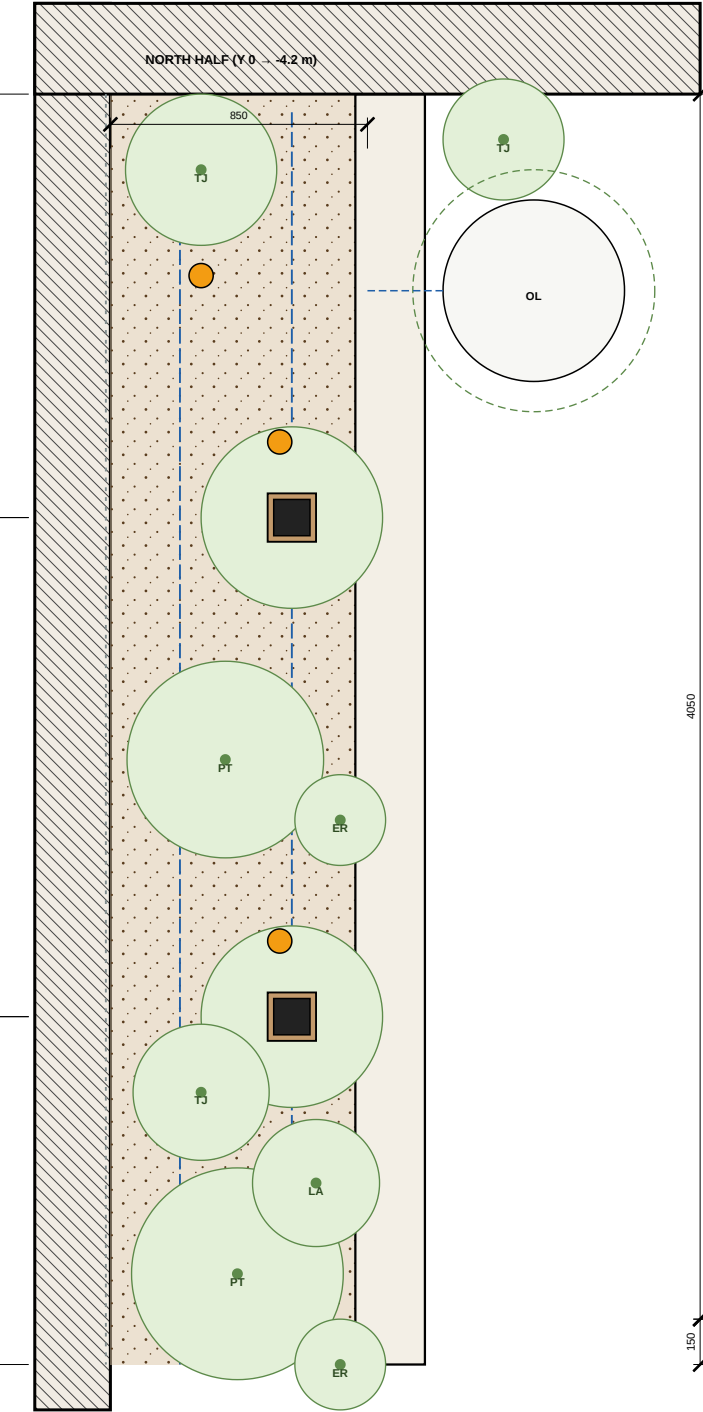

1/A-104 PLANTER PLANTING PLAN — 1:25 @ A3 (shown in two halves, north at top)

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off


DRAWING TITLE

Elevation A — annex façade & canopy (looking north)


SCALE @ A3	DATE
1:25	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV


A-200 C01

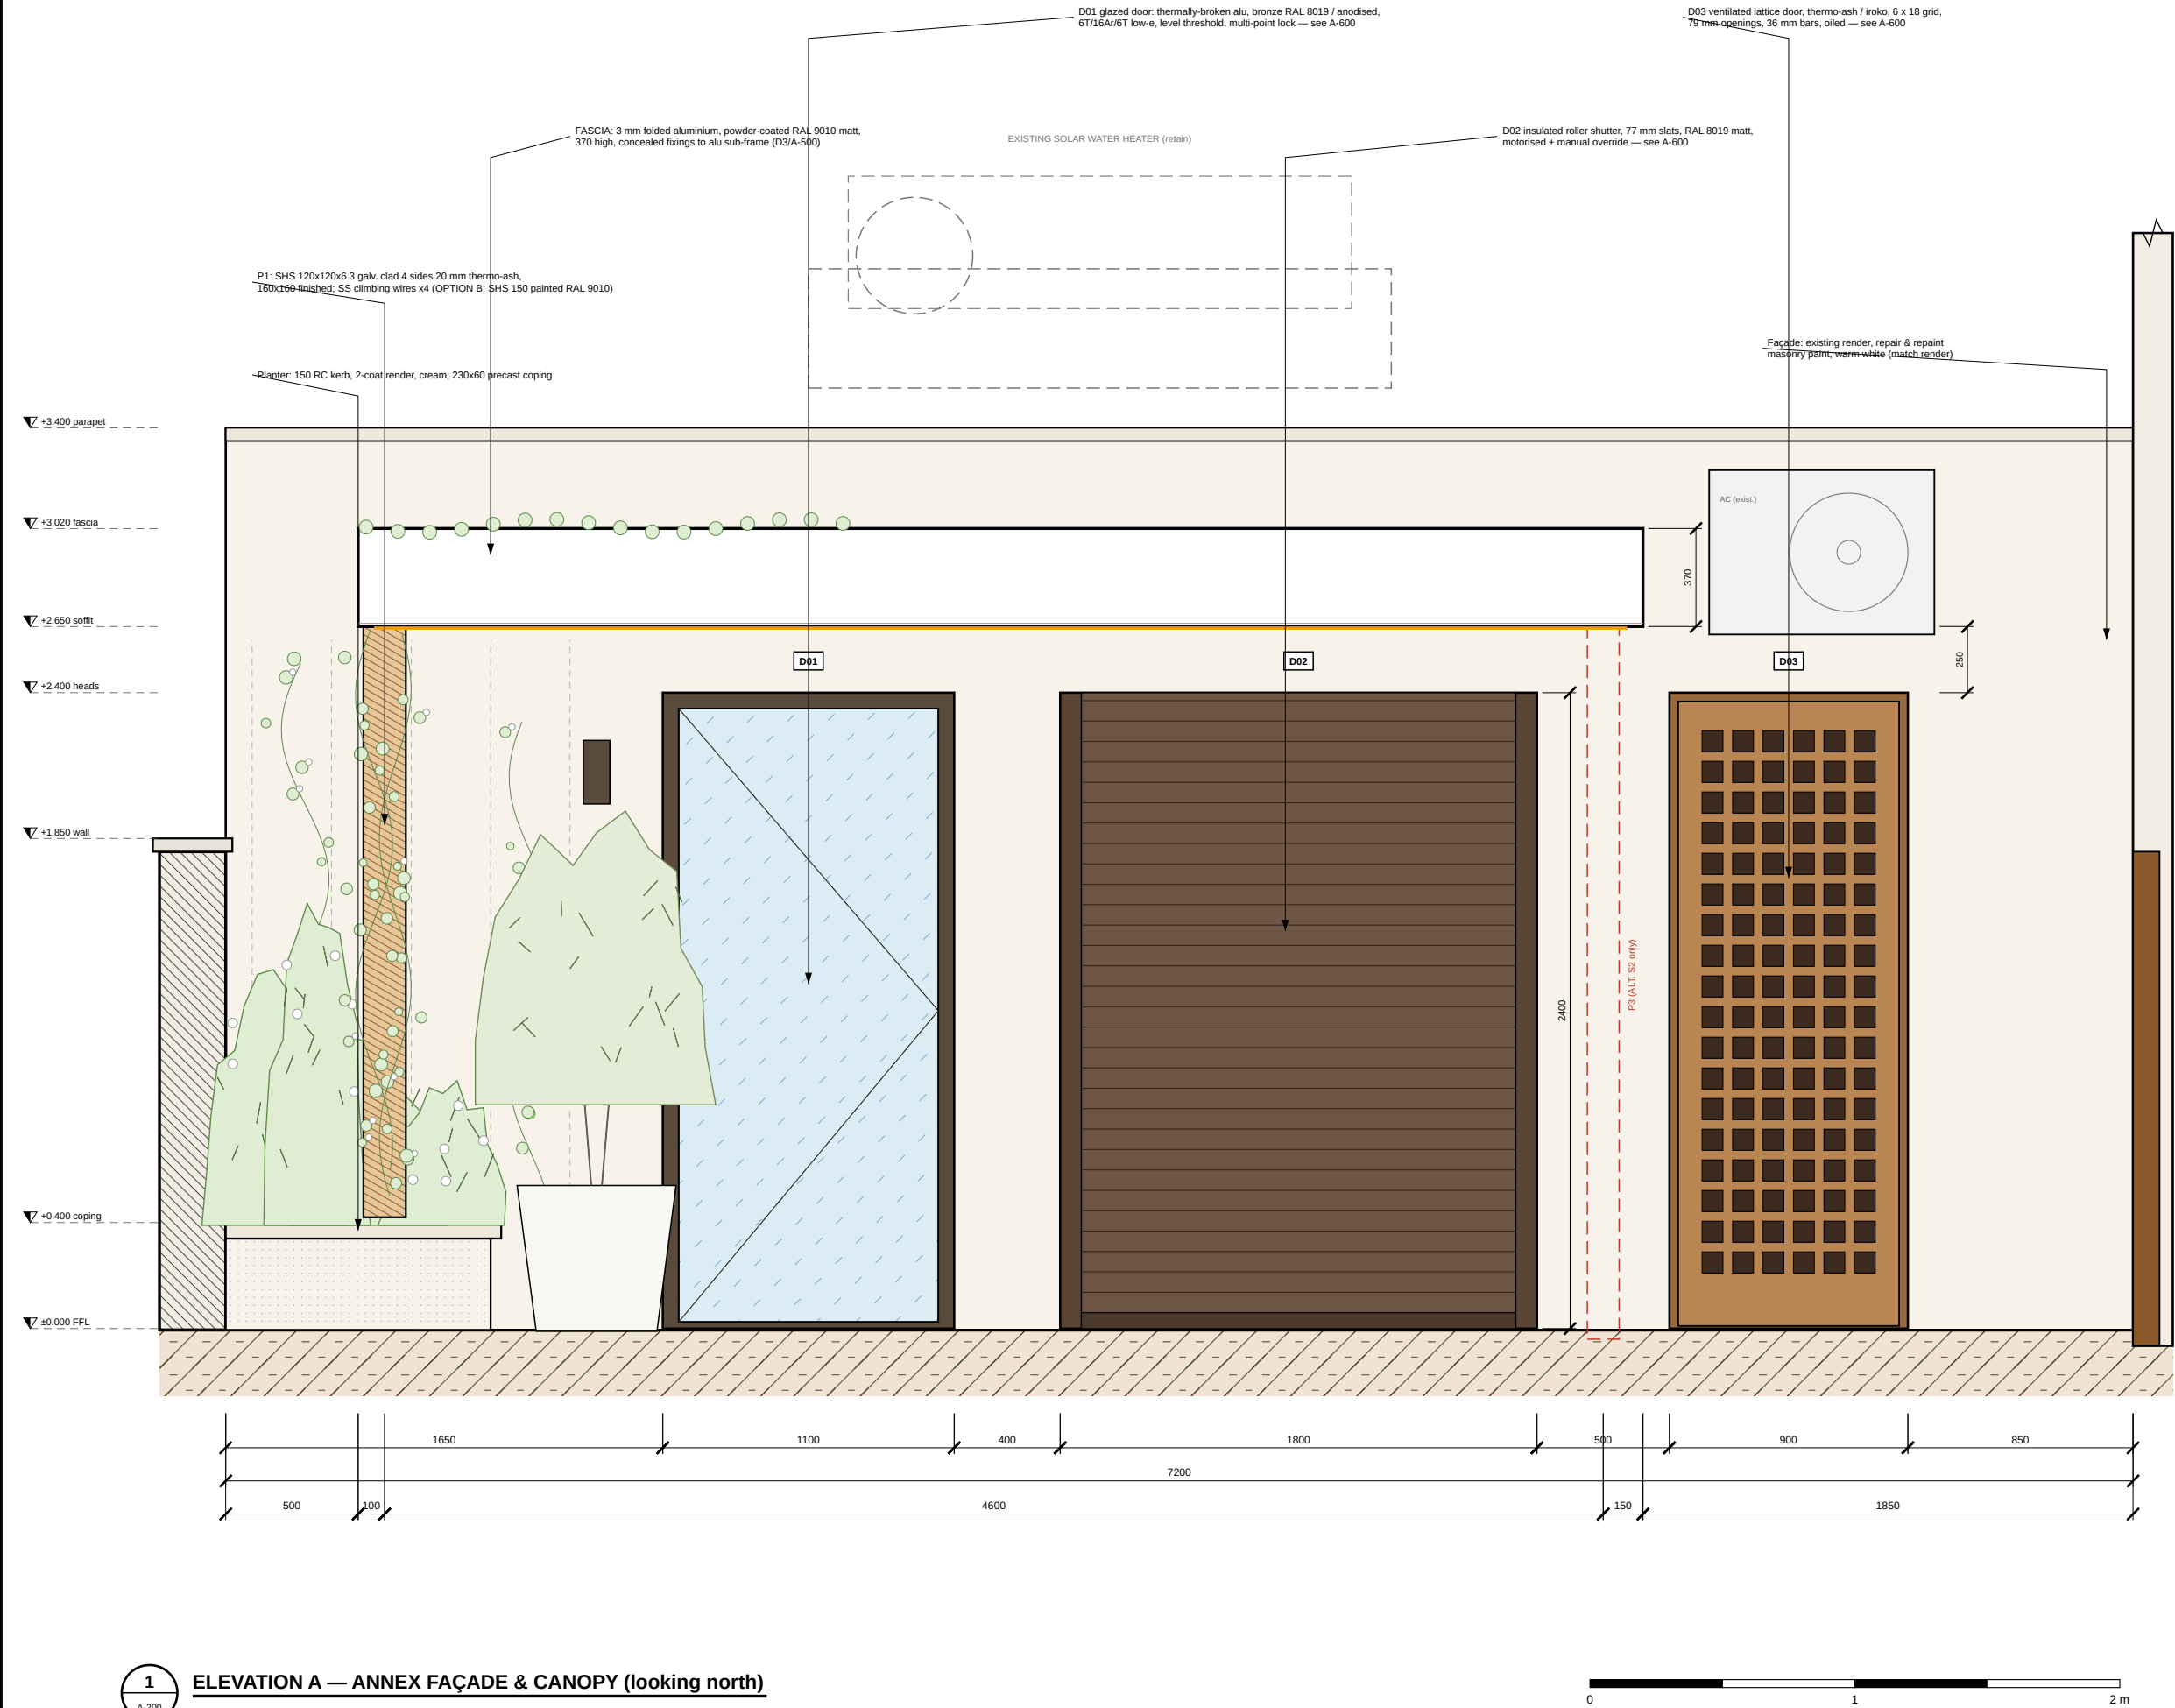

1 ELEVATION A — ANNEX FAÇADE & CANOPY (looking north)
A-200 1:25 @ A3 planting shown indicatively at 3 years

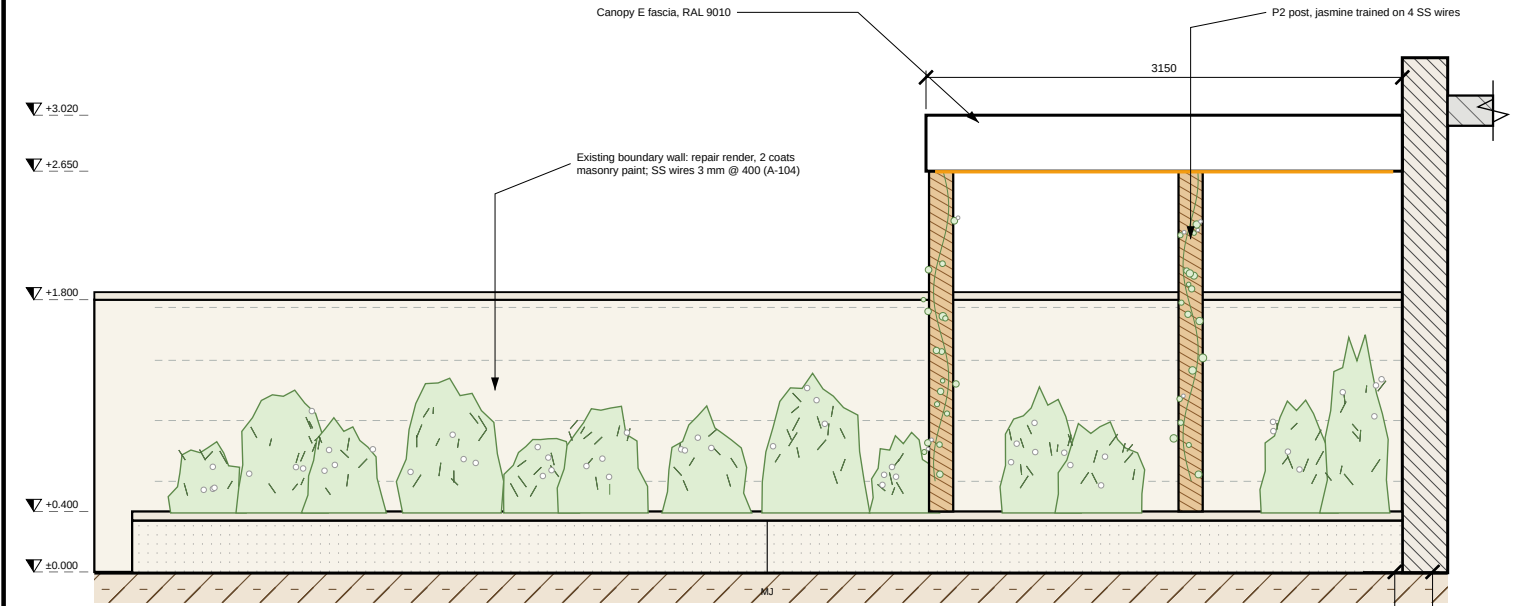

1 ELEVATION B — PLANTER & BOUNDARY WALL (looking west)
A-201 1:50 @ A3

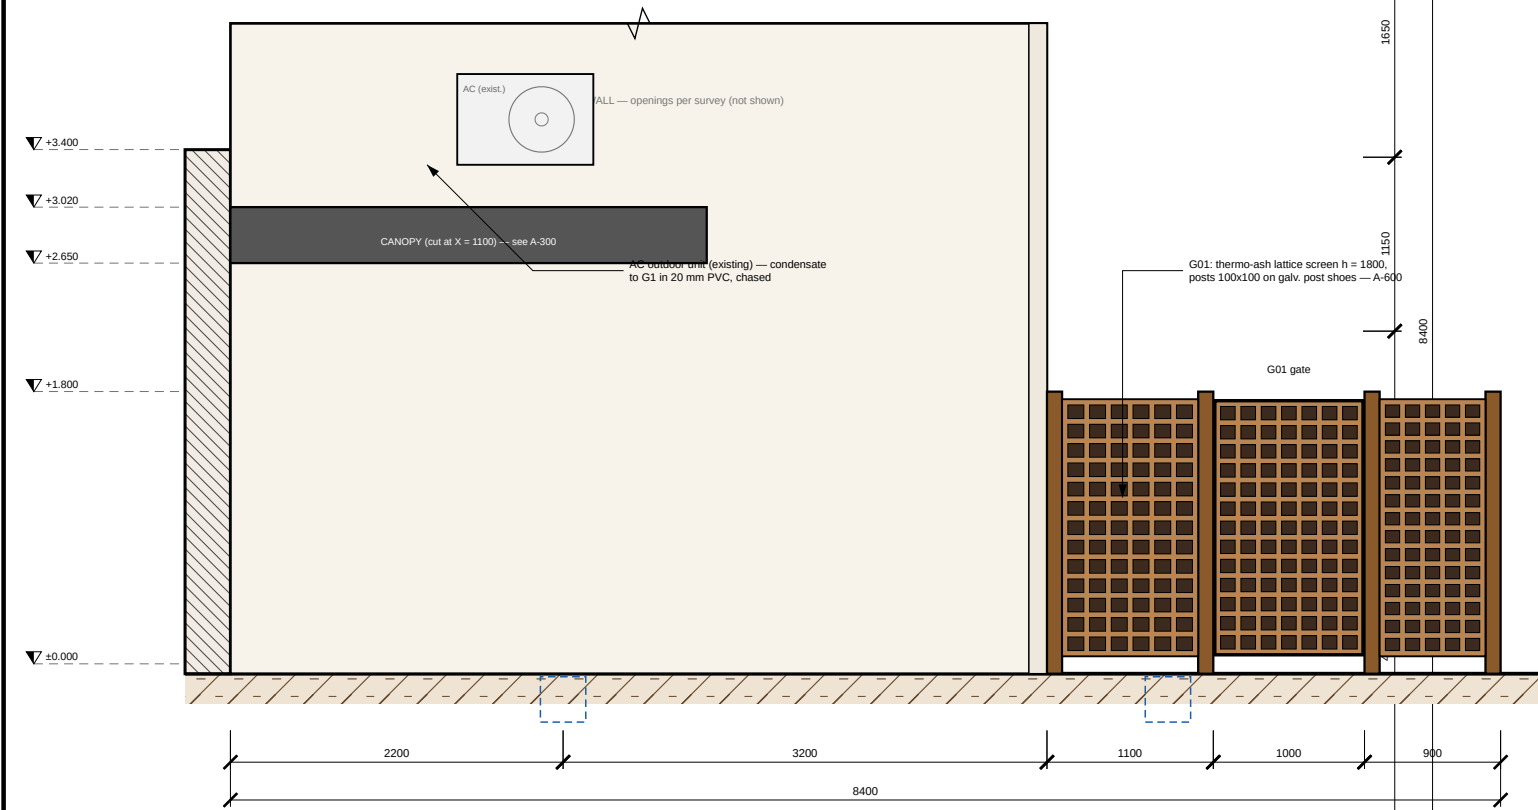

2 ELEVATION C — HOUSE WALL & SCREEN (looking east)
A-201 1:50 @ A3



COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE
Elevations B (looking west) & C (looking east)

SCALE @ A3 1:50	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL

DRAWING No. REV

A-201 5 m **C01**

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off


DRAWING TITLE

Section A-A — canopy, door threshold & paving (N-S at X = 2600)

SCALE @ A3	DATE
1:20	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

A-300 C01

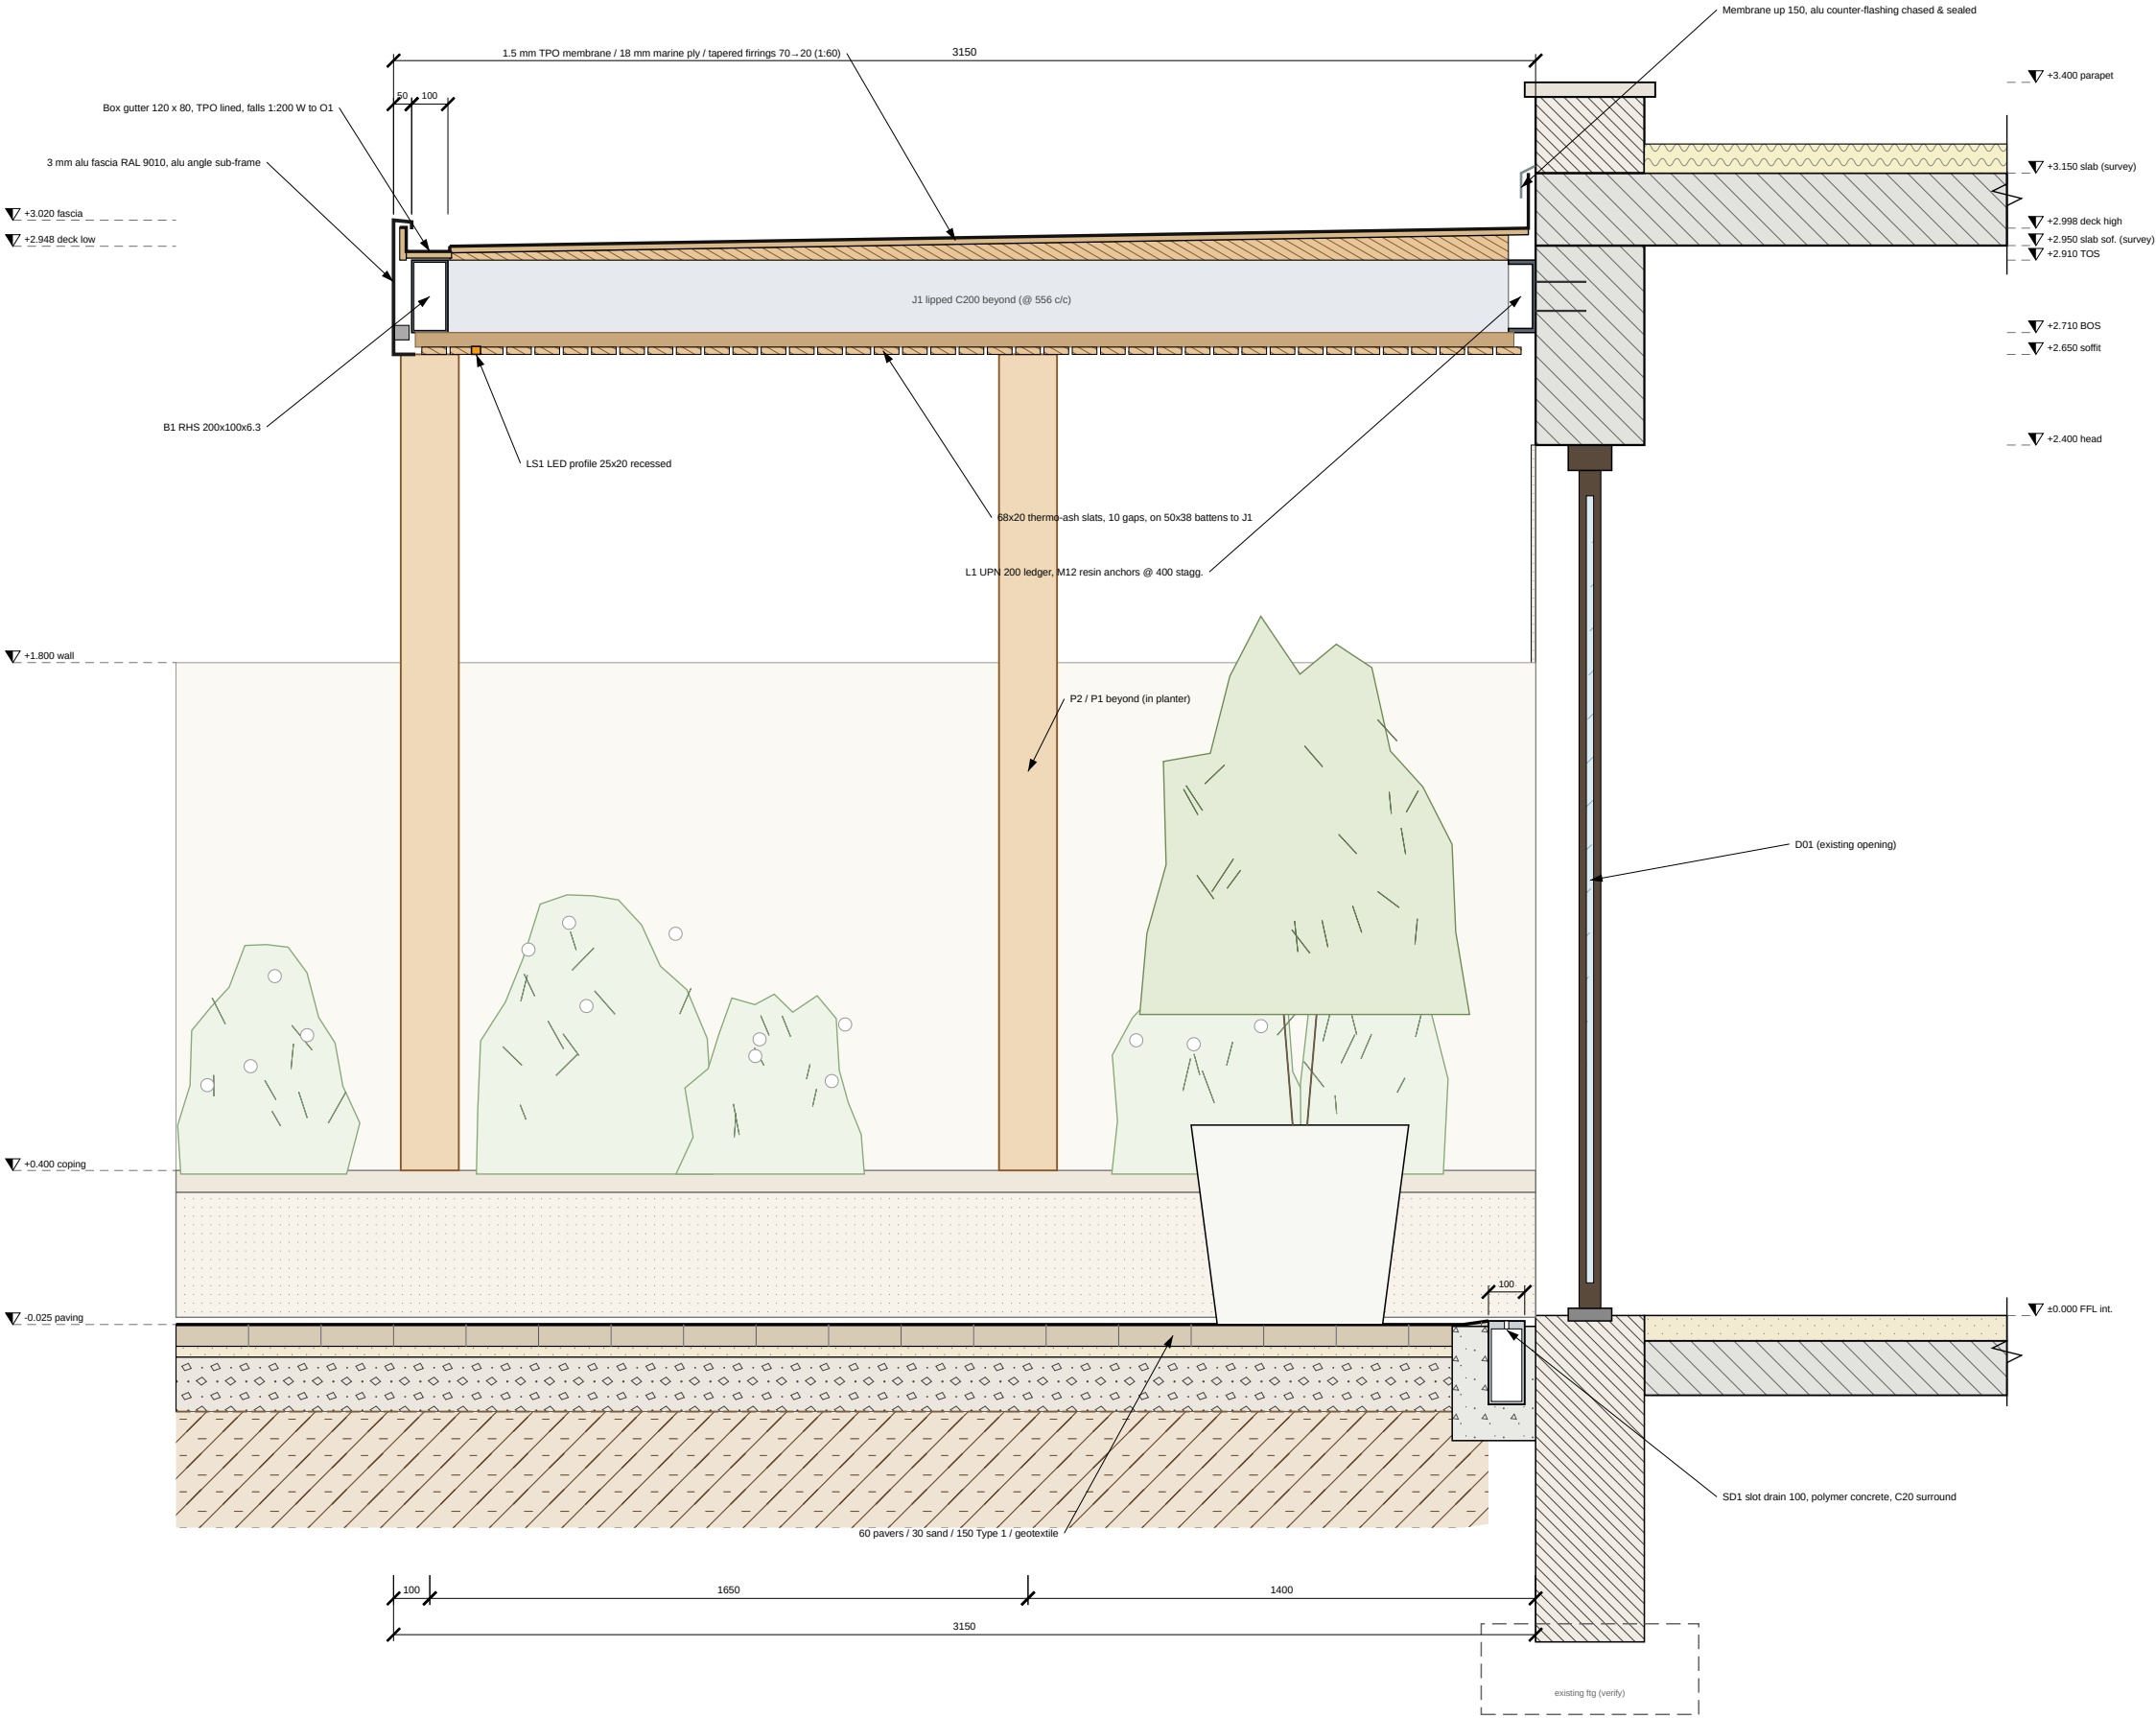


1 SECTION A-A

A-300 1:20 @ A3 through D01, canopy & slot drain, looking west

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

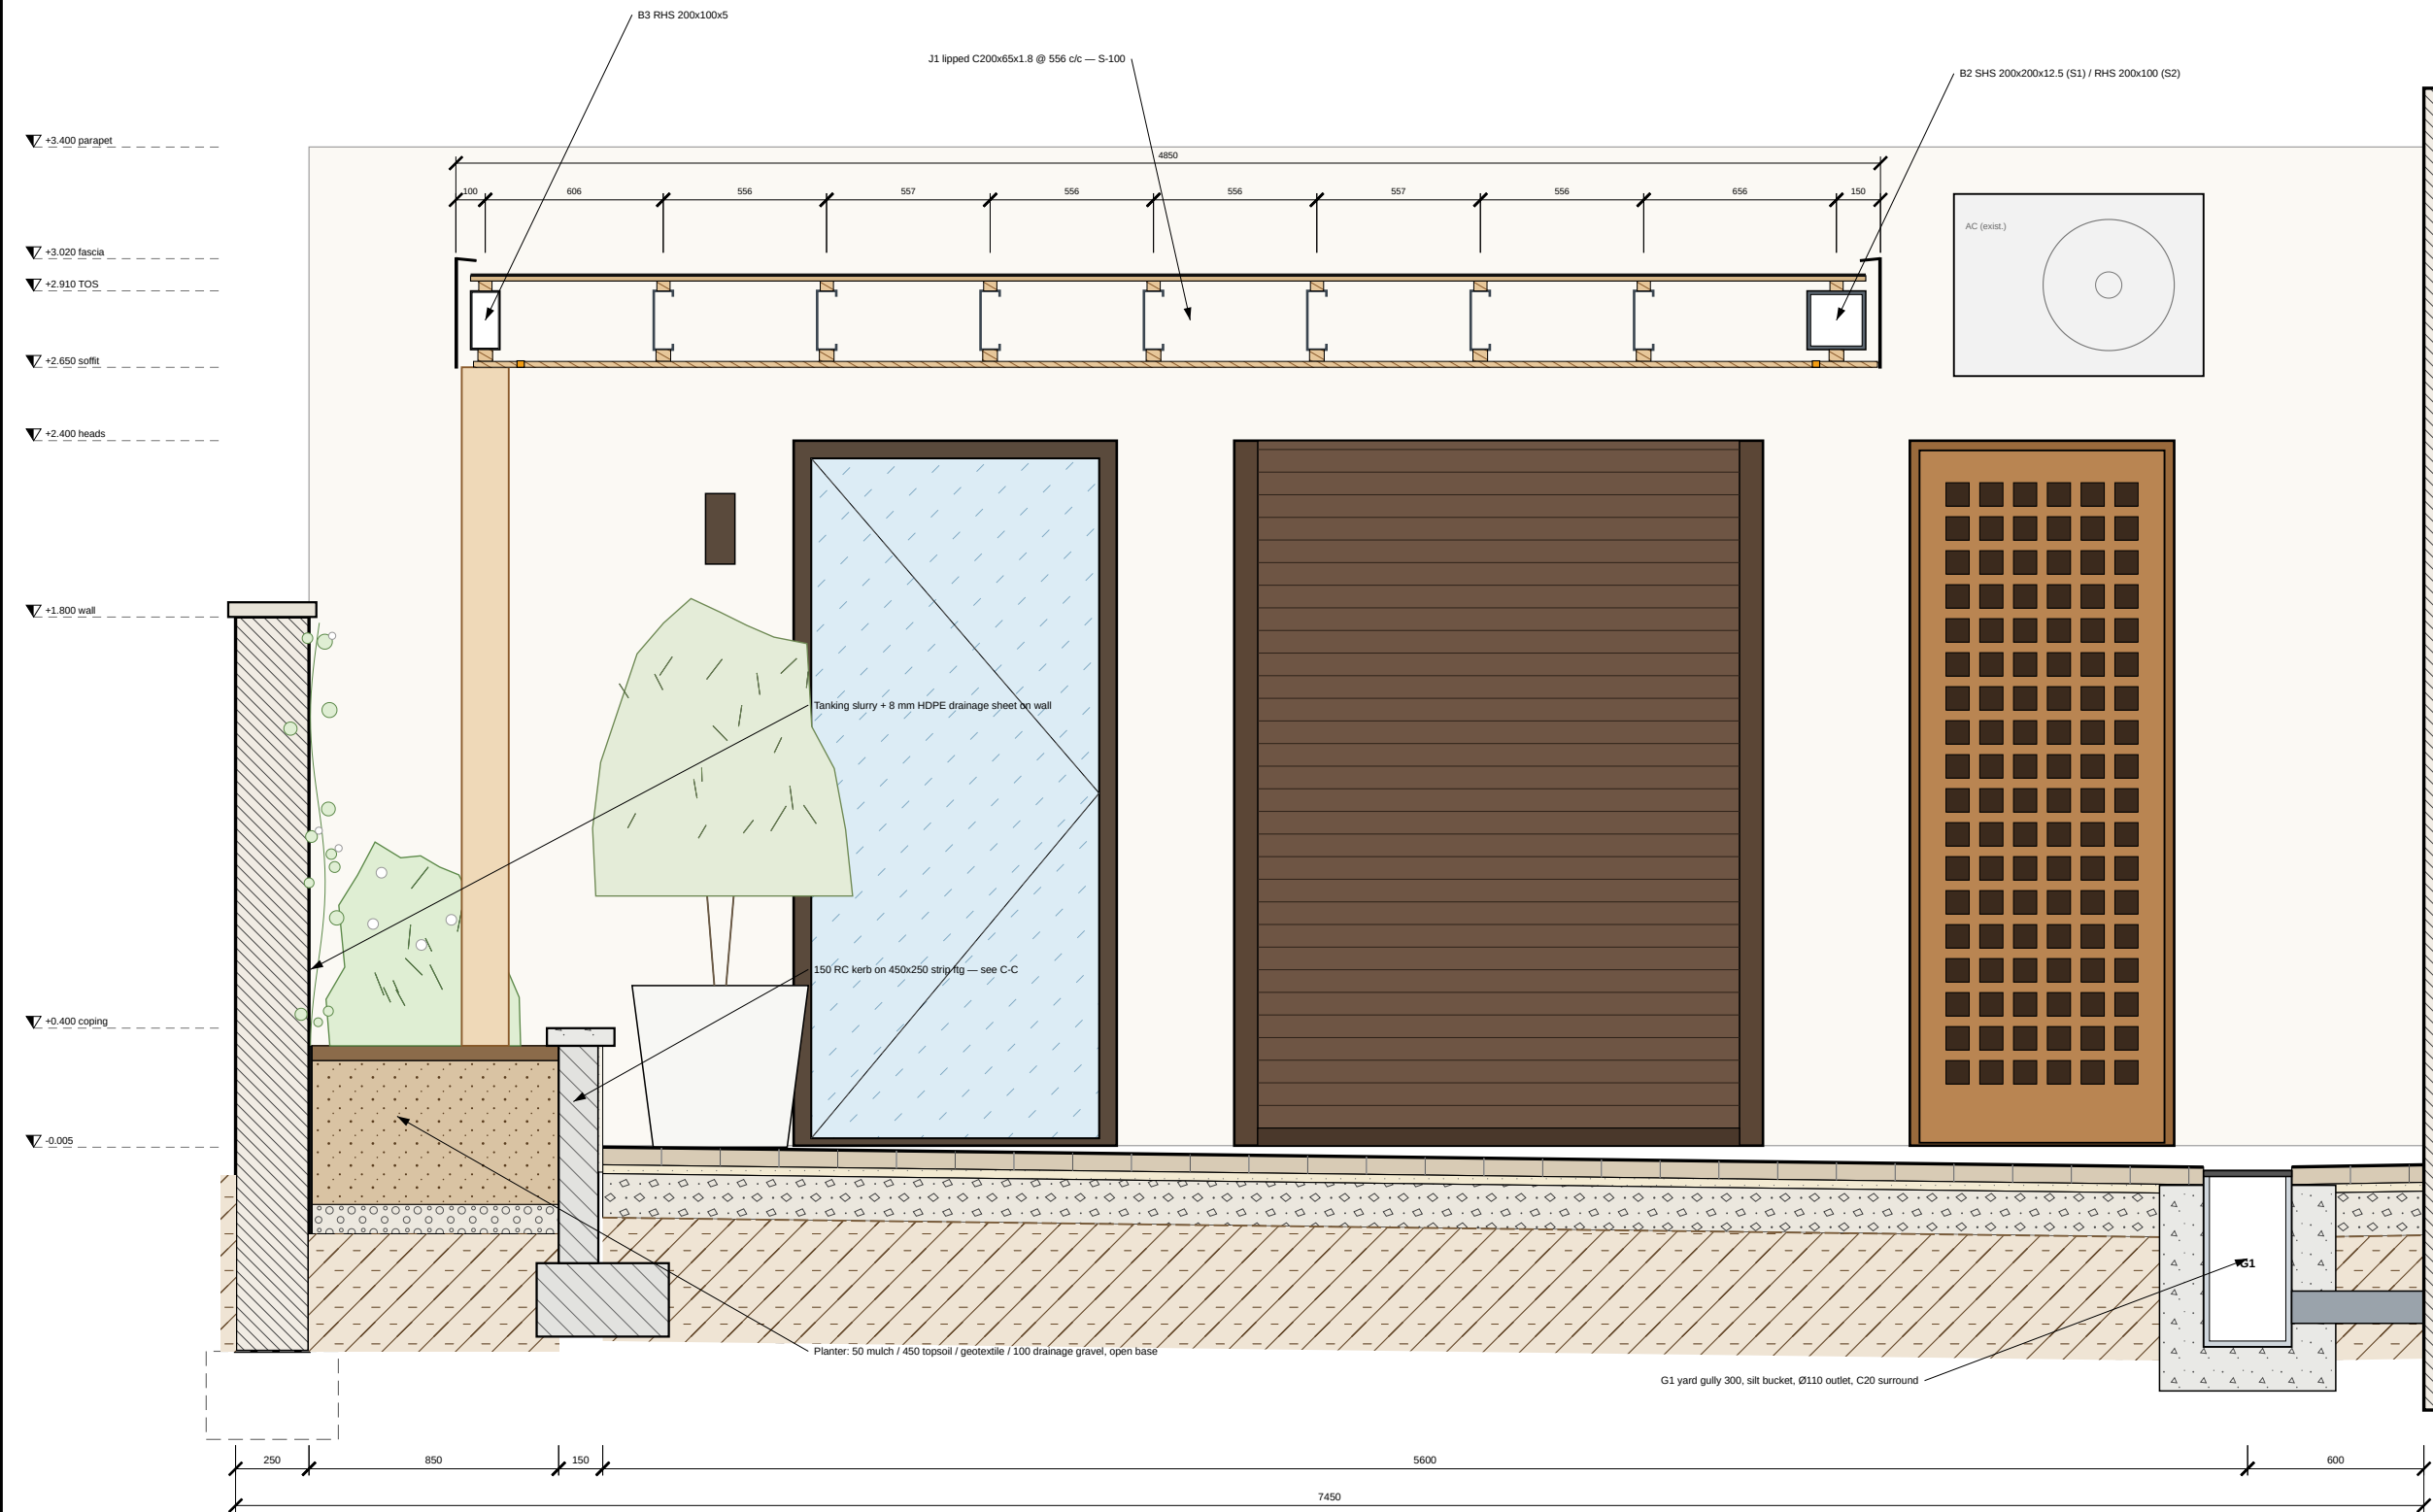

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

Section B-B — planter, canopy & courtyard
(E-W at Y = -2200)

SCALE @ A3 1:25	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL


DRAWING No. REV

A-301 **C01**


1
A-301

SECTION B-B


1:25 @ A3 through planter, canopy & gully G1, looking north





2/A-302 THRESHOLD SLOT DRAIN SD1 — 1:10

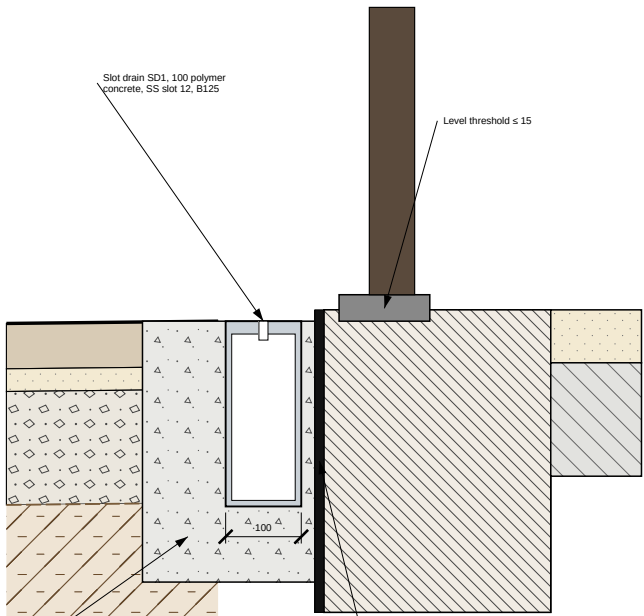


3/A-302 YARD GULLEY G1 / G2 — 1:10

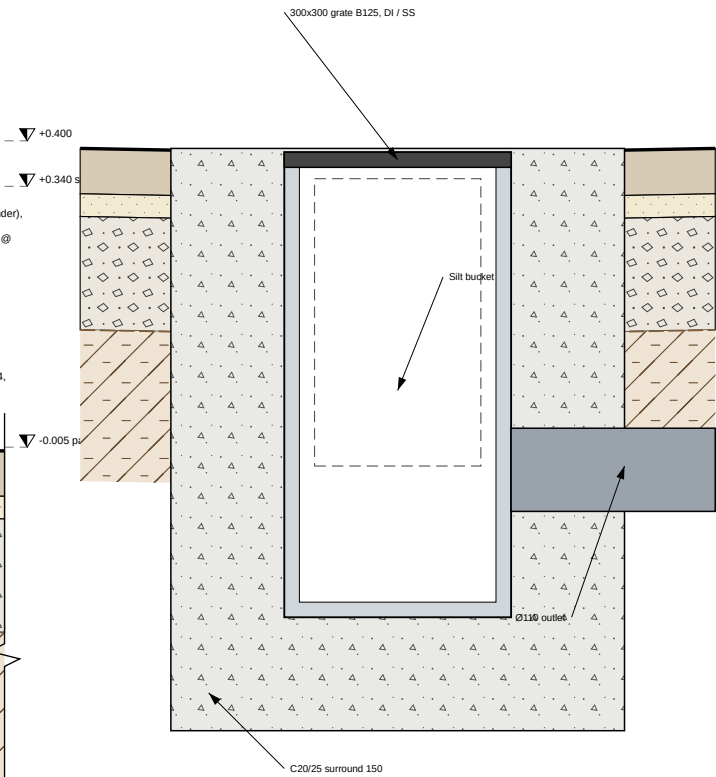

4/A-302 SOUTH EDGE RESTRAINT — 1:10

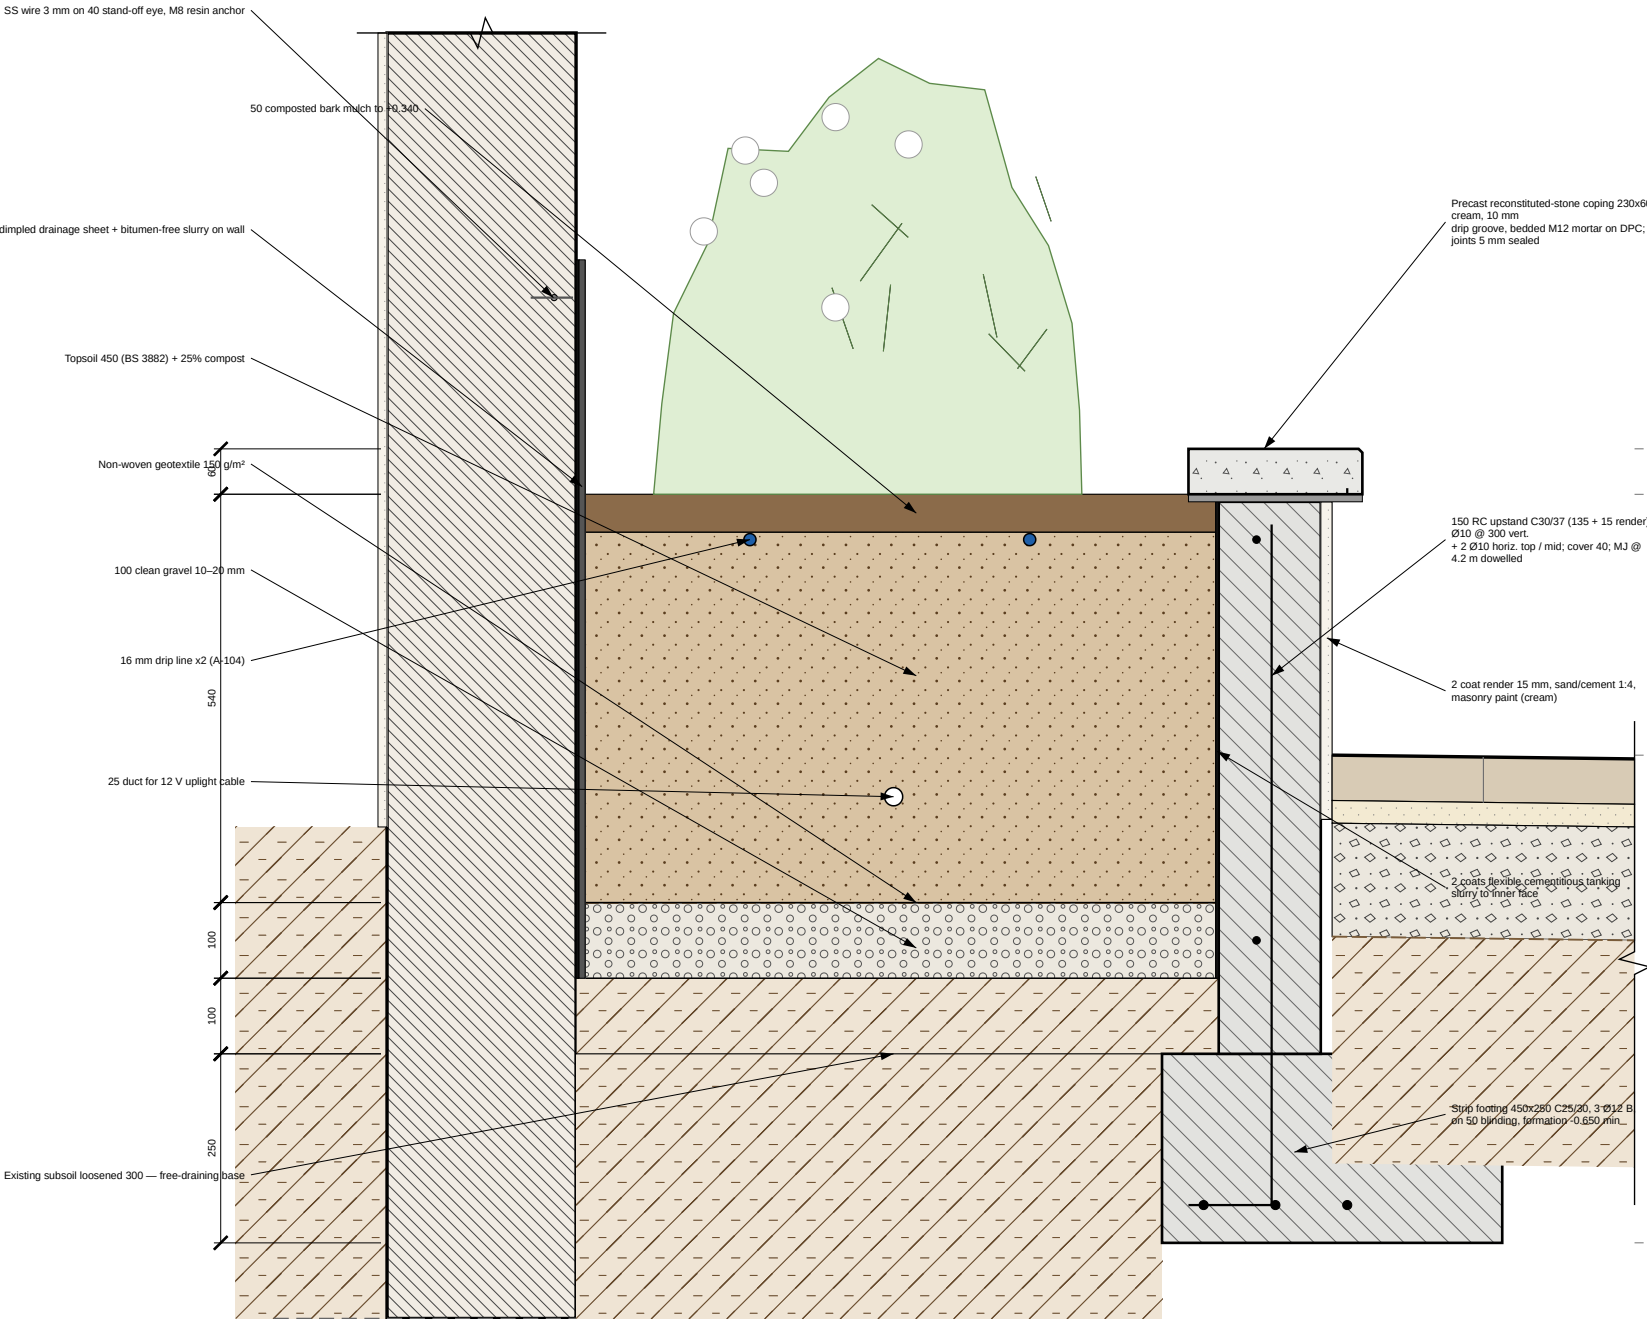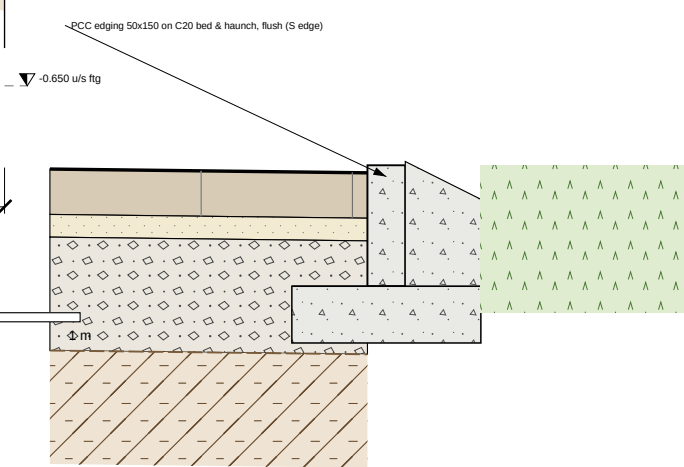

1 SECTION C-C — RAISED PLANTER
1:10 @ A3 at Y = -5000, looking north



COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off


DRAWING TITLE
Section C-C planter & paving / drainage details

SCALE @ A3 1:10	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES ARCHITECTURAL


DRAWING No. **A-302** REV **C01**

D1 POST BASE & PAD FOOTING F1/F2 — 1:10

P2 identical without RWP; P3 (ALT S2) identical

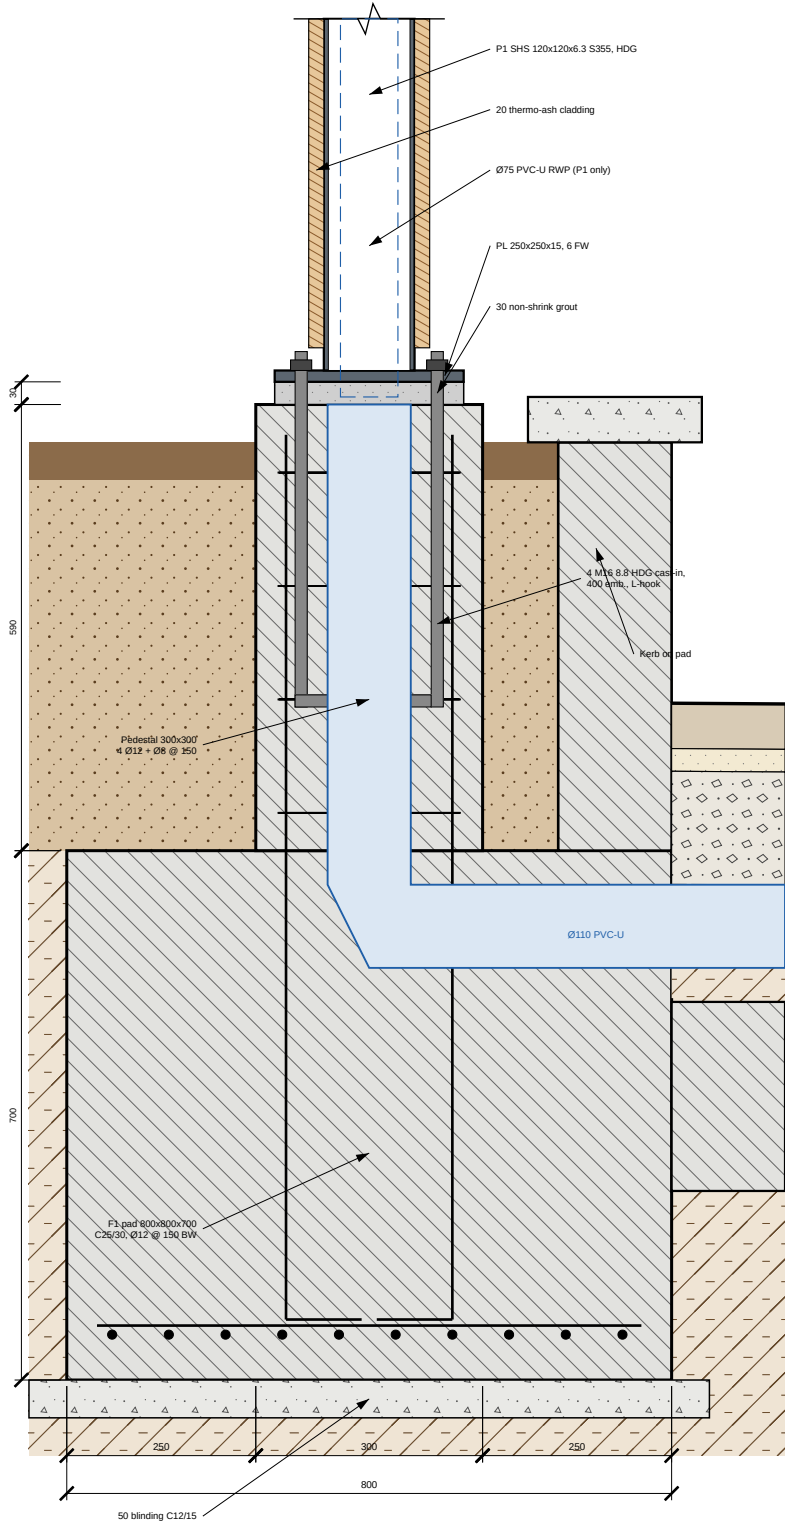


D2 CANOPY CORNER AT P1 — PLAN @ TOS — 1:5

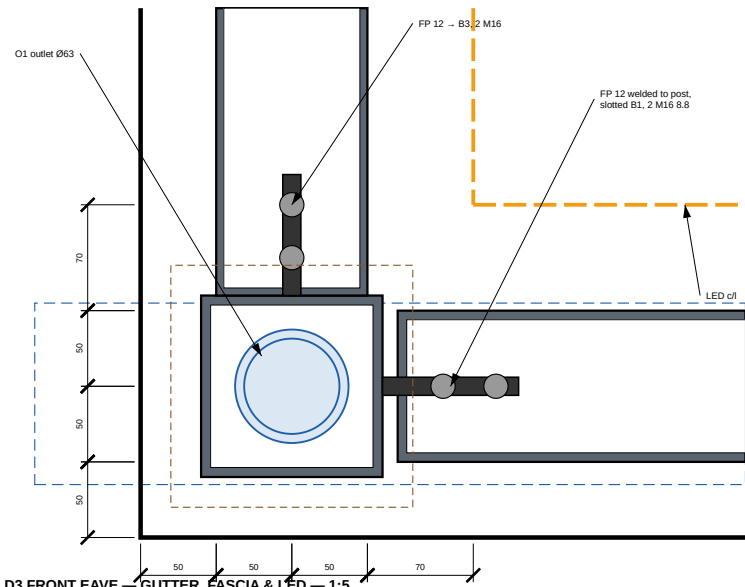


D3 FRONT EAVE — GUTTER, FASCIA & LED — 1:5

section at gutter, looking west (W/E fascia: D9/A-501)

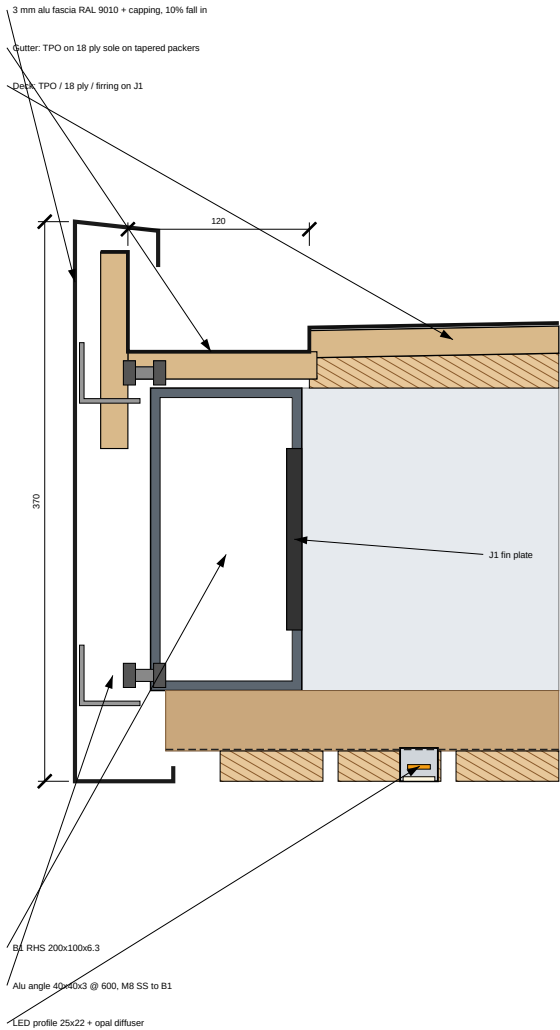

D4 CANOPY / FAÇADE JUNCTION — 1:5

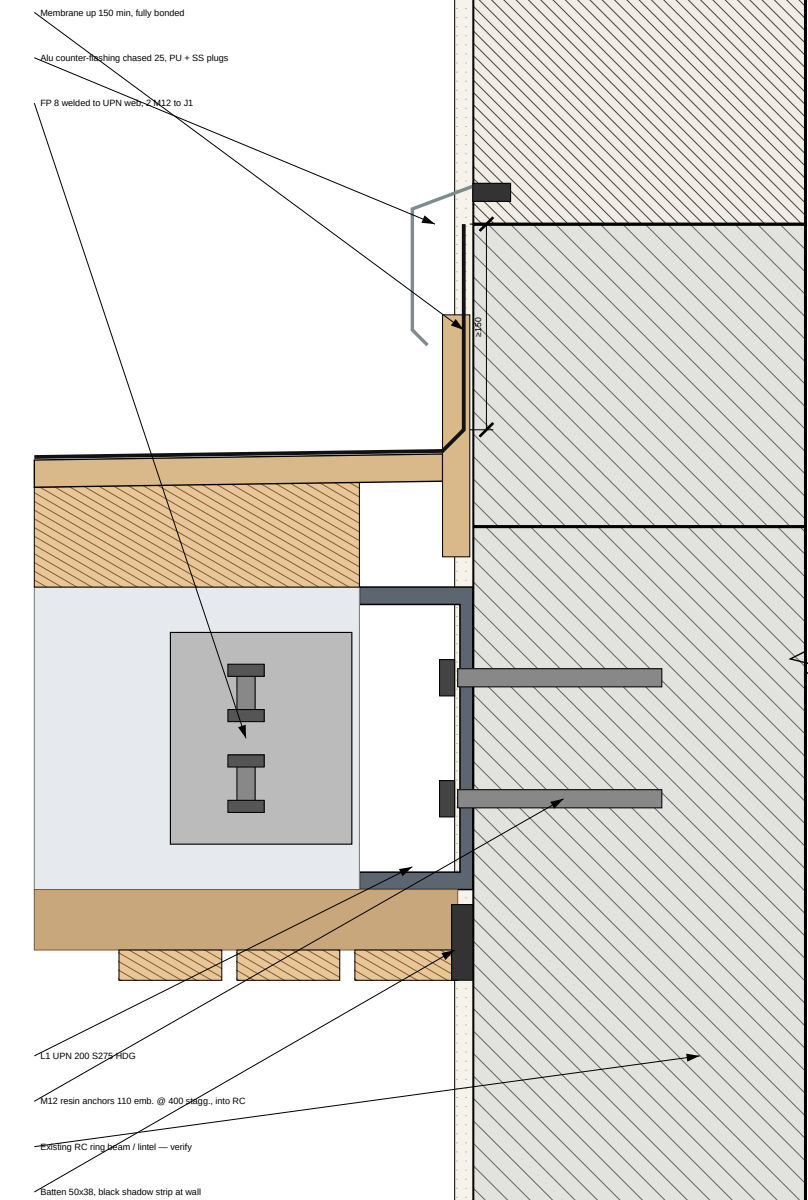

STEEL & FIXINGS

- Structural steel S355J2H (hollow) / S275JR (UPN, plates), EN 1090-2 EXC2, hot-dip galvanised EN ISO 1461 (85 µm min) after fabrication; vent/drain holes to galvaniser's requirements.
- Visible steel (Option B posts): HDG + 2-coat polyester powder (duplex), RAL 9010 matt.
- Bolts 8.8 HDG, washers & nyloc nuts; SS A4-70 for timber & aluminium fixings.
- Isolate aluminium from galvanised steel with EPDM / nylon washers.
- Cut ends & site welds: zinc-rich paint 2 coats (≥ 100 µm).

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

Details 1 — post base, canopy corner, eave/gutter & façade junction

SCALE @ A3

1:10 / 1:5

DRAWN / CHECKED

CC / —

DATE

06.10.2026

SERIES

ARCHITECTURAL


DRAWING No.

REV


A-500

C01

D5 LED PROFILE IN SOFFIT — 1:2

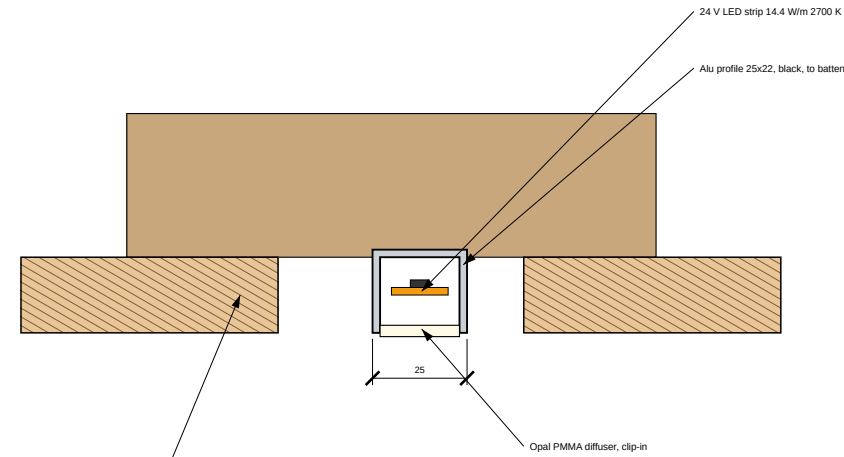


D6 SOFFIT SLAT FIXING — 1:2

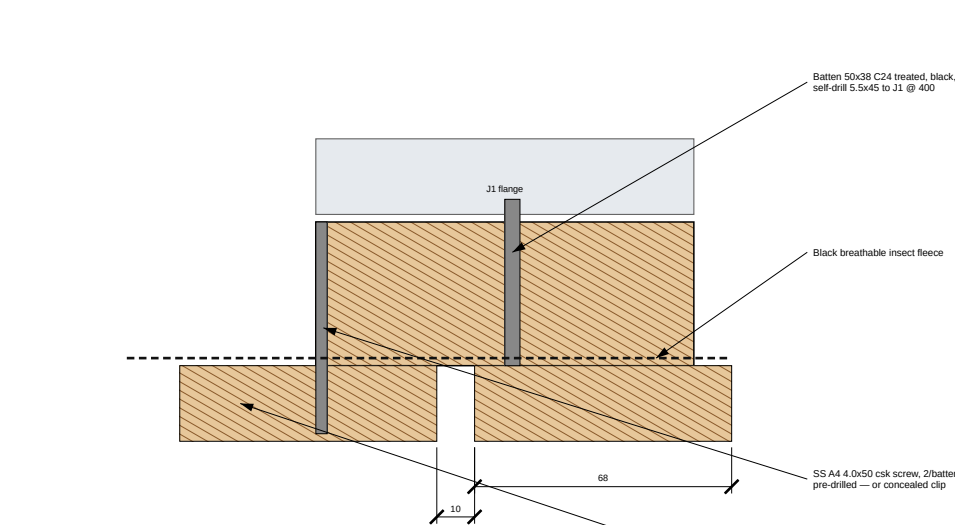


D7 B2 BACK-SPAN (SCHEME S1) — 1:20


Only if survey confirms RC slab & pier. Otherwise use S2 (post P3) — S-100.

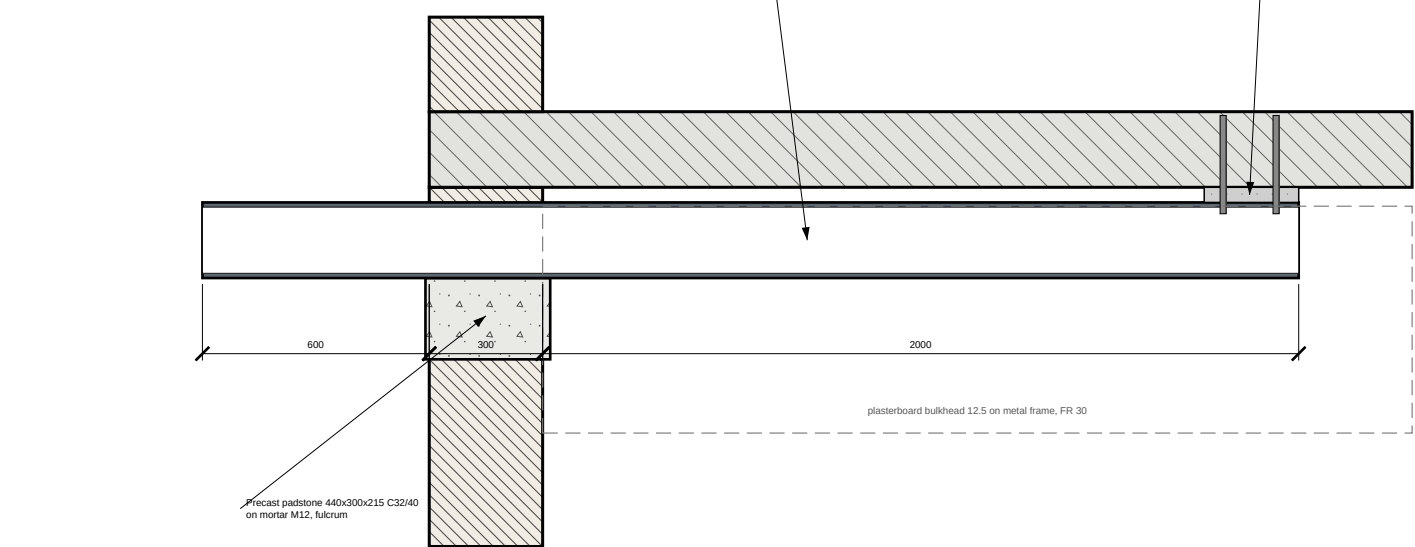

D8 CLIMBING WIRE FIXING — 1:2

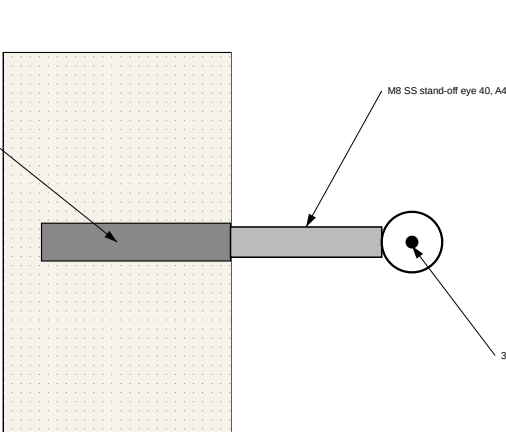

D9 WEST FASCIA & OVERFLOW — 1:5

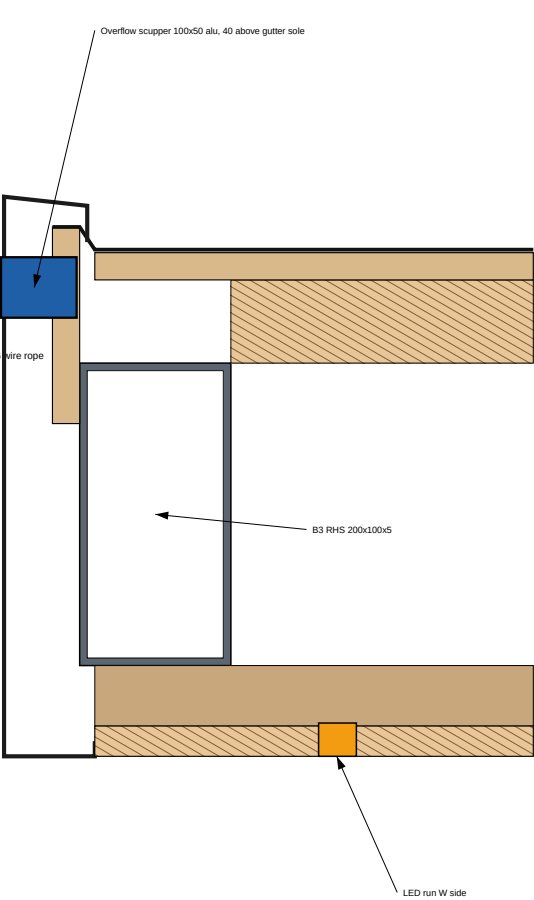

TIMBER

- Soffit slats & cladding: thermally-modified ash (Thermo-D) or Western Red Cedar, clear grade, PEFC/FSC, MC 12–16 %, 68x20 planed all round, ends sealed.
- Finish: 2 coats UV-stable oil (e.g. hard-wax exterior oil, natural/teak tone) all faces before fixing; re-oil every 2–3 years.
- Battens/firings: C24 treated UC3 (EN 351), cut ends re-treated.
- Fasteners: stainless A4; 2 mm min. gap at slat ends; stagger end joints over battens.

ALUMINIUM

- Fascia 3 mm EN AW-5754 H22, folded, max 3.0 m lengths with 3 mm open joints backed by 100 mm sleeve; polyester powder RAL 9010 matt, Qualicoat class 2 (marine/coastal sites).

LIGHTING CONTROL

- Draw wires & junction boxes before soffit close-up; label circuits; test at 1st fix.

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

**Details 2 — LED, soffit, back-span (S1),
fascia edge & climbing wires**

SCALE @ A3

1:2 / 1:5 / 1:20

DRAWN / CHECKED

CC / —

DATE

06.10.2026

SERIES



ARCHITECTURAL

DRAWING No.

A-501

REV

C01

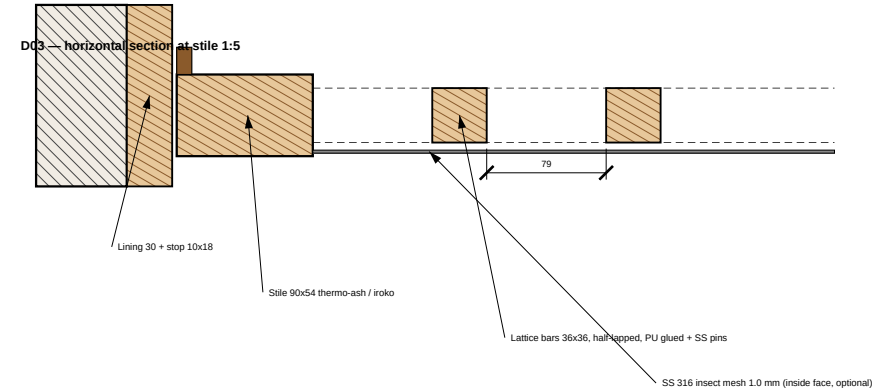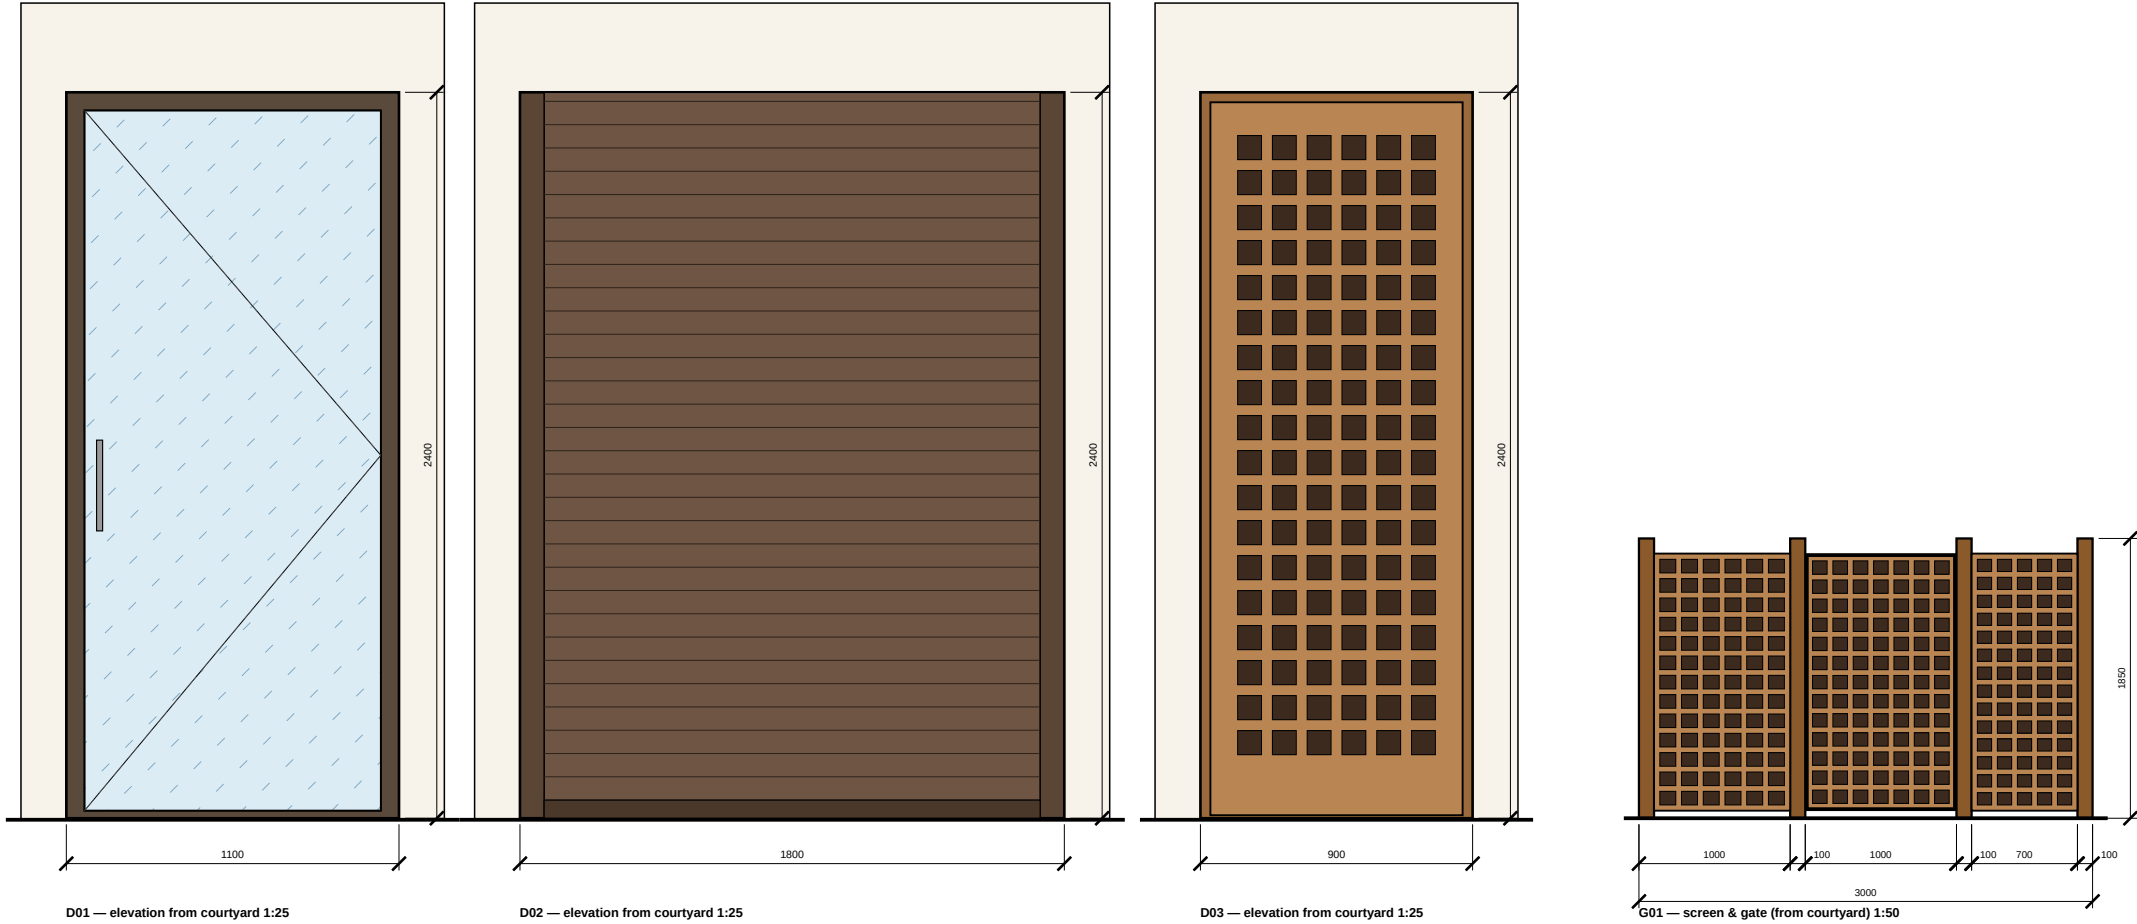

Ref	Location	Size	Description	Ironmongery
D01	Hall entrance	1100 x 2400 S.O.	Thermally-broken aluminium single door, inward opening, slim 60 frame, bronze (RAL 8019 matt or bronze anodised), 6T/16Ar/6T low-e (Ug ≤ 1.1), Uw ≤ 1.6.	Multi-point lock, 3 hinges, 300 SS pull bar, euro cylinder, drop-seal, level threshold ≤ 15 + SD1
D02	Store / workshop	1800 x 2400 S.O.	Insulated aluminium roller shutter, 77 mm double-skin PU-foamed slats, RAL 8019 matt, 80 side guides, 300 coil box concealed inside above head. Wind class 3.	Tubular motor 230 V + manual override, obstacle safety edge, 2 remotes, push-button inside
D03	Utility / plant	900 x 2400 S.O.	Timber lattice ventilated door, outward opening. Leaf 834 x 2357 x 54. Stiles 90, top rail 110, bottom rail 200. Lattice 6 x 18 openings 79 x 80, bars 36. Free vent area = 0.68 m².	3 SS 102 hinges, lever lock (sashlock), SS kick plate inside, door stay, oiled
G01	East screen & gate	3000 x 1800	Thermo-ash lattice screen 45 x 38 bars @ -120, posts 100x100 on HDG post shoes on 400x400x600 pads. Gate leaf 980 x 1680.	2 HD SS strap hinges, gravity latch both sides, drop bolt, gate stop

Joinery notes: all external joinery sizes to be confirmed by site measure after openings are made good. Timber joinery factory-finished all 6 faces (oil), MC 12–15 %. Aluminium systems to EN 14351-1; installation to manufacturer's details with EPDM membranes to reveals, low-expansion PU foam & external silicone (colour matched). D02 coil box requires 300 x 300 clear zone inside head — check interior.

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

Door & screen schedule, elevations & joinery details

SCALE @ A3	DATE
1:25 / 1:20 / 1:5	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	ARCHITECTURAL

DRAWING No. REV

A-600 C01

DESIGN BASIS
• Codes: EN 1990, EN 1991-1-1/-1-3/-1-4, EN 1993-1-1/-1-3/-1-8, EN 1992-1-1, EN 1997-1 (or local equivalents & National Annex values). Consequence class CC1, design life 50 yrs. • Structural system: steel grillage — UPN ledger on façade (pinned), RHS perimeter beams, lipped-C joists spanning N–S, posts P1/P2 pinned at base. Plywood deck forms a horizontal diaphragm, transferring wind & notional loads to the façade ledger (façade = lateral restraint). • East front corner: S1 = cantilever B2 with back-span into annex (as render) S2 = post P3 (alt.).
CHARACTERISTIC LOADS
• Permanent gk = 0.65 kN/m² (steel 0.20, deck 0.15, membrane 0.03, soffit 0.15, services 0.02, vines 0.10) + fascia line 0.25 kN/m. • Imposed (roof cat. H, not combined with snow) qk = 0.75 kN/m², Qk = 1.0 kN. • Snow sk = 1.00 kN/m² (ASSUMED — engineer to set from altitude/zone; check drift against annex parapet). • Wind: qp = 0.70 kN/m² ASSUMED; canopy net cp,net = -1.3 (uplift) / +0.8 → wk,up = 0.91 kN/m².
COMBINATIONS
• ULS gravity 1.35G + 1.5S = 2.38 kN/m² • SLS G + S = 1.65 kN/m² • ULS uplift 1.0G – 1.5W = -0.71 kN/m² (net upward) → HD bolts & pad self-weight checked.
DEFLECTION LIMITS
• Beams L/250 total, L/360 variable; cantilever L/180 (2L/360). Fascia line: precamber B2 (S1) 8 mm.

MATERIALS
• Hollow sections S355J2H EN 10219; UPN & plates S275JR EN 10025-2; cold-formed C S350GD+Z275 EN 10346. • Bolts 8.8 HDG EN 15048 / ISO 4014; HD bolts M16 8.8 HDG; resin anchors with ETA (e.g. vinylester / epoxy, M12 x 110 into C20/25+ concrete, characteristic tension ≥ 15 kN — pull-test 3 no. to 1.5 x working load). • Welds: fillet 6 mm min. all-round to base & cap plates, E42 electrodes; FPs 12 mm. • Concrete C25/30 (pads), C30/37 (kerb); reinforcement B500B.
CONNECTION SCHEDULE (see S-101)
C1 J1 → L1: FP 8x100x170 welded to UPN web, 2 M12 8.8 through J1 web. C2 J1 → B1: FP 8 shop-welded to B1 web, 2 M12 8.8. C3 B1/B3 → P1: FP 12 shop-welded to P1 faces into slotted beam ends, 2 M16 8.8 + 12 mm plug welds. C4 B3 → P2: B3 continuous over P2 cap PL 200x200x12, 4 M12 8.8 through-bolts with spacer tubes. C5 B3/B2 → façade: end PL 10 bolted to UPN / wall via 4 M12 resin anchors. C6 B2 (S1): padstone bearing + tail PL 250x250x15, 4 M16 resin anchors to slab soffit, grout pack. C7 B2 → P3 (S2): as C3. C8 Base plates: PL 250x250x15, 4 M16 HD bolts 180 c/c, 30 grout.
FOUNDATIONS
F1/F2 (F3 for S2): 800x800x700 pad, underside ≥ -0.90 (or to frost depth / firm stratum); Ø12 @ 150 both ways bottom; 300x300 pedestal to +0.390. Blind 50 C12/15.
ENGINEER TO CONFIRM
Existing ring beam & anchor capacity; S1 back-span reaction on slab & pier; site snow/wind; soil bearing; diaphragm fixings (ply to steel: 4.8 self-drilling @ 150 edges / 300 field).

Member	Section / spec	Span / case	MEd / action	Resistance	Util.	Deflection / note
J1 joists	Lipped C 200x65x20x1.8 S350GD+Z275 @ 556 c/c	SS L=2.92 m	1.4	11.3	0.12	1.0 (L/2844)
B1 front beam	RHS 200x100x6.3 S355J2H	SS L=4.60 m	12.0	80.5	0.15	4.8 (L/951)
B3 west beam	RHS 200x100x5 S355J2H	2-span, max 1.65 m	0.5	65.0	0.01	< 1 mm
B2 east beam (S1)	SHS 200x200x12.5 S355J2H, precamber 8 mm	cantilever 3.05 m + back-span 2.0 m	40.9	228.5	0.18	13.3 tip (L/230)
B2 east beam (S2 alt.)	RHS 200x100x6.3 S355J2H on post P3	SS L=3.05 m	2.3	80.5	0.03	< 2 mm
L1 ledger	UPN 200 S275, galv., M12 resin anchors @ 400 stagg.	continuous	V=3.5 kN/m	anchor V,Rd = 6.0 kN	0.23	—
P1/P2 posts	SHS 120x120x6.3 S355J2H (Ø75 RWP inside P1)	pinned, H=2.49 m	N=12.0 kN	Nb,Rd=715 kN	0.02	—
F1/F2 pad footings	800x800x700 C25/30 + 300x300 pedestal	bearing (SLS)	q=33 kPa	allow. ≥ 100 kPa (verify)	0.33	uplift 2.9 kN vs W=12.1 kN
S1 tail anchor	PL 250x250x15 + 4 M16 resin anchors to slab soffit, grout pack	back-span reaction	T=20.4 kN	slab check by engineer	—	—
S1 wall bearing	Precast padstone 440x300x215 C32/40 on façade pier	fulcrum	R=36.8 kN	σ=0.28 MPa	—	—

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off


DRAWING TITLE

Structural design basis, loads & preliminary member checks

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	STRUCTURAL

DRAWING No. REV

S-001C01

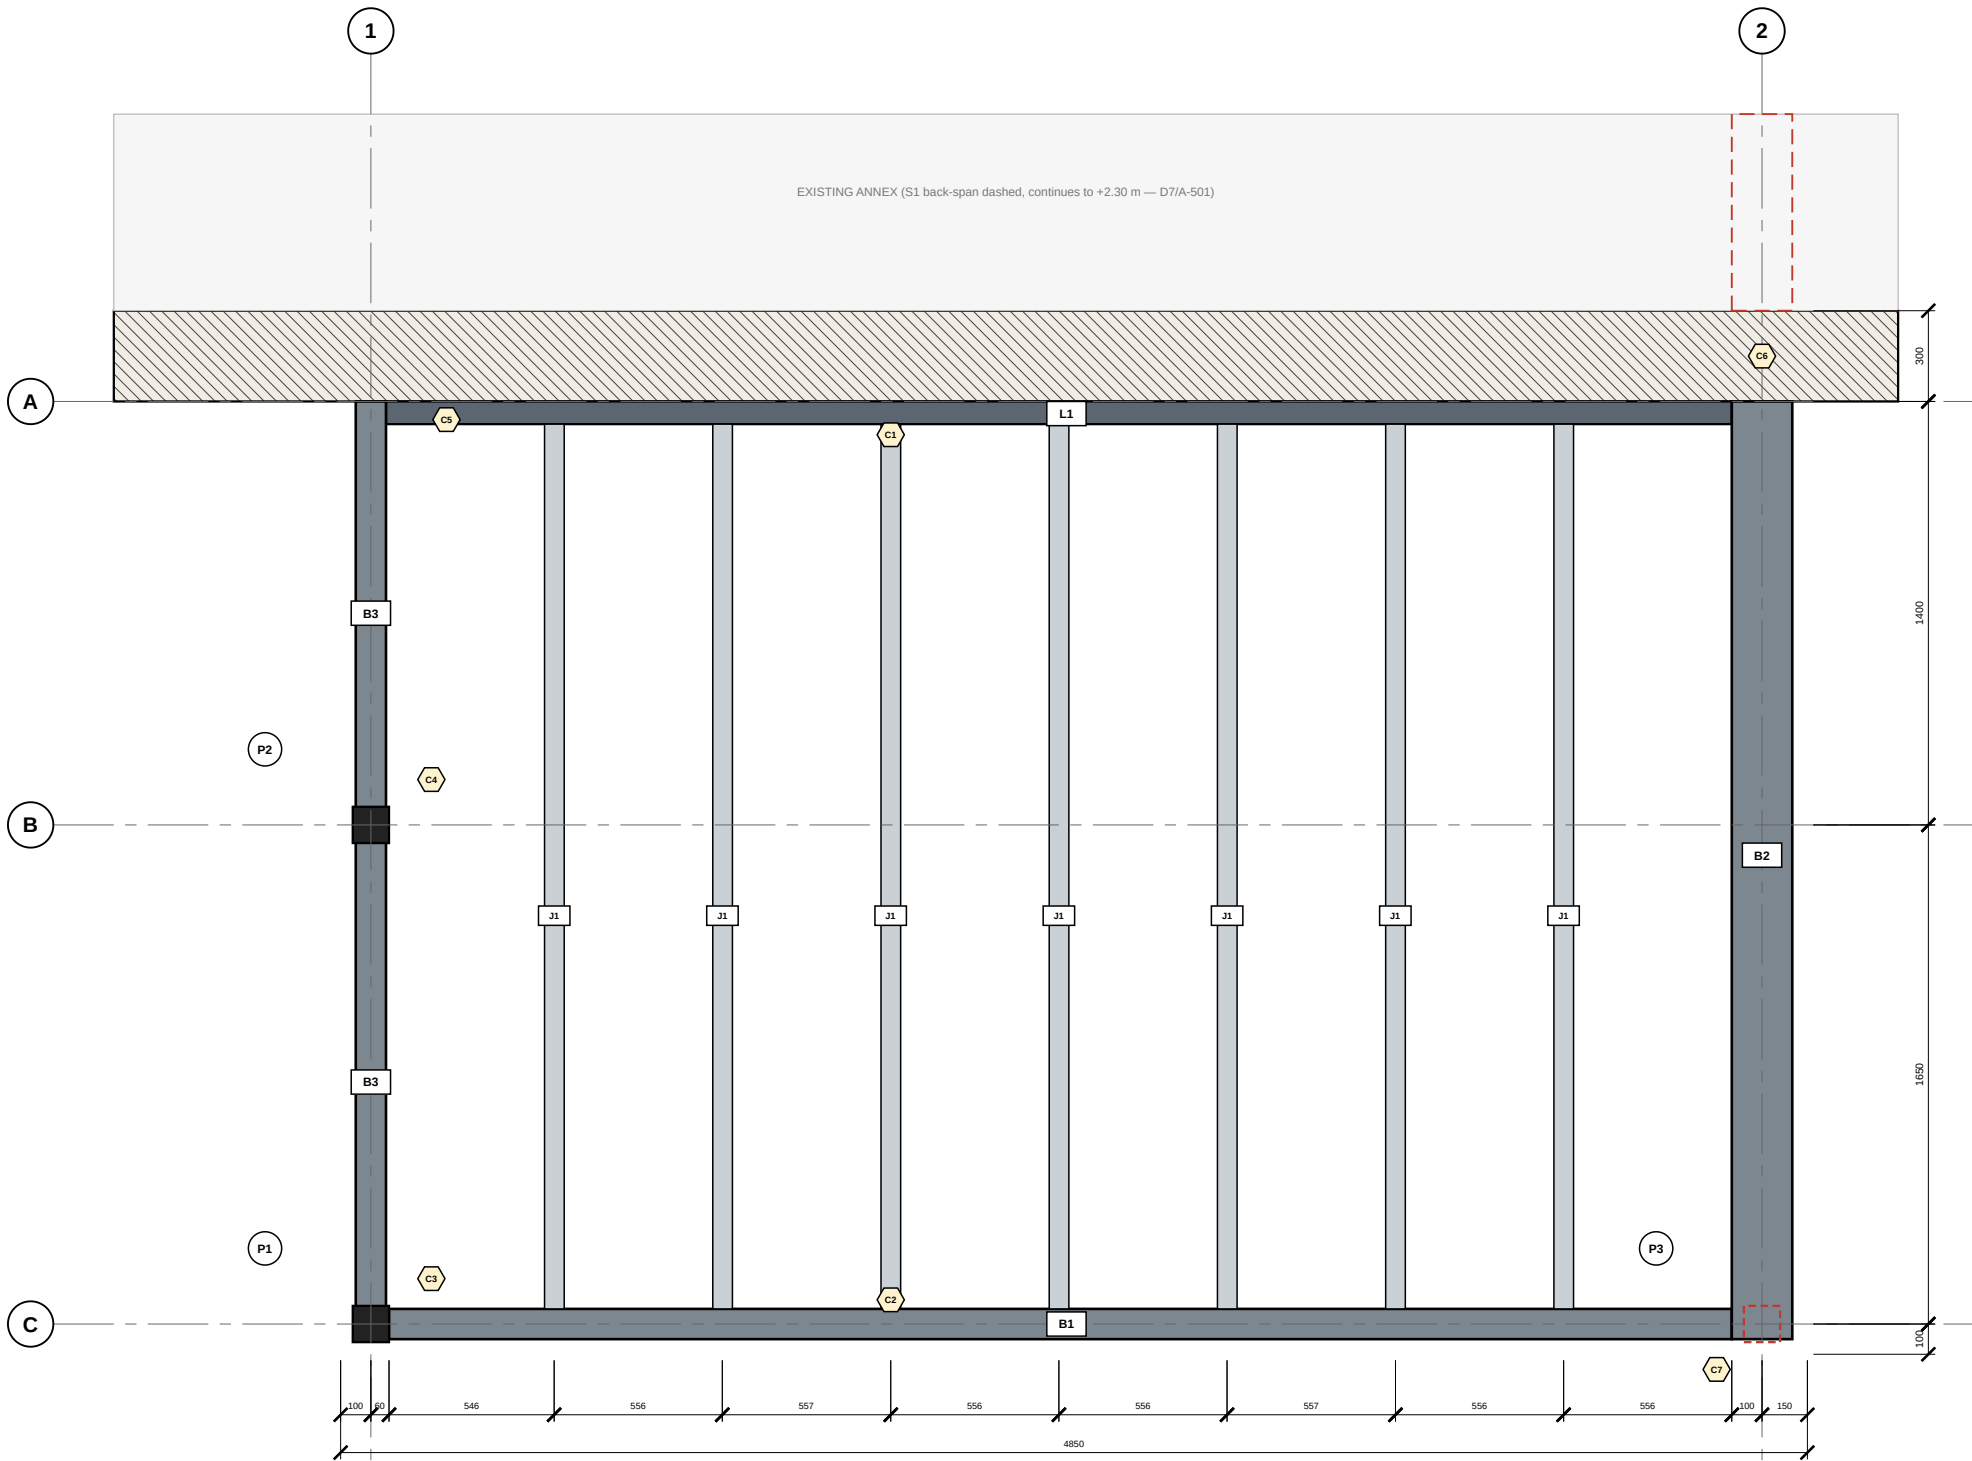

1
S-100

CANOPY FRAMING PLAN @ TOS +2.910

1:25 @ A3 all steel top-flush, BOS +2.710

SCHEME S1 (as render): B2 cantilever SHS 200x200x12.5 + 2.0 m back-span (red dashed).

SCHEME S2 (alternative): add post P3 + pad F3 (red dashed square); B2 becomes RHS 200x100x6.3 simply supported. Engineer to select after survey.

Plywood deck diaphragm: 18 mm ply fixed to J1/beams with 4.8 mm self-drilling wood-to-steel screws @ 150 edges / 300 field. All steel HDG. Temporary bracing until deck fixed. Connections C1–C8: see S-101. Foundations: see S-101 foundation plan & D1/A-500.

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES**
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ± 0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

REVISIONS		
Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off


DRAWING TITLE

Canopy steel framing plan & foundation plan


SCALE @ A3 1:25 / 1:50	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES STRUCTURAL

DRAWING No. **S-100** REV **C01**


C1 J1 -- LEDGER L1 — 1:10

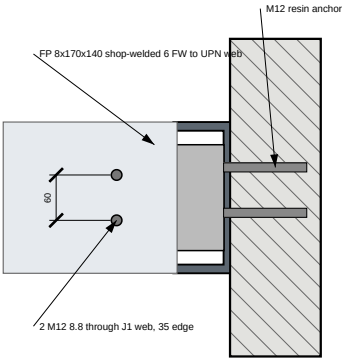


C3 B1 -- P1 (B3 similar) — 1:10

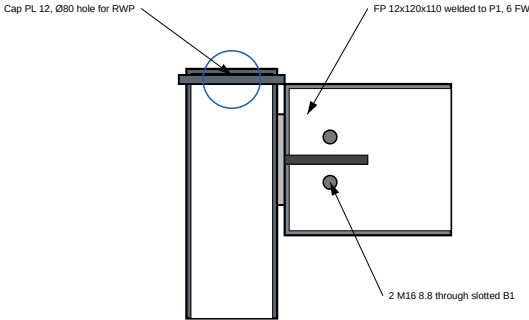


C4 B3 continuous over P2 — 1:10

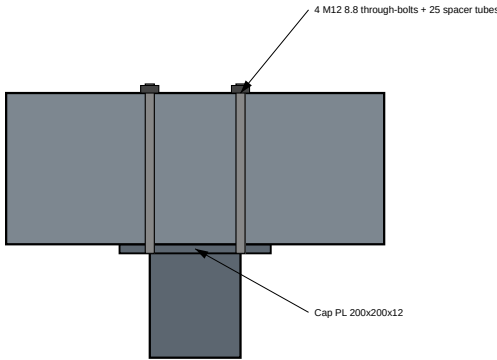

C8 BASE PLATE PL 250x250x15 — plan 1:5

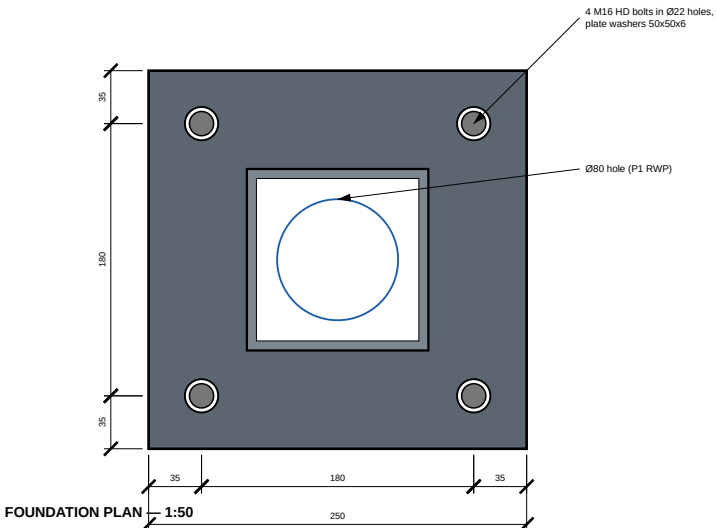

C6 S1 TAIL PLATE — plan 1:10

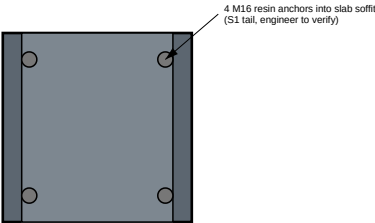

FABRICATION NOTES

- Shop-weld all fin plates, cap & base plates; site connections bolted only (no site welding).
- Slotted ends of RHS for fin plates: slot width 14 for FP 12, seal ends with 3 mm cap plates welded (galvanising vent holes Ø10 at ends, plug after).
- Bolt holes: +2 mm clearance (M12 -- Ø14, M16 -- Ø18); slotted holes in FP for ±5 mm tolerance at L1.
- Pre-camber B2 (S1) 8 mm at tip -- confirm with engineer.
- Torque 8.8 bolts to snug-tight + ¼ turn (non-preloaded).
- Provide temporary bracing until deck diaphragm is fixed.

MEMBER SCHEDULE

Mark	Section	No.	L (m)	kg/m	Mass kg
L1	UPN 200 S275 HDG	1	4.45	25.3	113
B1	RHS 200x100x6.3 S355	1	4.44	28.1	125
B2 (S1)	SHS 200x200x12.5 S355	1	5.40	71.6	387
B2 (S2)	RHS 200x100x6.3 S355	1	3.10	28.1	87
B3	RHS 200x100x5 S355	1	3.00	22.6	68
J1	Lipped C 200x65x20x1.8	7	2.92	5.0	102
P1/P2	SHS 120x120x6.3 S355	2	2.48	21.4	106
P3 (S2)	SHS 120x120x6.3 S355	1	2.48	21.4	53
Plates	Base/cap/FP/tail plates	—	—	—	≈ 45

Total steel ≈ 1.0 t (S1) / 0.7 t (S2) incl. plates — galvanise as 1 batch. Mark all members per this schedule; bolt sets bagged & labelled per connection.

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

DRAWING NOTES

1. Do not scale from this drawing. Use figured dimensions only.
2. All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
3. Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
4. Read with all other architectural, structural & services drawings and the specification notes (A-001).
5. Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
6. Report any discrepancy to the designer before proceeding.

REVISIONS

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

Typical steel connection details

SCALE @ A3 1:5 / 1:10	DATE 06.10.2026
DRAWN / CHECKED CC / —	SERIES STRUCTURAL

DRAWING No. REV

S-101 **C01**

Item	Description	Unit	Qty	Rate / Total
1	PRELIMINARIES & SURVEY			
1.1	Measured, level & structural survey; utility scan	item	1	
1.2	Site set-up, protection, skip hire, clean	item	1	
2	EARTHWORKS & DRAINAGE			
2.1	Strip pavingtopsoil to formation, dispose	m³	15.2	
2.2	Excavate pads F1/F2 (+F3 S2) 0.8x0.8x0.95	m³	1.22	
2.3	Excavate kerb strip footing 0.45 wide	m³	2.50	
2.4	Ø110 PVC-U SN8 drain incl. bedding & surround	m	22	
2.5	SD1 slot drain 100 mm, B125, incl. outlet	m	5.0	
2.6	Yard gully 300 with silt bucket & grate	no	2	
2.7	IC1 inspection chamber Ø450	no	1	
2.8	SA1 soakaway crate 1.0 m³ incl. geotextile (or connect to SW)	item	1	
3	CONCRETE			
3.1	Blinding C12/15 50 mm	m²	5.5	
3.2	Pads C25/30 800x800x700 incl. rebar Ø12 @150 BW	no	2 (+1 S2)	
3.3	Pedestals 300x300 incl. 4Ø12 + links, cast-in bolts	no	2 (+1 S2)	
3.4	Kerb strip footing 450x250 C25/30, 3Ø12	m	8.55	
3.5	Kerb upstand 135x(1050) C30/37 incl. Ø10 @300	m	8.55 + 0.85	
4	STRUCTURAL STEEL (S-100)			
4.1	Supply, fabricate, HDG & erect steel per schedule (S1)	t	1.0	
4.1a	Alternative S2 (incl. P3) — deduct/add	t	0.7	
4.2	M12 resin anchors to façade incl. pull tests	no	30	
4.3	S1 padstone + tail anchorage + bulkhead	item	1	
5	ROOFING			
5.1	Tapered firings C24	m	27	
5.2	18 mm marine plywood deck	m²	15.3	
5.3	1.5 mm TPO membrane incl. upstands, gutter lining	m²	18.8	
5.4	Outlet O1 Ø63 + leaf guard; overflow scupper	item	1	
5.5	Alu counter-flashing chased to façade	m	4.9	
6	FASCIA, SOFFIT & CLADDING			
6.1	3 mm alu fascia & capping RAL 9010, 370 high	m	11.2	
6.2	Soffit battens 50x38 treated	m	34	
6.3	Thermo-ash slats 68x20 (+10% waste)	m	215	

Item	Description	Unit	Qty	Rate / Total
6.4	Black insect fleece	m²	15.3	
6.5	Post cladding 20 mm thermo-ash, 160 sq. h 2.25	no	2	
7	PLANTER & WALLS			
7.1	Tanking slurry + HDPE drainage sheet	m²	12.5	
7.2	Drainage gravel 100 + geotextile	m²	7.0	
7.3	Topsoil + compost (450) & mulch (50)	m³	3.51	
7.4	Precast coping 230x60	m	9.4	
7.5	Render 2 coats + paint, kerb external faces	m²	4.3	
7.6	Repair & repaint boundary wall & façade	m²	40	
7.7	SS climbing wires 3 mm incl. eyes & tensioners	m	70	
8	PAVING			
8.1	Type 1 sub-base 150 + geotextile	m²	52.1	
8.2	Sand bed 30 + 200x200x60 pavers 3-tone + jointing	m²	52.1	
8.3	(paver count 1302 + 5% = 1368)	no	1368	
8.4	PCC edging 50x150 S edge on haunch	m	6.2	
9	JOINERY & DOORS (A-600)			
9.1	D01 alu glazed door 1100x2400 incl. ironmongery	no	1	
9.2	D02 insulated roller shutter 1800x2400 motorised	no	1	
9.3	D03 timber lattice door 900x2400 incl. lining	no	1	
9.4	G01 lattice screen 3.0 m x 1.8 incl. gate & posts	item	1	
10	ELECTRICAL & LIGHTING (A-103)			
10.1	LS1 LED strip + profiles + drivers	m	10.6	
10.2	DL1 downlights / WL1 wall light / UL1-6 spikes	no	2 / 1 / 6	
10.3	Circuits, RCBOs, socket SO1, controls, testing	item	1	
11	SOFT LANDSCAPE & IRRIGATION (A-104)			
11.1	Plants per schedule incl. olive & pot	item	1	
11.2	Drip irrigation system incl. controller	item	1	
12	CONTINGENCY (existing structure risk)	%	10	

COURTYARD CANOPY & GARDEN TERRACE

Private residence — rear courtyard (site address to be inserted)
Client: Owner / Client
Design & drawings: Claude Code

- DRAWING NOTES
- Do not scale from this drawing. Use figured dimensions only.
 - All dimensions in millimetres; levels in metres relative to internal FFL ±0.000 (datum to be tied to site survey).
 - Contractor to verify all dimensions, levels & existing structure on site before fabrication or ordering.
 - Read with all other architectural, structural & services drawings and the specification notes (A-001).
 - Structural members are preliminary: final design, connections & calculations by a licensed structural engineer to local code before construction.
 - Report any discrepancy to the designer before proceeding.

Rev	Date	Description
C01	06.10.2026	Issued for construction / tender
P01	05.10.2026	Concept (client renders)

CONSTRUCTION ISSUE — subject to site survey & local engineer sign-off

DRAWING TITLE

Bill of quantities (tender schedule — rates by contractor)

SCALE @ A3	DATE
NTS	06.10.2026
DRAWN / CHECKED	SERIES
CC / —	QUANTITIES

DRAWING No. REV

Q-001C01